



PEM Enterprise Features Guide

Release 8.4.0

EDB

Apr 14, 2022

CONTENTS

1	The PEM Query tool	3
1.1	The SQL editor panel	6
1.2	The Data Output panel	8
1.2.1	Data Output tab	8
1.2.2	Explain tab	9
1.2.3	Graphical tab	10
1.2.4	Analysis tab	11
1.2.5	Statistics tab	12
1.2.6	Messages tab	12
1.2.7	Notifications tab	13
1.3	Query History panel	15
1.4	Connection status	15
1.5	Macros	16
2	The PEM Schema Diff tool	21
2.1	Schema Diff object comparison panel	21
2.2	Schema Diff DDL comparison panel	23
3	The ERD tool	27
3.1	Toolbar	27
3.2	File options	27
3.3	Export options	29
3.4	Editing options	29
3.5	Table relationship options	29
3.6	Utility Options	30
3.7	Zoom options	30
3.8	Table dialog	30
3.9	Table node	31
3.10	One to many link dialog	31
3.11	Many to many link dialog	32
3.12	Table link	32
3.13	Table notes	34
4	Performance monitoring and management	35
4.1	Using dashboards to view performance information	35
4.2	Managing custom dashboards	38
4.2.1	Creating a custom dashboard	39
4.2.2	Creating an Ops dashboard	42
4.3	Using the Manage Charts tab	43
4.3.1	Creating a custom chart	44

4.3.2	Importing a Capacity Manager Template	48
4.4	Probes	52
4.4.1	System probes	52
4.4.2	BDR probes	56
4.4.3	Customizing probes	60
4.4.4	Creating a custom probe	61
4.4.5	Exporting or importing a probe	65
4.4.6	Deleting a probe	68
4.4.7	Copying a probe	68
4.5	Alerting	69
4.5.1	Viewing the alerts via Global dashboard	69
4.5.2	Viewing the alerts via Alerts dashboard	70
4.5.3	Customizing the Alerts dashboard	70
4.5.4	Managing alerts	72
4.5.5	Alert templates	73
4.5.6	Audit log alerting	78
4.5.7	Alerts	79
4.5.8	Schedule an alert blackout	89
4.6	Notifications	91
4.6.1	SMTP	92
4.6.2	Creating an email group	92
4.6.3	Deleting an Email Group	94
4.6.4	Webhook	94
4.6.5	Creating a webhook	95
4.6.6	Defining webhook SSL configurations	96
4.6.7	Deleting a webhook	99
4.6.8	SNMP	99
4.6.9	Example - Configure SNMP V3 traps with net-snmp trap receiver	99
4.6.10	Using PEM with Nagios	100
4.6.11	Enabling Nagios notification for an alert	100
4.6.12	Configuring Nagios-related behavior of the PEM Server	102
4.6.13	Creating the hosts.cfg and services.cfg file	103
4.6.14	Modifying the Nagios configuration file	103
5	Performance Diagnostic	105
6	Capacity Manager	111
6.1	Capacity Manager templates	115
7	Audit Manager	117
7.1	Setting the Advanced Server instance service ID	117
7.2	Setting the EDB Audit Configuration probe	118
7.3	Configuring audit logging with the Audit Manager	118
7.4	Viewing the log with the Audit Log dashboard	123
8	Log Manager	127
8.1	Reviewing the Server Log Analysis dashboard	134
8.2	Postgres Log Analysis Expert	136
8.3	Reviewing the Postgres Log Analysis Expert report	142
9	SQL profiling and analysis	143
9.1	Creating a new SQL trace	144
9.1.1	Creating a trace	144
9.1.2	Opening an existing trace	146
9.1.3	Filtering a trace	147

9.1.4	Deleting a trace	148
9.1.5	Viewing scheduled traces	148
9.2	Using the index advisor	149
10	Tuning Wizard	151
11	Postgres Expert - best practice enforcement	157
11.1	Using the Postgres Expert wizard	157
11.2	Reviewing Postgres Expert recommendations	160
12	Monitoring BDR nodes	163
13	Prerequisites for monitoring Barman	165
14	Configuring a Barman Server	167
14.1	Using PEM web client	167
14.1.1	Configure	167
14.1.2	Editing	168
14.2	Using pemworker command line	169
15	Viewing the Barman Server details on a PEM dashboard	173
16	Monitoring Failover Manager	177
16.1	Replacing a primary node	178
16.2	Switchover EFM cluster	179
17	Monitoring an xDB Replication cluster	181
18	Reports	183
18.1	System Configuration Report	183
18.2	Core Usage report	184
19	Reference	189
19.1	PEM server configuration parameters - reference	189
19.2	Capacity Manager metrics - reference	197
19.3	PEM probes – reference	200
19.4	PEM pre-defined alert templates – reference	203
19.4.1	Templates applicable on agent	204
19.4.2	Templates applicable on server	205
19.4.3	Templates applicable on database	208
19.4.4	Templates applicable on schema	210
19.4.5	Templates applicable on table	211
19.4.6	Global templates	212

This guide will acquaint you with the tools and wizards that are built into the Postgres Enterprise Manager (PEM) web interface that make it easier for you to monitor and manage your system.

This guide is not a comprehensive resource; rather, it is meant to serve as an aid to help you evaluate the tool and bring you up to speed with the basics of how to use the product. For more detailed information about using PEM's functionality, please see the online help made available by the PEM client.

This document uses **Postgres** to mean either the PostgreSQL or EDB Postgres Advanced Server database or EDB Postgres Extended (formerly known as 2ndQPostgres).


what's_new pem_query_tool pem_schema_diff_tool pem_erd_tool performance_monitoring_and_management
capacity_manager audit_manager log_manager sql_profiler tuning_wizard postgres_expert reports monitor-
ing_BDR_node monitoring_failover_manager monitoring_xdb_replication_cluster performance_diagnostic reference
conclusion

THE PEM QUERY TOOL

PEM contains a feature-rich Interactive Development Environment (IDE) that allows you to issue ad-hoc SQL queries against Postgres servers.

You can access the Query Tool via the Query Tool menu option on the Tools menu, or through the context menu of select nodes of the Browser tree control. The Query Tool allows you to:

- Issue ad-hoc SQL queries.
- Execute arbitrary SQL commands.
- Edit the result set of a SELECT query if it is updatable .
- Displays current connection and transaction status as configured by the user.
- Save the data displayed in the output panel to a CSV file.
- Review the execution plan of a SQL statement in either a text, a graphical format or a table format (similar to <https://explain.depesz.com>).
- View analytical information about a SQL statement.

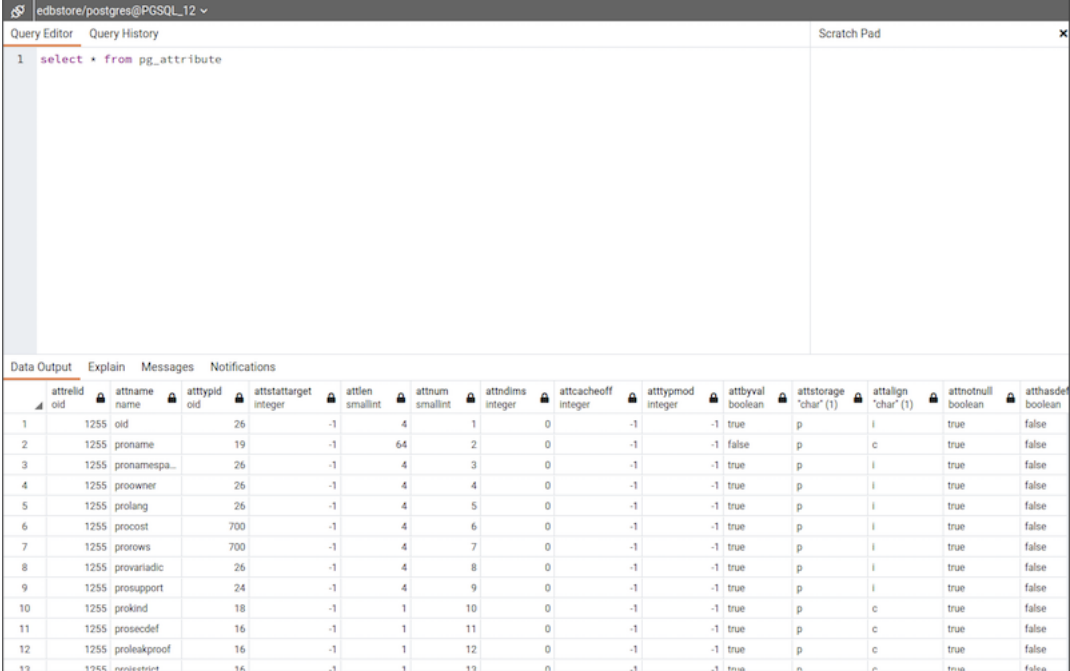

The screenshot shows the PEM Query Tool interface. At the top, there's a connection dropdown set to 'edbstore/postgres@PGSQL_12'. Below it are tabs for 'Query Editor', 'Query History', and 'Scratch Pad'. The 'Query Editor' tab contains a single SQL query: '1 select * from pg_attribute'. Below the editor is a 'Data Output' tab showing the results of the query as a table. The table has 16 columns representing various attributes of the pg_attribute table, and 13 rows of data.

	attrelid oid	attname name	atttypid oid	attstattarget integer	attlen smallint	attnum smallint	attnums integer	attcacheoff integer	atttypmod integer	attbyval boolean	attstorage 'char' (1)	attalign 'char' (1)	attnotnull boolean	attisdef boolean
1	1255	oid	26	-1	4	1	0	-1	-1	true	p	i	true	false
2	1255	prname	19	-1	64	2	0	-1	-1	false	p	c	true	false
3	1255	prnamespa...	26	-1	4	3	0	-1	-1	true	p	i	true	false
4	1255	proowner	26	-1	4	4	0	-1	-1	true	p	i	true	false
5	1255	prolang	26	-1	4	5	0	-1	-1	true	p	i	true	false
6	1255	procost	700	-1	4	6	0	-1	-1	true	p	i	true	false
7	1255	prorows	700	-1	4	7	0	-1	-1	true	p	i	true	false
8	1255	provariadic	26	-1	4	8	0	-1	-1	true	p	i	true	false
9	1255	prosupport	24	-1	4	9	0	-1	-1	true	p	i	true	false
10	1255	prokind	18	-1	1	10	0	-1	-1	true	p	c	true	false
11	1255	prosecdef	16	-1	1	11	0	-1	-1	true	p	c	true	false
12	1255	proleakproof	16	-1	1	12	0	-1	-1	true	p	c	true	false
13	1965	proisstrict	16	-1	1	13	0	-1	-1	true	p	c	true	false

Fig. 1: Query Tool tab

You can open multiple copies of the Query tool in individual tabs simultaneously. To close a copy of the Query tool, click the *X* in the upper-right hand corner of the tab bar.

The Query Tool features two panels:

- The upper panel displays the SQL Editor . You can use the panel to enter, edit, or execute a query. It also shows the History tab which can be used to view the queries that have been executed in the session, and a Scratch Pad which can be used to hold text snippets during editing. If the Scratch Pad is closed, it can be re-opened (or additional ones opened) by right-clicking in the SQL Editor and other panels and adding a new panel.
- The lower panel displays the Data Output panel. The tabbed panel displays the result set returned by a query, information about a query's execution plan, server messages related to the query's execution and any asynchronous notifications received from the server.

TheQueryToolToolbar

The Query Tool toolbar uses context-sensitive icons that provide shortcuts to frequently performed tasks. If an icon is highlighted, the option is enabled; if the icon is grayed-out, the task is disabled.




Fig. 2: Query Tool Toolbar

Hover over an icon to display a tool-tip that describes the icon's functionality:

Icon	Behavior	Shortcut
<i>Open File</i>	Click the <i>Open File</i> icon to display a previously saved query in the SQL Editor.	Accesskey + O
<i>Save</i>	Click the <i>Save</i> icon to perform a quick-save of a previously saved query, or to access the Save menu: - Select <i>Save</i> to save the selected content of the SQL Editor panel in a file. - Select <i>Save As</i> to open a new browser dialog and specify a new location to which to save the selected content of the SQL Editor panel.	Accesskey + S
<i>Save Data Changes</i>	Click the <i>Save Data Changes</i> icon to save the data changes (insert, update, or delete) in the Data Output Panel to the server.	F6
<i>Find</i>	Use the <i>Find</i> menu to search, replace, or navigate the code displayed in the SQL Editor: - Select <i>Find</i> to provide a search target, and search the SQL Editor contents. - Select <i>Find next</i> to locate the next occurrence of the search target. - Select <i>Find previous</i> to move to the last occurrence of the search target. - Select <i>Persistent find</i> to identify all occurrences of the search target within the editor. - Select <i>Replace</i> to locate and replace (with prompting) individual occurrences of the target. - Select <i>Replace all</i> to locate and replace all occurrences of the target within the editor. - Select <i>Jump</i> to navigate to the next occurrence of the search target.	Cmd+F Cmd+G Cmd+Shift+G<
<i>Copy</i>	Click the <i>Copy</i> icon to copy the content that is currently highlighted in the Data Output panel. when in View/Edit data mode.	Accesskey + C
<i>Paste</i>	Click the <i>Paste</i> icon to paste a previously row into a new row when in View/Edit data mode.	Accesskey + P
<i>Delete</i>	Click the <i>Delete</i> icon to mark the selected rows for deletion. These marked rows get deleted when you click the <i>Save Data Changes</i> icon.	Accesskey + D

continues on next page

Table 1 – continued from previous page

Icon	Behavior	Shortcut
<i>Edit</i>	Use options on the <i>Edit</i> menu to access text editing tools; the options operate on the text displayed in the SQL Editor panel when in Query Tool mode: - Select <i>Indent Selection</i> to indent the currently selected text. - Select <i>Unindent Selection</i> to remove indentation from the currently selected text. - Select <i>Inline Comment Selection</i> to enclose any lines that contain the selection in SQL style comment notation. - Select <i>Inline Uncomment Selection</i> to remove SQL style comment notation from the selected line. - Select <i>Block Comment</i> to enclose all lines that contain the selection in C style comment notation. This option acts as a toggle.	Tab Shift+Tab Cmd+ Cmd-
<i>Filter</i>	Click the <i>Filter</i> icon to set filtering and sorting criteria for the data when in View/Edit data mode. Click the down arrow to access other filtering and sorting options: - Click <i>Sort/Filter</i> to open the sorting and filtering dialogue. - Click <i>Filter by Selection</i> to show only the rows containing the values in the selected cells. - Click <i>Exclude by Selection</i> to show only the rows that do not contain the values in the selected cells. - Click <i>Remove Sort/Filter</i> to remove any previously selected sort or filtering options.	Accesskey + F
<i>Limit Selector</i>	Select a value in the <i>Limit Selector</i> to limit the size of the dataset to a number of rows.	Accesskey + R
<i>Stop</i>	Click the <i>Stop</i> icon to cancel the execution of the currently running query.	Accesskey + Q
<i>Execute/Refresh</i>	Click the <i>Execute/Refresh</i> icon to either execute or refresh the query highlighted in the SQL editor panel. Click the down arrow to access other execution options: - Add a check next to <i>Auto-Rollback</i> to instruct the server to automatically roll back a transaction if an error occurs during the transaction. - Add a check next to <i>Auto-Commit</i> to instruct the server to automatically commit each transaction. Any changes made by the transaction will be visible to others, and durable in the event of a crash.	F5
<i>Explain</i>	Click the <i>Explain</i> icon to view an explanation plan for the current query. The result of EXPLAIN is displayed graphically on the <i>Explain</i> tab of the output panel, and in text form on the <i>Data Output</i> tab.	F7
<i>Explain analyze</i>	Click the <i>Explain analyze</i> icon to invoke an EXPLAIN ANALYZE command on the current query. Navigate through the Explain Options menu to select options for the EXPLAIN command: - Select <i>Verbose</i> to display additional information regarding the query plan. - Select <i>Costs</i> to include information on the estimated startup and total cost of each plan node, as well as the estimated number of rows and the estimated width of each row. - Select <i>Buffers</i> to include information on buffer usage. - Select <i>Timing</i> to include information about the startup time and the amount of time spent in each node of the query. - Select <i>Summary</i> to include the summary information about the query plan.	
<i>Commit</i>	Click the <i>Commit</i> icon to commit the transaction.	Shift+CTRL+M
<i>Rollback</i>	Click the <i>Rollback</i> icon to rollback the transaction.	Shift+CTRL+R

continues on next page

Table 1 – continued from previous page

Icon	Behavior	Shortcut
<i>Clear</i>	Use options on the <i>Clear</i> drop-down menu to erase display contents: - Select <i>Clear Query Window</i> to erase the content of the SQL Editor panel. - Select <i>Clear History</i> to erase the content of the <i>History</i> tab.	Accesskey + L
<i>Download as CSV</i>	Click the <i>Download as CSV</i> icon to download the result set of the current query to a comma-separated list. You can specify the CSV settings through <i>Preferences -> SQL Editor -> CSV output</i> dialogue.	F8
<i>Macros</i>	Click the <i>Macros</i> icon to manage the macros. You can create, edit or clear the <i>macros</i> through Manage Macros option.	

1.1 The SQL editor panel

The SQL editor panel is a workspace where you can manually provide a query, copy a query from another source, or read a query from a file. The SQL editor features syntax coloring and auto-completion.

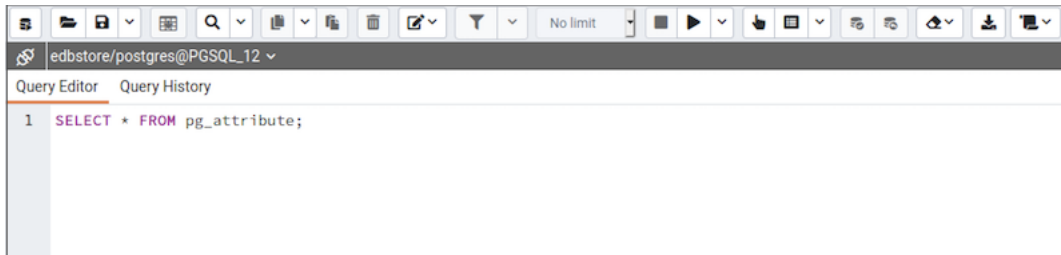


Fig. 3: Query Tool - Query Editor tab

To use auto-complete, begin typing your query; when you would like the Query editor to suggest object names or commands that might be next in your query, press the Control+Space key combination. For example, type *SELECT * FROM* (with a trailing space), and then press the Control+Space key combination to select from a popup menu of auto-complete options.

After entering a query, select the **Execute/Refresh** icon from the toolbar. The complete contents of the SQL editor panel will be sent to the database server for execution. To execute only a section of the code that is displayed in the SQL editor, highlight the text that you want the server to execute, and click the **Execute/Refresh** icon.

The message returned by the server when a command executes is displayed on the **Messages** tab. If the command is successful, the **Messages** tab displays execution details.

Options on the **Edit** menu offer functionality that helps with code formatting and commenting:

- The auto-indent feature will automatically indent text to the same depth as the previous line when you press the Return key.
- Block indent text by selecting two or more lines and pressing the Tab key.
- Implement or remove SQL style or toggle C style comment notation within your code.

You can also drag and drop certain objects from the tree-view to save time spent typing long object names. Text containing the object name will be fully qualified with the schema name. Double quotes will be added if required. For functions and procedures, the function name along with parameter names will be pasted in the Query Tool.

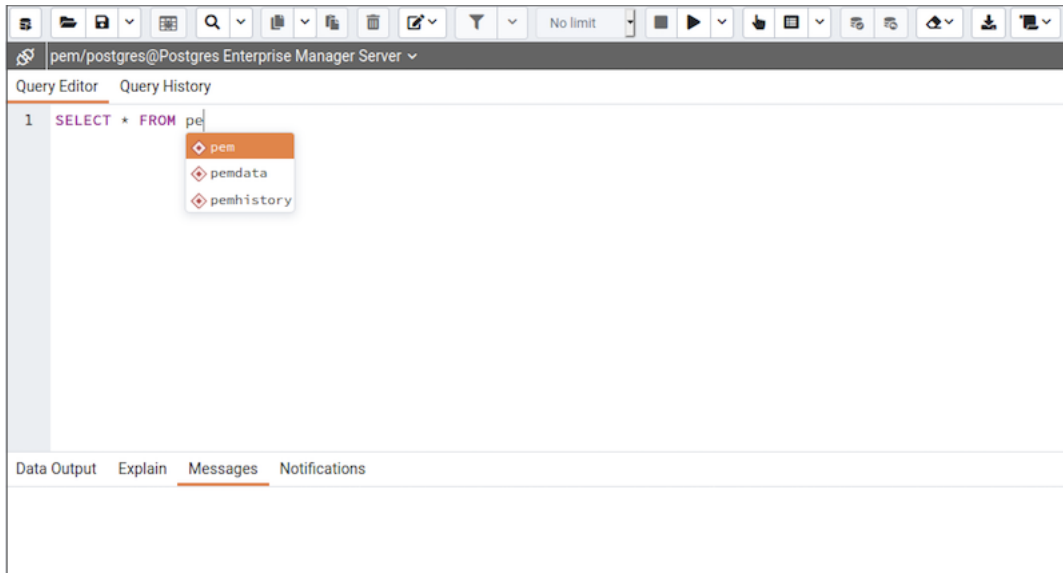


Fig. 4: Query Tool - Query Editor tab

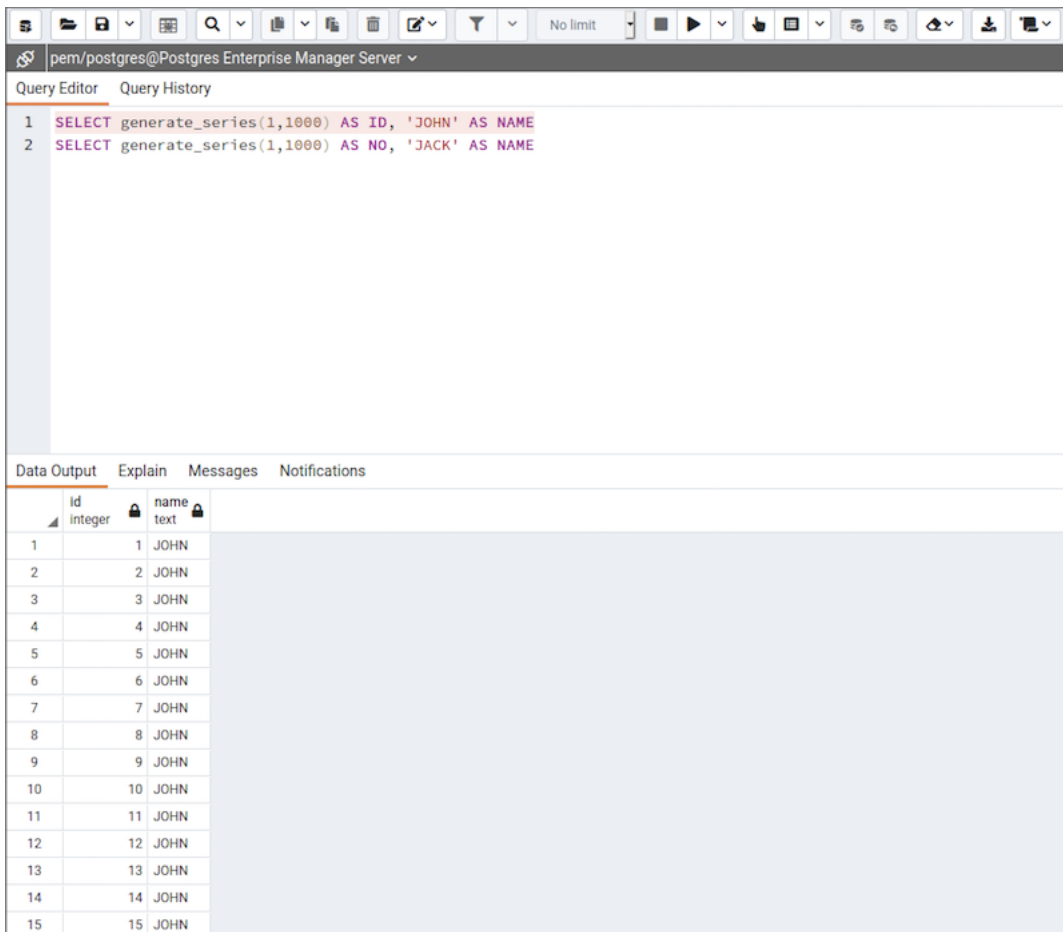


Fig. 5: Query Tool - Query Editor tab - Autocomplete feature

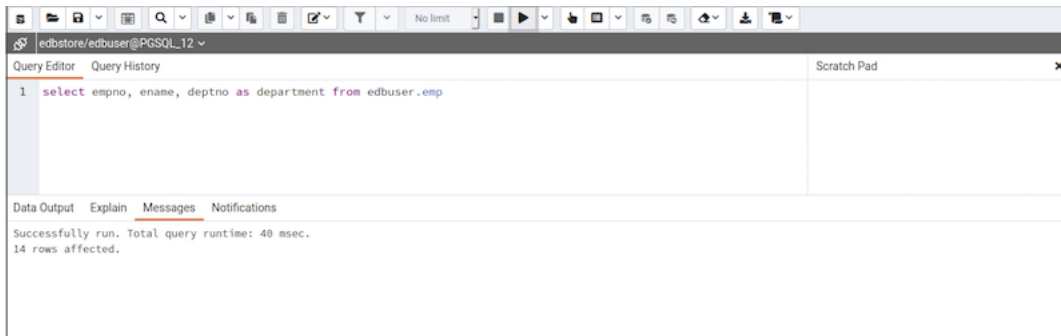


Fig. 6: Query Tool - Query Editor - Message tab

1.2 The Data Output panel

The Data Output panel displays data and statistics generated by the most recently executed query.

	old oid	datname	datdba	encoding	datcollate	datatype	datistemplate	dataallowconn	datconnlimit	datlastsysoid
1	13432	postgres	10	6	en_IN	en_IN	false	true	-1	13431
2	16389	edbstore	16388	6	en_IN	en_IN	false	true	-1	13431
3	1	template1	10	6	en_IN	en_IN	true	true	-1	13431
4	13431	template0	10	6	en_IN	en_IN	true	false	-1	13431

Fig. 7: Query Tool - Data output tab

1.2.1 Data Output tab

The Data Output tab displays the result set of the query in a table format. You can:

- Select and copy from the displayed result set.
- Use the Execute/Refresh options to retrieve query execution information and set query execution options.
- Use the Download as CSV icon to download the content of the Data Output tab as a comma-delimited file.
- Edit the data in the result set of a SELECT query if it is updatable.

A result set is updatable if:

- All columns are either selected directly from a single table, or they are not actually a table column (for example, the concatenation of two columns). Only columns that are selected directly from the table are editable, other columns are read-only.
- All the primary key columns or OIDs of the table are selected in the result set.

Any columns that are renamed or selected more than once are also read-only.

Note: To work with an updatable query result set, you must have *psycopg2* driver version 2.8 or above installed.

Editable and read-only columns are identified using pencil and lock icons (respectively) in the column headers.

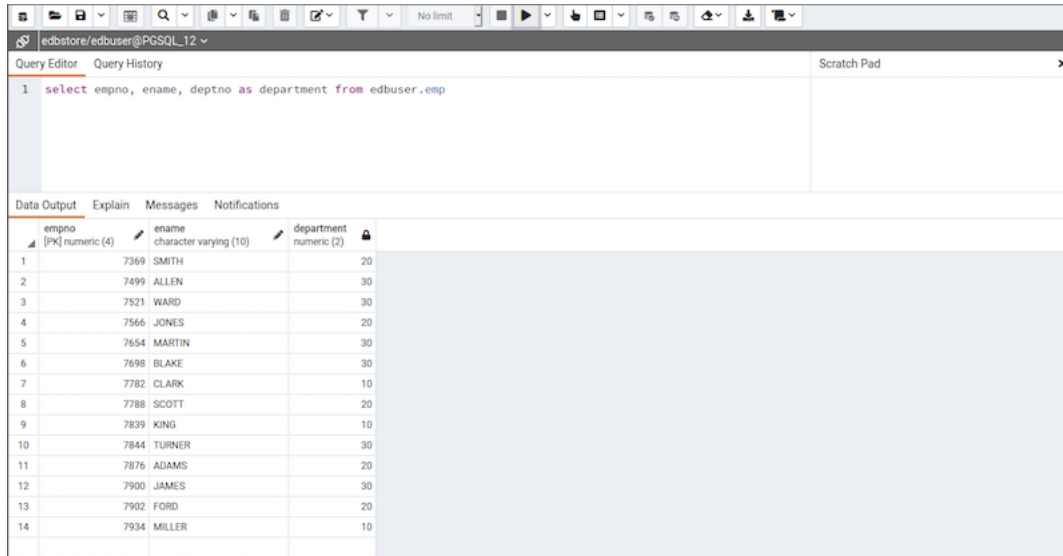


Fig. 8: Query Tool - Editable and Read-only columns

An updatable result set is similar to the Data Grid in View/Edit Data mode, and can be modified in the same way. If Auto-commit is off, data changes are made as part of the ongoing transaction; if no transaction is ongoing a new one is initiated. The data changes are not committed to the database unless the transaction is committed.

If any errors occur during saving (for example, trying to save a NULL into a column with a NOT NULL constraint) the data changes are rolled back to an automatically created SAVEPOINT to ensure any previously executed queries in the ongoing transaction are not rolled back.

All rowsets from previous queries or commands that are displayed in the Data Output panel will be discarded when you invoke another query; open another query tool browser tab to keep your previous results available.

1.2.2 Explain tab

To generate the Explain or Explain Analyze plan of a query, click on Explain or Explain Analyze button in the toolbar.

More options related to Explain and Explain Analyze can be selected from the drop down on the right side of Explain Analyze button in the toolbar.

Please note that PEM generates the Explain [Analyze] plan in JSON format.

On successful generation of Explain plan, it will create three tabs/panels under the Explain panel.

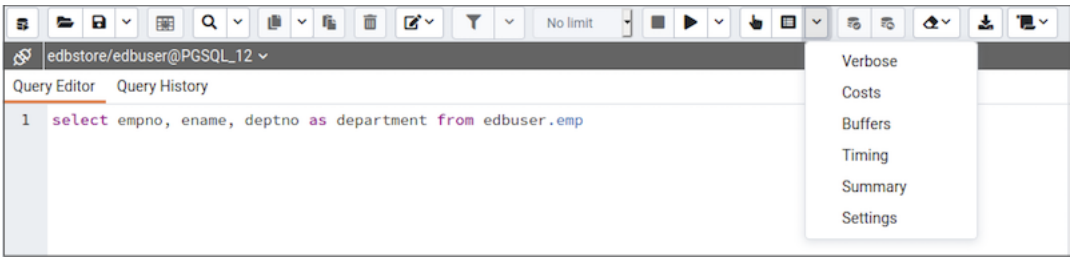


Fig. 9: Query Tool - Toolbar Explain button

1.2.3 Graphical tab

Hover over an icon on the Graphical tab to review information about that item; a popup window will display information about the selected object. For information on JIT statistics, triggers and a summary, hover over the icon on top-right corner; a similar popup window will be displayed when appropriate.

Please note that EXPLAIN VERBOSE cannot be displayed graphically.

Use the download button on top left corner of the Explain canvas to download the plan as an SVG file. Please note that Download as SVG feature is not supported on Internet Explorer.

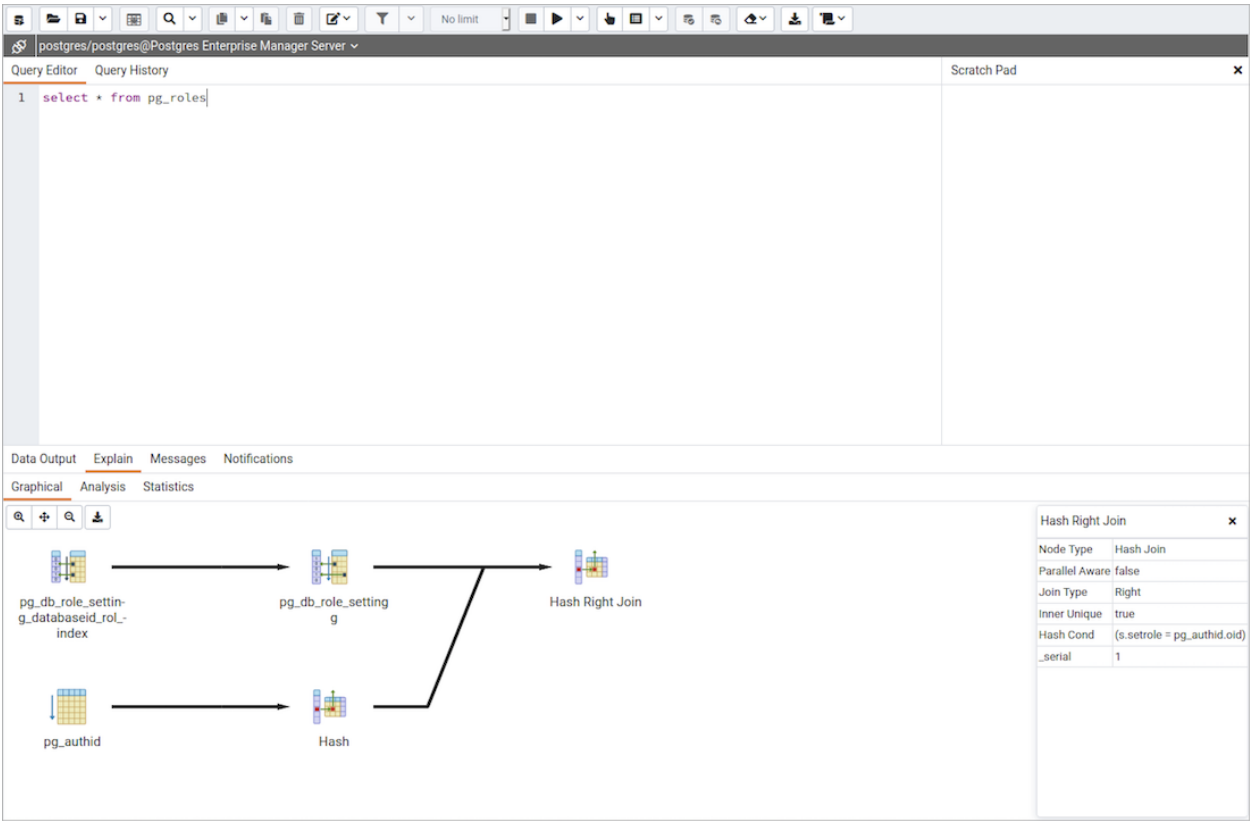


Fig. 10: Query Tool - Explain tab - Graphical plan tab

The query plan that accompanies the Explain analyze is available on the Data Output tab.

1.2.4 Analysis tab

The Analysis tab shows the plan details in table format, it generates a format similar to the format available at explain.depesz.com. Each row of the table represents the data for a Explain Plan Node. The output may contain the node information, exclusive timing, inclusive timing, actual vs. planned rows, actual rows, planned rows, or loops. When you select a row, the child rows of that selected row are marked with an orange dot.

If the percentage of the exclusive/inclusive timings of the total query time is:

Greater than 90 → Red

Greater than 50 → Orange (between red and yellow)

Greater than 10 → Yellow

If the planner has misestimated the number of rows (actual vs planned) by:

10 times → Yellow color

100 times → Orange (between Red and Yellow) color

1000 times → Red color

#	Node	Timings		Rows	
		Exclusive	Inclusive	Actual	Loops
1.	→ Unique (actual=56.576..58.105 rows=3510 loops=1)	1.203 ms	58.105 ms	3510	1
2.	→ Sort (actual=56.574..56.902 rows=5340 loops=1)	9.964 ms	56.902 ms	5340	1
3.	→ Nested Loop Left Join (actual=13.766..46.939 rows=5340 loops=1)	5.186 ms	46.939 ms	5340	1
4.	→ Hash Inner Join (actual=13.751..41.754 rows=5340 loops=1) Hash Cond: (dep.refclassid = pg.class.oid)	1.714 ms	41.754 ms	5340	1
5.	→ Hash Left Join (actual=13.599..39.904 rows=7787 loops=1) Hash Cond: (pr.prortype = prtyp.oid)	2.009 ms	39.904 ms	7787	1
6.	→ Hash Left Join (actual=13.476..37.783 rows=7787 loops=1) Hash Cond: (dep.refobjid = fdw.oid)	1.703 ms	37.783 ms	7787	1
7.	→ Hash Left Join (actual=13.451..36.079 rows=7787 loops=1) Hash Cond: (dep.refobjid = fs.oid)	1.733 ms	36.079 ms	7787	1
8.	→ Hash Left Join (actual=13.44..34.345 rows=7787 loop... Hash Cond: ((att.attrelid = ad.adrelid) AND (att.attnum = ad.adnum))	1.84 ms	34.345 ms	7787	1
9.	→ Merge Left Join (actual=13.42..32.497 rows=778...)	1.537 ms	32.497 ms	7787	1

Fig. 11: Query Tool - Explain tab - Analysis tab

1.2.5 Statistics tab

The Statistics tab displays information in two tables:

- Statistics per Node Type tells you how many times each node type was referenced.
- Statistics per Table tells you how many times each table was referenced by the query.

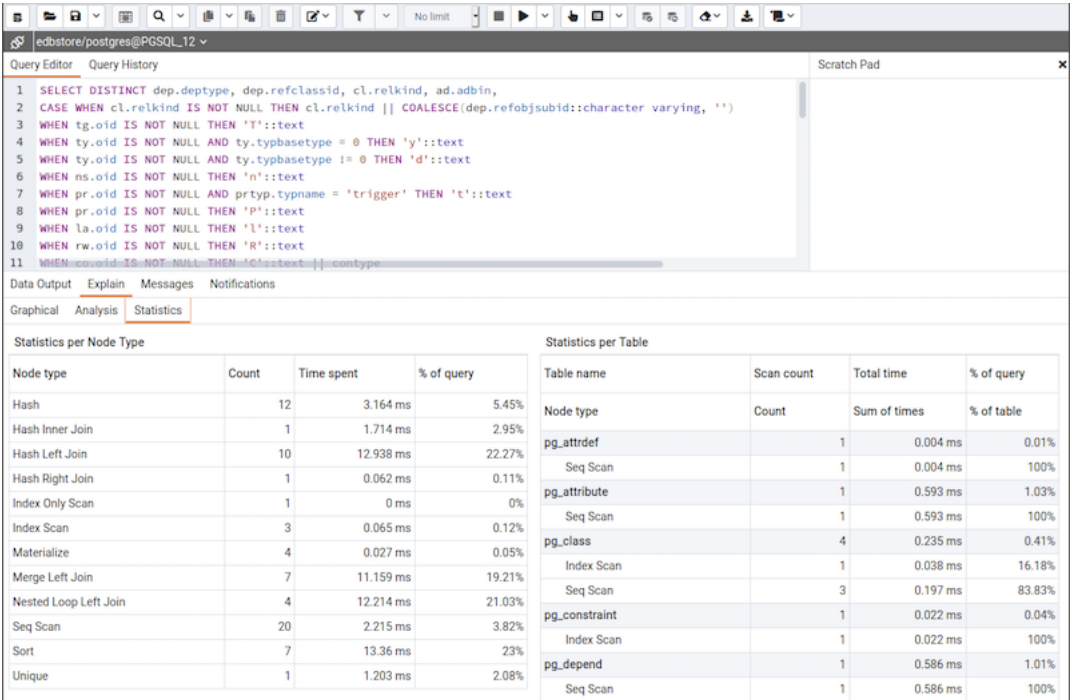


Fig. 12: Query Tool - Explain plan tab - Statistics tab

1.2.6 Messages tab

Use the Messages tab to view information about the most recently executed query:

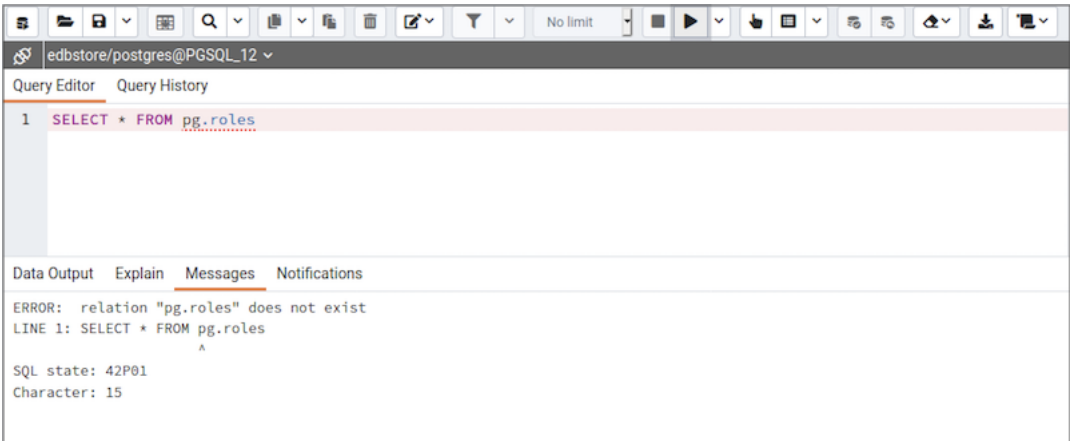


Fig. 13: Query Tool - Output error

If the server returns an error, the error message will be displayed on the Messages tab, and the syntax that caused the error will be underlined in the SQL editor. If a query succeeds, the Messages tab displays how long the query took to complete and how many rows were retrieved:

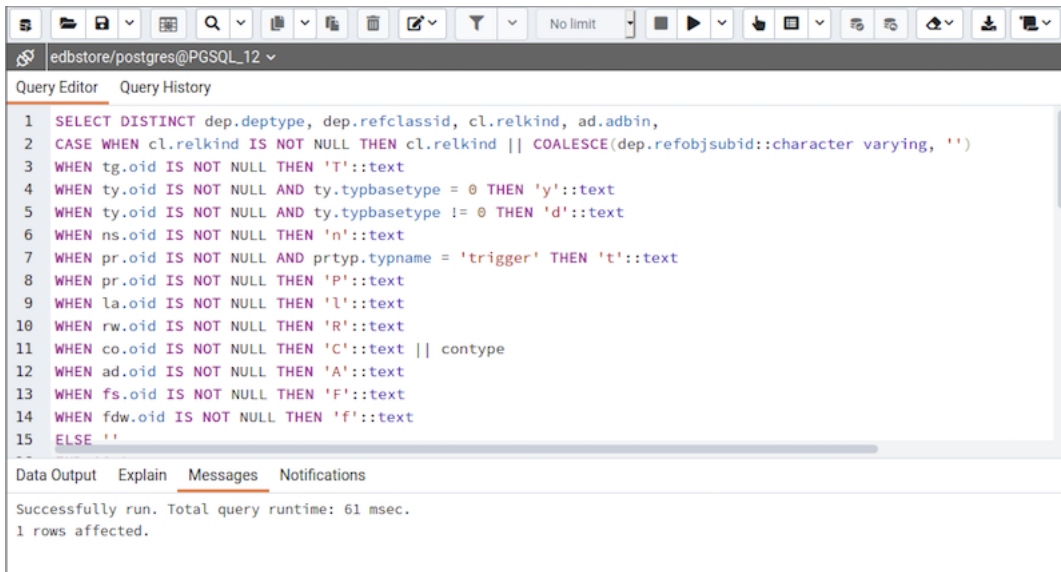


Fig. 14: Query Tool - Messages tab

1.2.7 Notifications tab

Use the Notifications tab to view the notifications using PostgreSQL Listen/Notify feature. For more details, see PostgreSQL documentation .

Example:

1. Execute LISTEN "foo" in first Query Tool session.

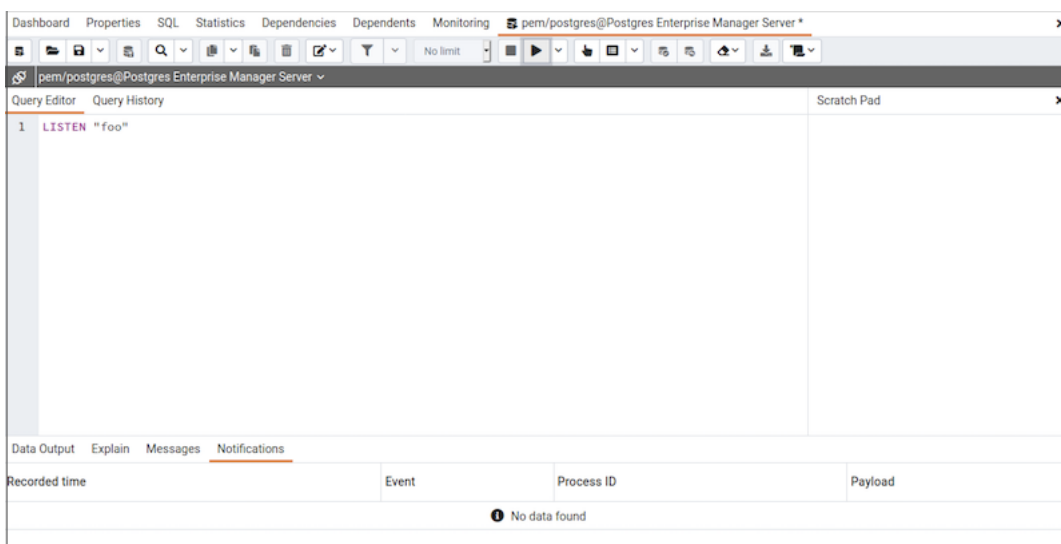


Fig. 15: Query Tool - notifications listen

- 2. In the another Query Tool session, execute Notify command or pg_notify function to send the notification of the event together with the payload.

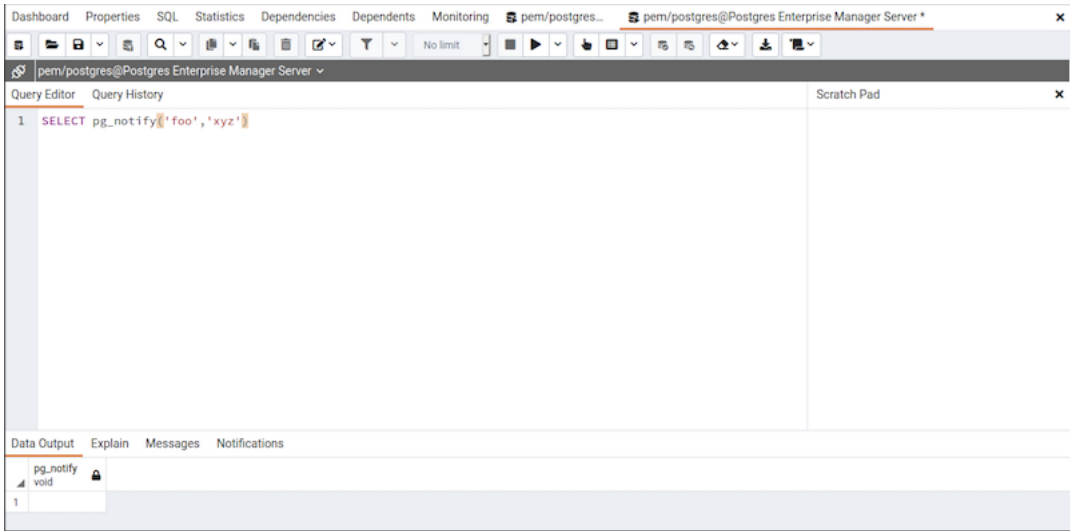


Fig. 16: Query Tool - notifications notify

- 3. You can observe the Notification tab in the first Query Tool session where it shows the Recorded time, Event, Process ID, and the Payload of the particular channel.

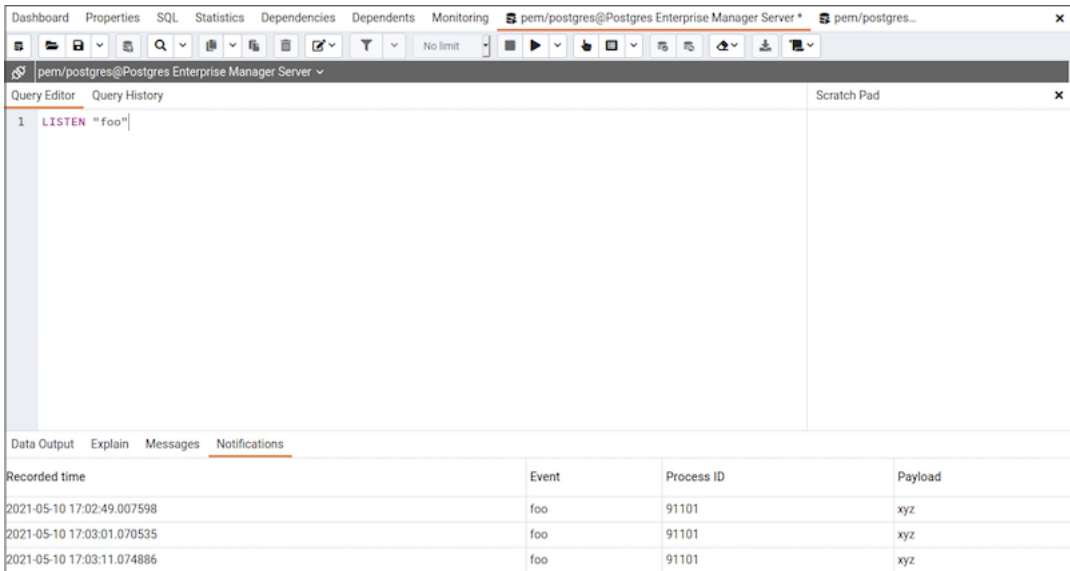


Fig. 17: Query Tool - Output Notifications panel

1.3 Query History panel

Use the Query History tab to review activity for the current session:

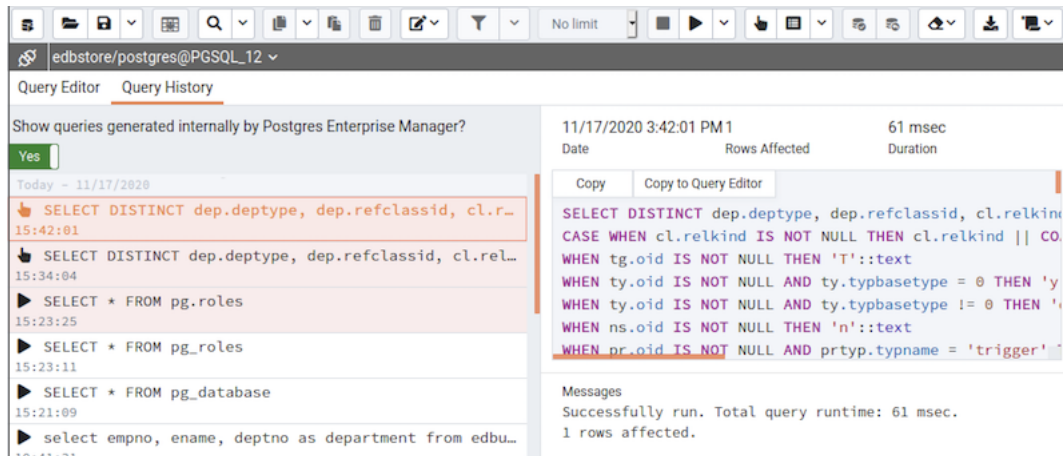


Fig. 18: Query Tool - Query History tab

The Query History tab displays information about recent commands:

- The date and time that a query was invoked.
- The text of the query.
- The number of rows returned by the query.
- The amount of time it took the server to process the query and return a result set.
- Messages returned by the server (not noted on the Messages tab).
- The source of the query (indicated by icons corresponding to the toolbar).

You can show or hide the queries generated internally by pgAdmin (during View/Edit Data or Save Data operations).

To erase the content of the Query History tab, select Clear history from the Clear drop-down menu.

Query history is maintained across sessions for each database on a per-user basis when running in Query Tool mode. In View/Edit Data mode, history is not retained. By default, the last 20 queries are stored for each database. This can be adjusted in `config_local.py` by overriding the `MAX_QUERY_HIST_STORED` value.

1.4 Connection status

Use the Connection status feature to view the current connection and transaction status by clicking on the status icon in query tool:

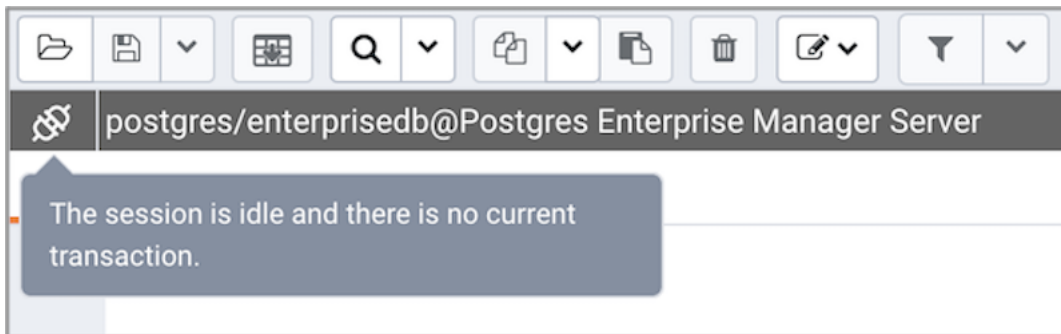


Fig. 19: Query Tool - Connection Status button

1.5 Macros

Query Tool Macros enable you to execute pre-defined SQL queries with a single key press. Pre-defined queries can contain the placeholder *SELECTION*. Upon macro execution, the placeholder will be replaced with the currently selected text in the Query Editor pane of the Query Tool.

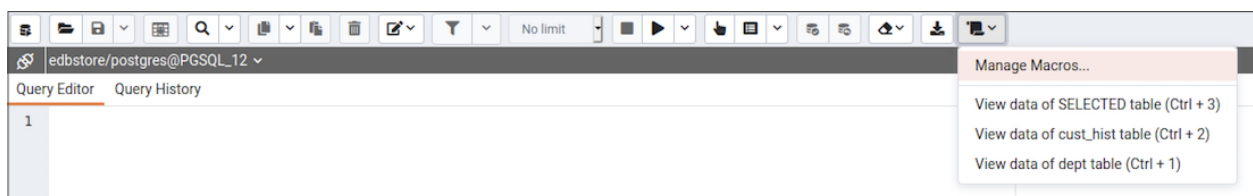


Fig. 20: Query Tool - Connection Status button

To create a macro, select the *Manage Macros* option from the *Macros* menu on the *Query Tool*. Select the key you wish to use, enter the name of the macro, and the query, optionally including the selection placeholder, and then click the *Save* button to store the macro.

To clear a macro, select the macro on the *Manage Macros* dialogue, and then click the *Clear* button.

The server will prompt you for confirmation to clear the macro.

To clear all macros, click on the *Clear* button on left side of the key. The server will prompt you for confirmation to clear all the rows.

To execute a macro, simply select the appropriate shortcut keys, or select it from the *Macros* menu.

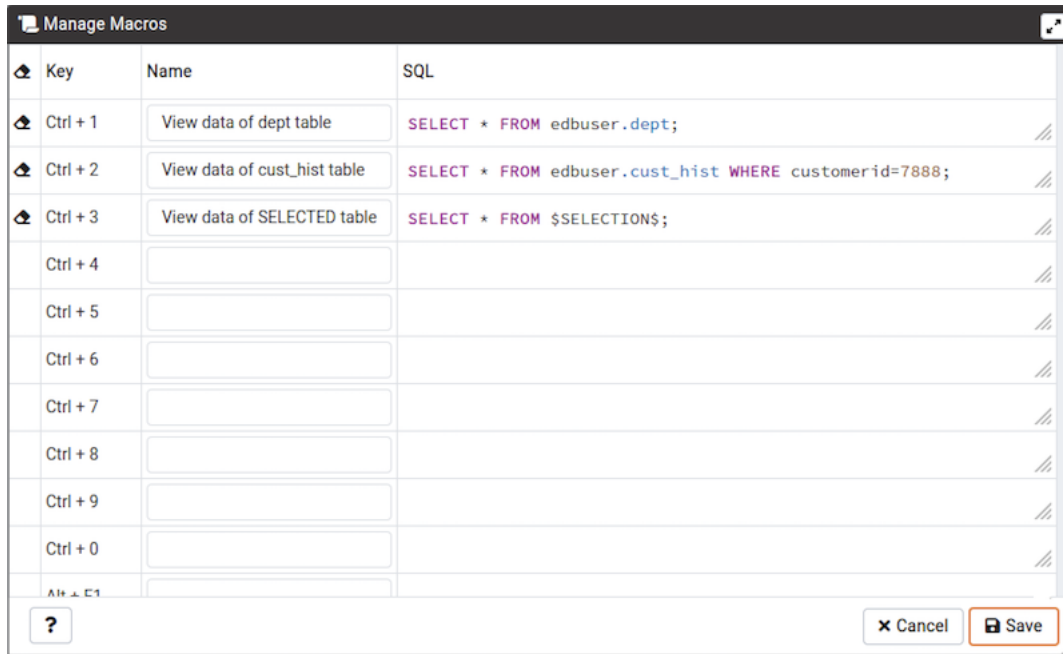


Fig. 21: Query Tool - Connection Status button

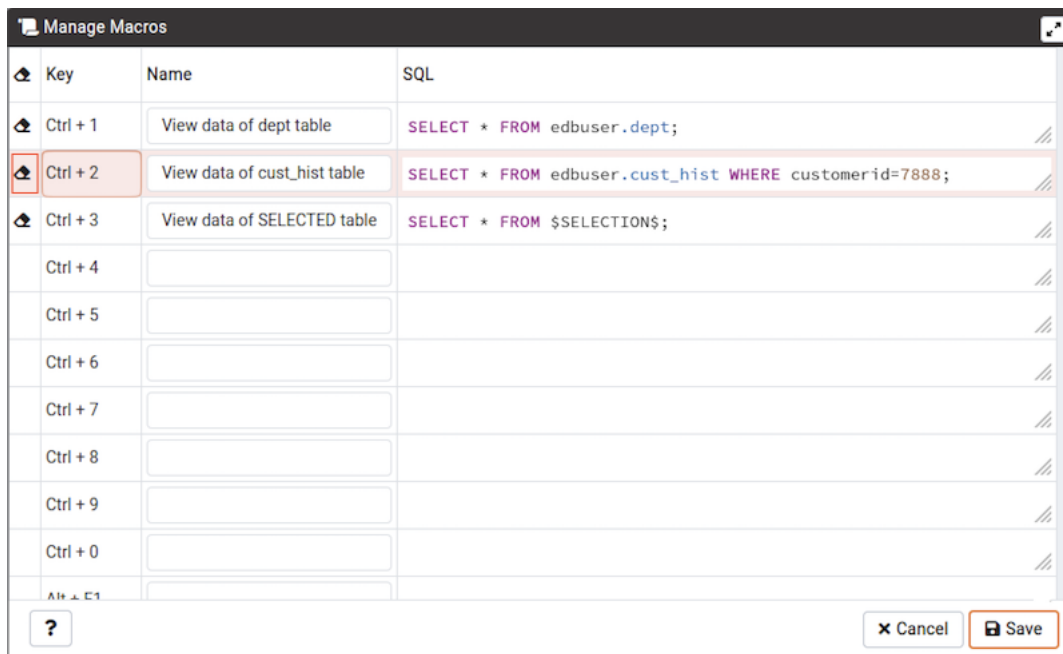


Fig. 22: Query Tool - Connection Status button

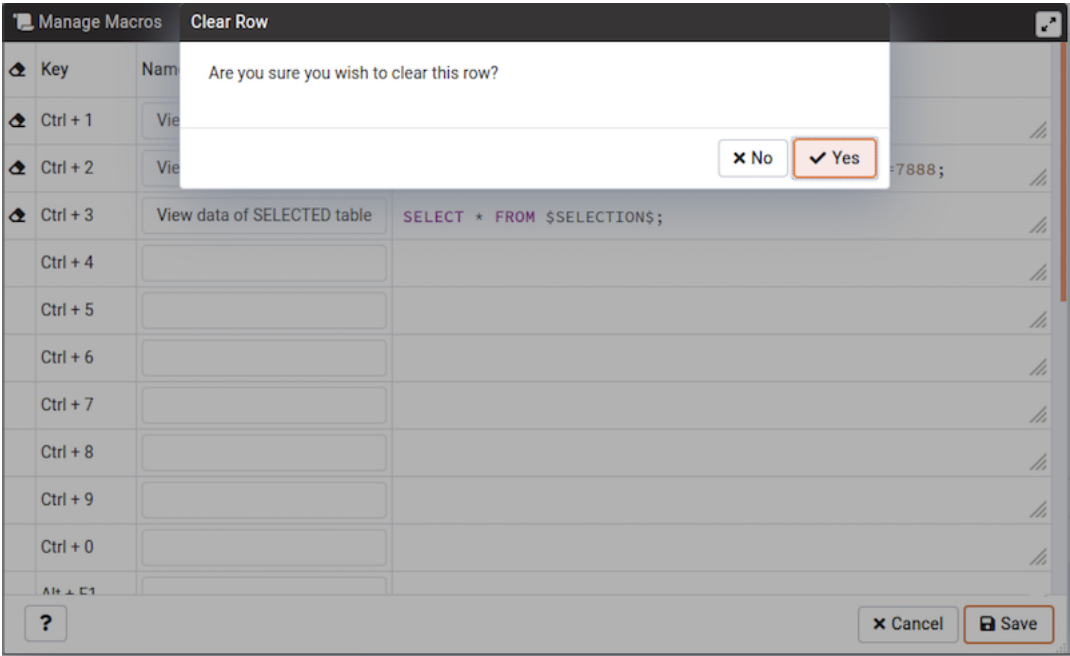


Fig. 23: Query Tool - Connection Status button

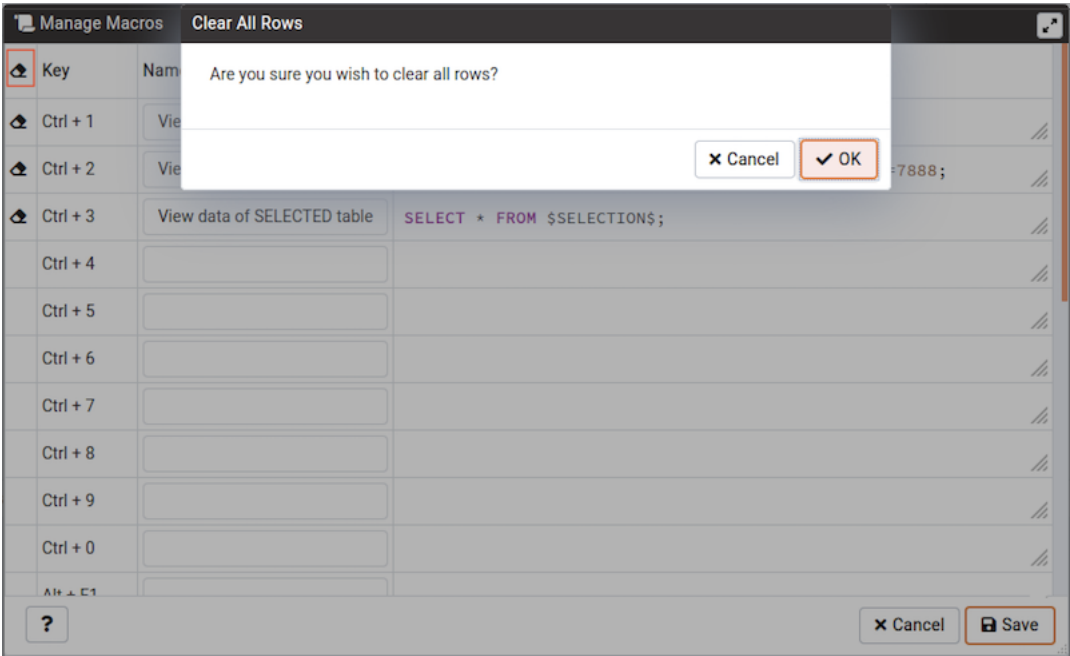


Fig. 24: Query Tool - Connection Status button

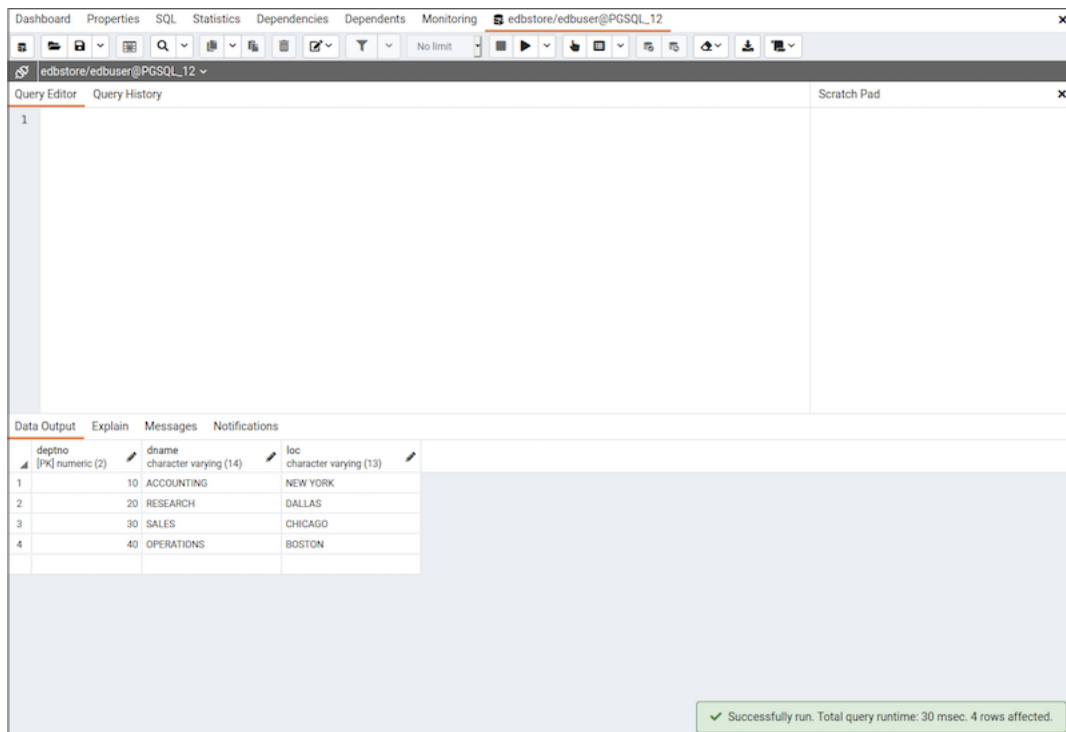


Fig. 25: Query Tool - Connection Status button

THE PEM SCHEMA DIFF TOOL

SchemaDiff is a feature that allows you to compare schema objects between two database schemas. Use the **Tools** menu to access Schema Diff.

The Schema Diff feature allows you to:

- Compare and synchronize the database schemas (from source to target).
- Visualize the differences between database schemas.
- List the differences in SQL statement for target schema objects.
- Generate synchronization scripts.

Note: The source and target databases must be of the same major version.

Click on **Schema Diff** under the **Tools** menu to open a selection panel. Choose the source and target servers, databases, and schemas that will be compared. After selecting the objects, click on the **Compare** button.

You can open multiple copies of **Schema Diff** in individual tabs simultaneously. To close a tab, click the **X** in the upper-right hand corner of the tab bar.

Use the **Preferences** dialog to specify if **Schema Diff** should open in a new browser tab. Set **Open in new browser tab** option to **true**.

The **Schema Diff** panel is divided into two panels; an **Object Comparison** panel and a **DDL Comparison** panel.

2.1 Schema Diff object comparison panel

In the object comparison panel, you can select the source and target servers of the same major version, databases, and schemas to be compared. You can select any server listed under the browser tree whether it is connected or disconnected. If you select a server that is not connected then it will prompt you for the password before using the server.

Next, select the databases that will be compared. The databases can be the same or different (and within the same server or from different servers).

Lastly, select the source and target schemas which will be compared.

After you select servers, databases, and schemas, click on the **Compare** button to obtain the **Comparison Result**.

Use the drop-down lists of **Functions**, **Materialized Views**, **Tables**, **Trigger Functions**, **Procedures**, and **Views** to view the DDL statements of all the schema objects.

In the upper-right hand corner of the object comparison panel is a **Filter** option that you can use to filter the schema objects based on the following comparison criteria:

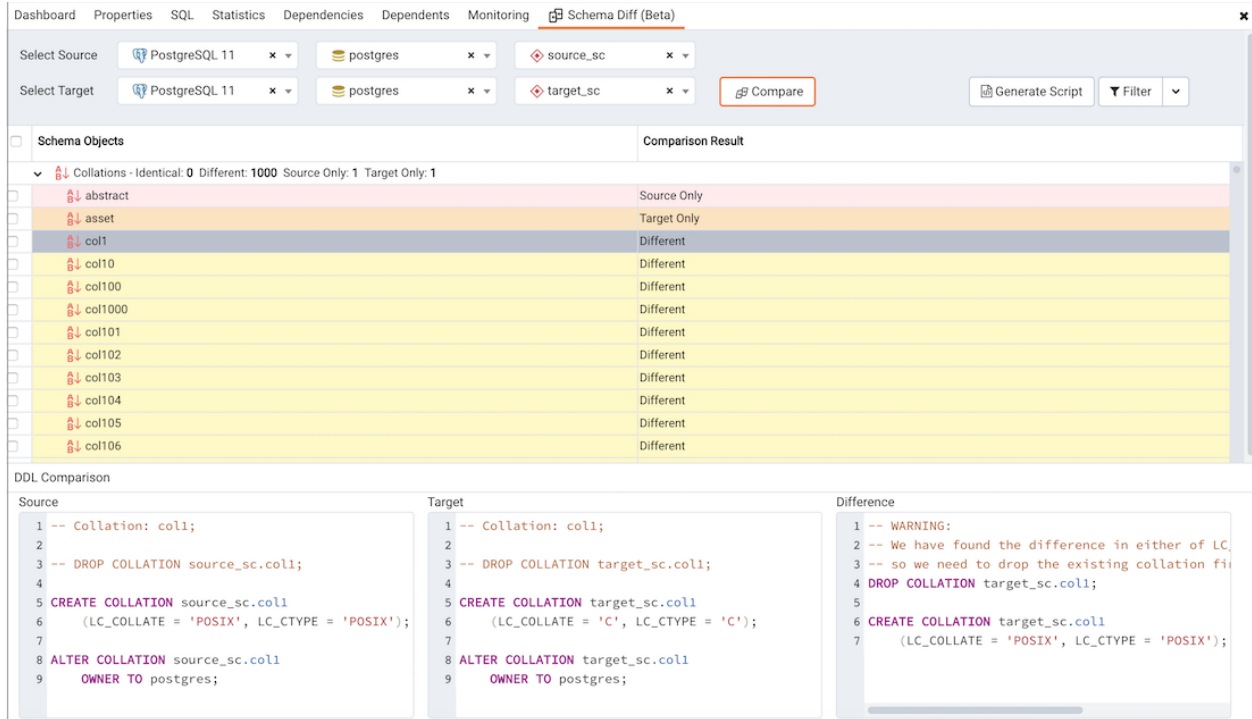


Fig. 1: Schema Diff dialog



Fig. 2: Schema Diff dialog - Compare button

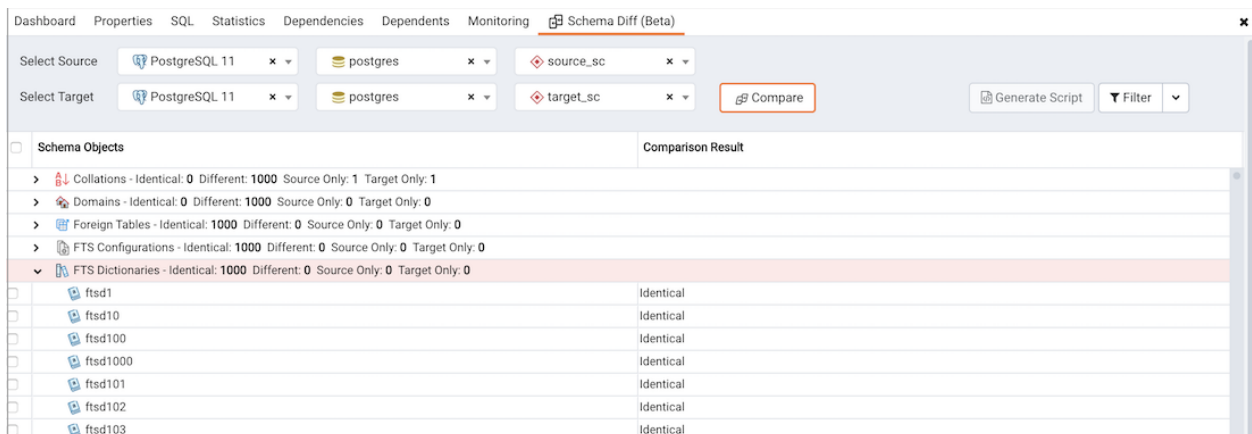


Fig. 3: Schema Diff dialog - Comparison Results

- **Identical** – If the object is found in both schemas with the same SQL statement, then the comparison result is identical.
- **Different** – If the object is found in both schemas but have different SQL statements, then the comparison result is different.
- **Source Only** – If the object is found in source schema only and not in target schema, then the comparison result is source only.
- **Target Only** – If the object is found in target schema only and not in source schema, then the comparison result is target only.

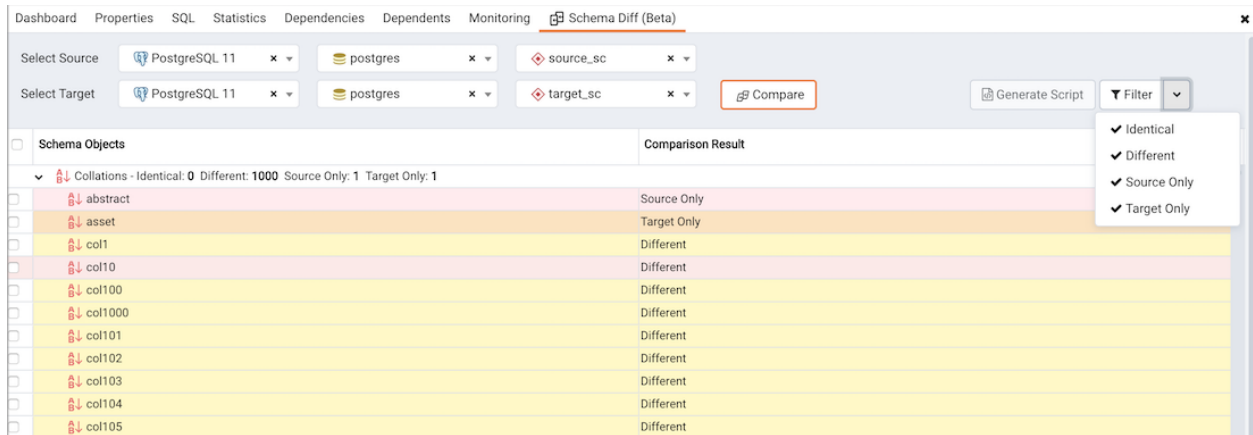


Fig. 4: Schema Diff dialog - Filter option

Click on any of the schema objects in the object comparison panel to display the DDL statements for that object in the DDL Comparison panel.

2.2 Schema Diff DDL comparison panel

The DDL Comparison panel displays three columns:

- The first column displays the DDL statement of the object from the source schema.
- The second column displays the DDL statement of the object from the target schema.
- The third column displays the difference in the SQL statement of the target schema object.

You can review the DDL statements of all the schema objects to check for the differences in the SQL statements.

You can also use the Schema Diff tool to generate a SQL script of the differences found in the target schema object based on the SQL statement of the source schema object. To generate the script, select the checkboxes of the schema objects in the object comparison panel and then click on the **Generate Script** button in the upper-right hand corner of the object comparison panel.

Select the schema objects and click on the **Generate Script** button to open the **Query Tool** in a new tab, with the difference in the SQL statement displayed in the **Query Editor**.

If you have clicked on the schema object to check the difference generated in the DDL Comparison Panel, and you have not selected the checkbox of the schema object, PEM will open the **Query Tool** in a new tab, with the differences in the SQL statements displayed in the **Query Editor**.

You can also use the **Copy** button to copy the difference generated in the DDL Comparison panel.

Apply the SQL Statement in the target schema to synchronize the schemas.

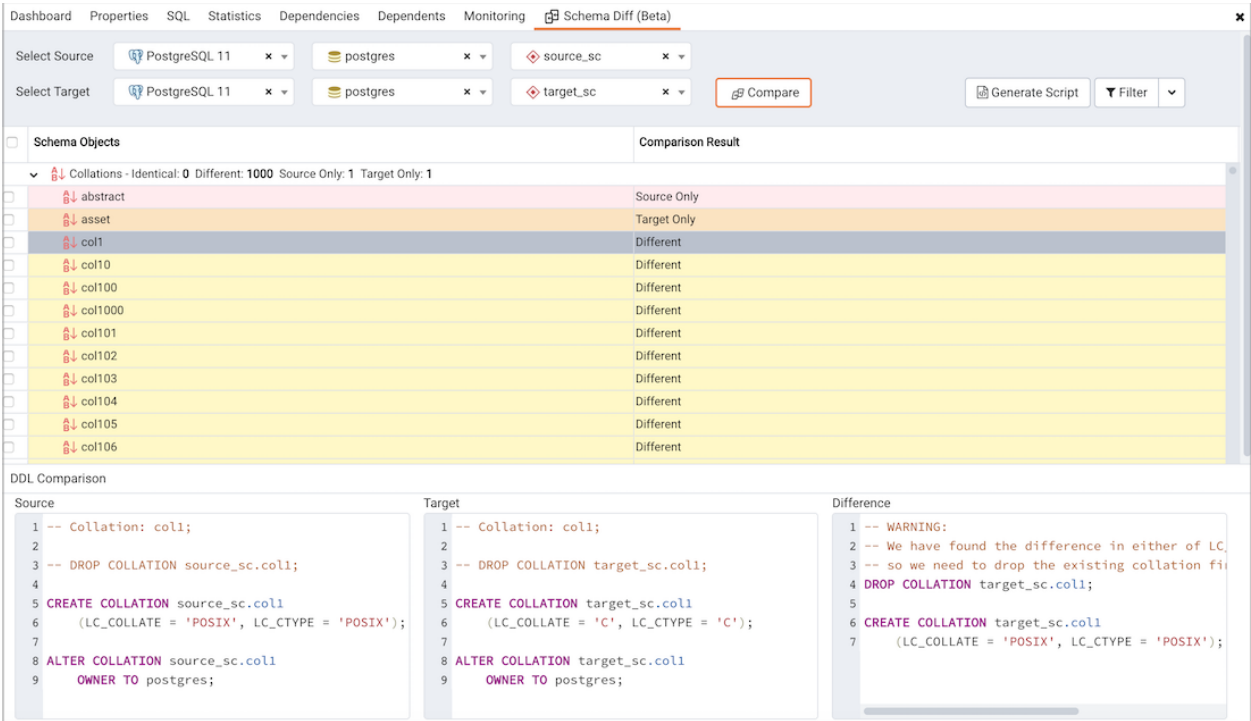


Fig. 5: Schema Diff dialog - DDL Comparison panel

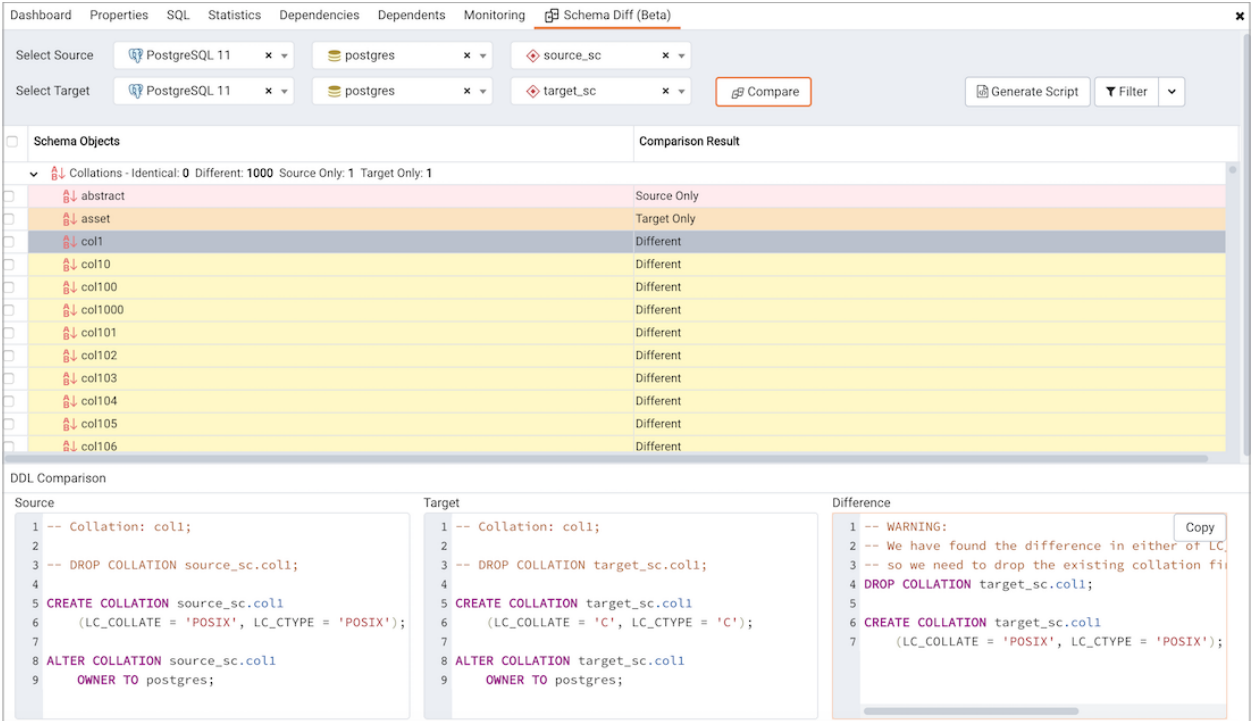


Fig. 6: Schema Diff dialog - Generate Script button

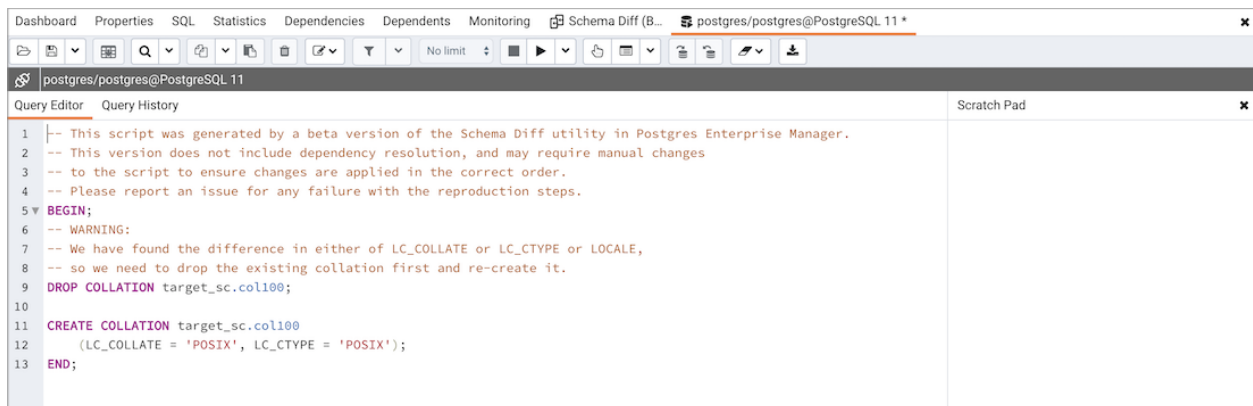


Fig. 7: Schema Diff dialog - Generate Script - Query Editor

THE ERD TOOL

The **Entity-RelationshipDiagram(ERD)** tool is a database design tool that provides a graphical representation of database tables, columns, and inter-relationships. ERD can give sufficient information for the database administrator to follow when developing and maintaining the database. You can access the ERD Tool via the ERD Tool menu option on the Tools menu. The ERD Tool allows you to:

- Design and visualize the database tables and their relationships.
- Add notes to the diagram.
- Auto-align the tables and links for cleaner visualization.
- Save the diagram and open it later to continue working on it.
- Generate ready to run SQL from the database design.
- Generate the database diagram for an existing database.

You can open multiple copies of the ERD tool in individual tabs simultaneously. To close a copy of the ERD tool, click the X in the upper-right hand corner of the tab bar.

3.1 Toolbar

The **ERDTool** toolbar uses context-sensitive icons that provide shortcuts to frequently performed tasks. The option is enabled for the highlighted icon and is disabled for the grayed-out icon.

3.2 File options

Icon	Behavior	Shortcut
<i>Open File</i>	Click the <i>Open File</i> icon to load a previously saved diagram.	Ctrl + O
<i>Save</i>	Click the <i>Save</i> icon to perform a quick-save of a previously saved diagram, or to save the diagram to a file.	Ctrl + S
<i>Save as</i>	Click the <i>Save As</i> to open a new browser dialog and specify a new location to save the diagram.	Ctrl + Shift + S

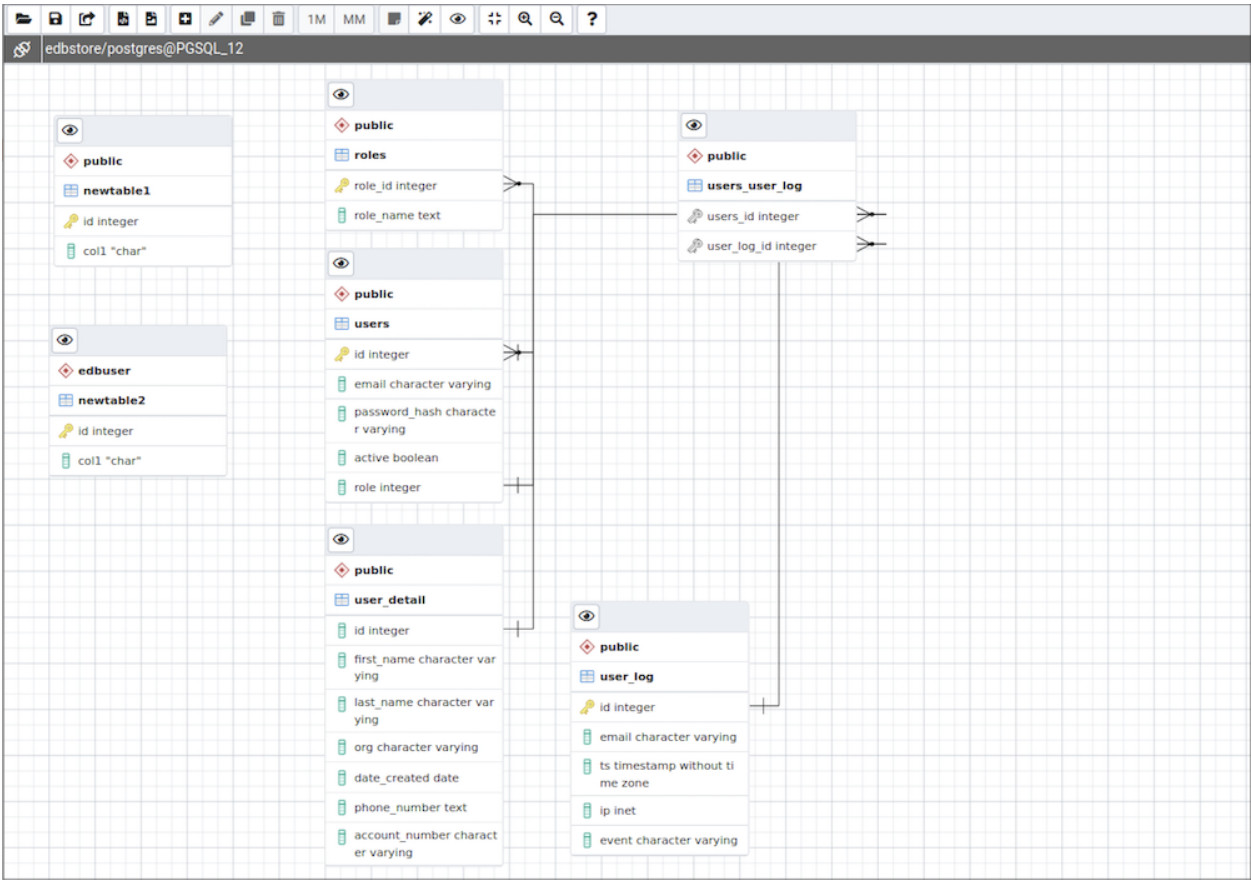


Fig. 1: ERD Tool



Fig. 2: ERD Tool - Toolbar

3.3 Export options

Icon	Behavior	Shortcut
<i>Generate SQL</i>	Click the <i>Generate SQL</i> icon to generate the DDL SQL for the diagram and open a query tool with the generated SQL ready for execution.	Option + Ctrl + S
<i>Download image</i>	Click the <i>Download image</i> icon to save the ERD diagram in a image format.	Option + Ctrl + I

3.4 Editing options

Icon	Behavior	Shortcut
<i>Add table</i>	Click this button to add a new table to the diagram. On clicking, this will open a table dialog where you can put the table details.	Option/Alt + Ctrl + A
<i>Edit table</i>	Click this button to edit a table on the diagram. On clicking, this will open a table dialog where you can change table details. This will enable when a table is selected.	Option/Alt + Ctrl + E
<i>Clone table</i>	Click this button to clone the complete table structure, name it with a auto generated name and put it in the diagram.	Option/Alt + Ctrl + C
<i>Drop table/link</i>	You can drop a table or link using this button. You need to select a table or link and click on this button to drop it.	Option/Alt + Ctrl + D

3.5 Table relationship options

Icon	Behavior	Shortcut
<i>1M</i>	Click this button to open a one-to-many relationship dialog to add a relationship between the two tables. The selected table becomes the referencing table and will have the <i>many</i> endpoint of the link.	Option/Alt + Ctrl + O
<i>MM</i>	Click this button to open a many-to-many relationship dialog to add a relationship between the two tables. This option will create a new table based on the selected columns for the two relating tables and link them.	Option/Alt + Ctrl + M

3.6 Utility Options

Icon	Behavior	Shortcut
<i>Add/Edit note</i>	Click this button to make notes on tables nodes while designing the database.	Option/Alt + Ctrl + N
<i>Auto align</i>	Click this button to auto align all tables and links to make it look more cleaner.	Option/Alt + Ctrl + L
<i>Show details</i>	Click this button to toggle the column details visibility. It allows you to show few or more column details.	Option/Alt + Shift + D

3.7 Zoom options

Icon	Behavior	Shortcut
<i>Zoom to fit</i>	Click this button to zoom in/out automatically and fit all the tables to the view.	Option/Alt + Shift + F
<i>Zoom in</i>	Click this button to zoom in the diagram.	Option/Alt + Shift + “+”
<i>Zoom out</i>	Click this button to zoom out the diagram.	Option/Alt + Shift + “-”

3.8 Table dialog

The screenshot shows a 'New table' dialog box. It has a title bar with a maximize button. Below the title bar are two tabs: 'General' and 'Columns'. The 'General' tab is active. It contains three input fields: 'Name' with the text 'users1', 'Schema' with a dropdown menu showing 'public', and 'Comment' with the text 'users information table'. At the bottom right, there are two buttons: 'Cancel' and 'OK'.

Fig. 3: ERD Tool - Table Dialog

The table dialog allows you to:

- Change the table structure details.
- It can be used edit an existing table or add a new one.
- Refer [Table dialog](#) for information on different fields.

3.9 Table node

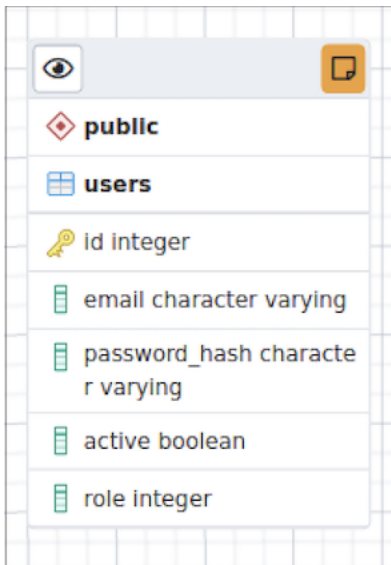


Fig. 4: ERD Tool - Table Node

The table node shows table details in a graphical representation:

- The top bar has a **details toggle** button that is used to toggle column details visibility. There is also a **note** button that is visible only if there is some note added. you can click on this button to quickly change the note.
- The first row shows the schema name of the table. Eg. **public** in above image.
- The second row shows the table name. Eg. **users** in above image.
- All other rows below the table name are the columns of the table along with data type. If the column is a primary key then it will have lock key icon eg. **id** is the primary key in above image. Otherwise, it will have column icon.
- You can click on the node and drag to move on the canvas.
- Upon double click on the table node or by clicking the edit button from the toolbar, the table dialog opens where you can change the table details. Refer [Table dialog](#) for information on different fields.

3.10 One to many link dialog

The one to many link dialog allows you to:

- Add a foreign key relationship between two tables.
- **Local Table** is the table that references a table and has the **many** end point.
- **Local Column** is the column that references.
- **Referenced Table** is the table that is being referred and has the **one** end point.
- **Referenced Column** is the column that is being referred.

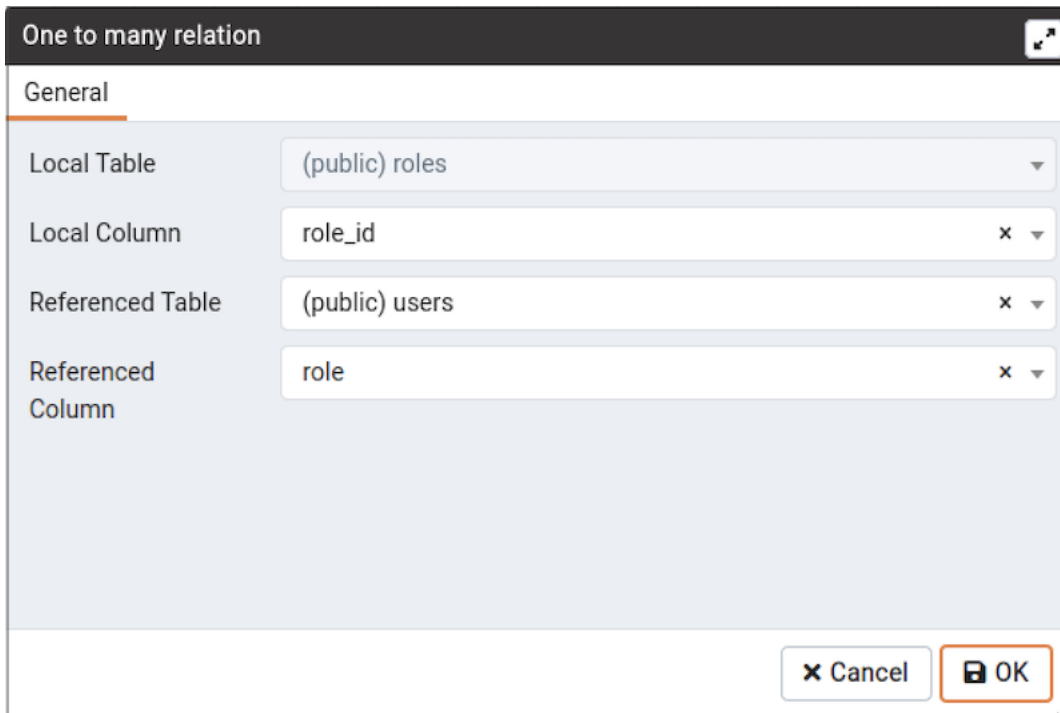


Fig. 5: ERD Tool - One to Many Dialog

3.11 Many to many link dialog


The many to many link dialog allows you to:

- Add a many to many relationship between two tables.
- It creates a relationship tables having columns derived from the two tables and link them to the tables.
- **Left Table** is the first table that is to be linked. It will receive the one endpoint of the link with the new relation table.
- **Left Column** is the column of the first table, that will always be a primary key.
- **Right Table** is the second table that is to be linked. It will receive the one endpoint of the link with the new relation table.
- **Right Column** is the column of the second table, that will always be a primary key.

3.12 Table link

The table link shows relationship between tables:

- The single line endpoint of the link shows the column that is being referred.
- The three line endpoint of the link shows the column that refers.
- If one of the columns that is being referred or that refers is removed from the table then the link will get dropped.
- You can click on the link and drag to move on the canvas.

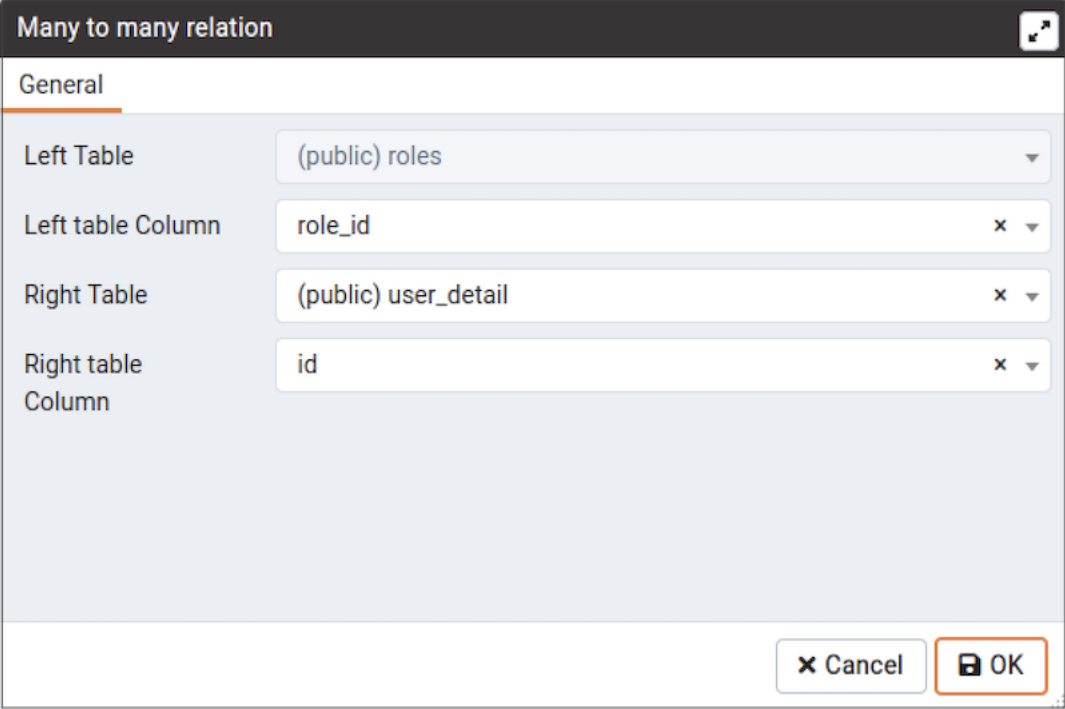

Many to many relation

General

Left Table: (public) roles

Left table Column: role_id

Right Table: (public) user_detail

Right table Column: id

Buttons: Cancel, OK

Fig. 6: ERD Tool - Many to Many Dialog

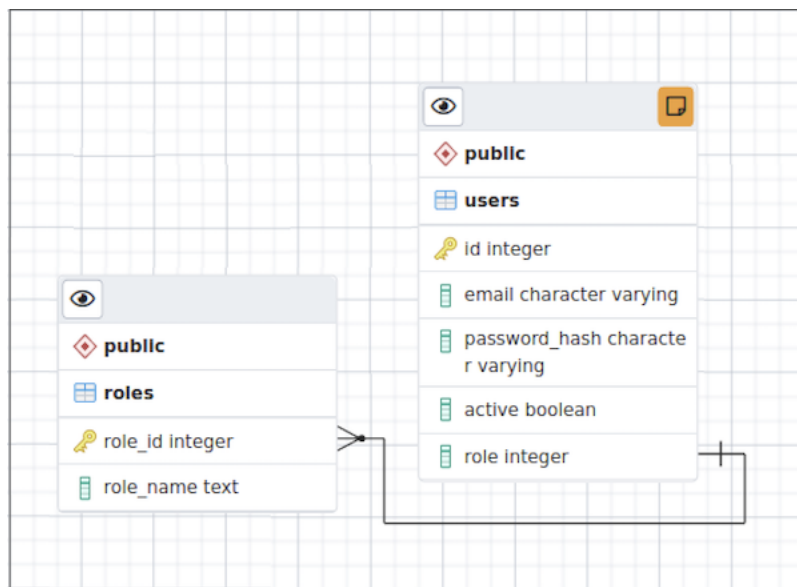


Fig. 7: ERD Tool - Table Link

3.13 Table notes

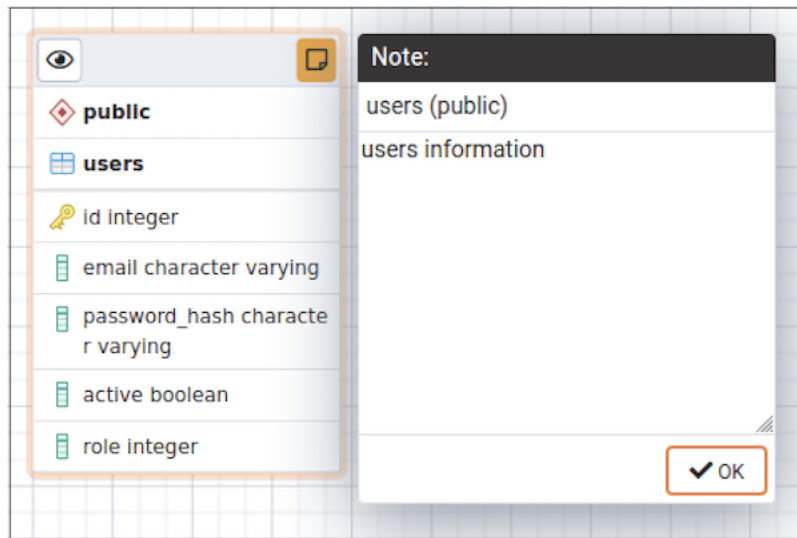


Fig. 8: ERD Tool - Table Notes

- You can use the notes popup to mark some notes while designing the database.
- You open the pop-up using the toolbar note button.
- If some note is added to a table then it will have notes button on the table node. You can click on the button to check/update notes.

PERFORMANCE MONITORING AND MANAGEMENT

PEM contains built-in functionality that implements enterprise-wide performance monitoring of all managed servers. While you can customize many aspects of the various performance monitoring aspects of PEM, you can also elect to accept the recommended defaults that come out-of-the-box with the product.

The top-level dashboard is the `Global Overview`. The Global Overview presents a status summary of all the servers and agents that are being monitored by the PEM server, a list of the monitored servers, and the state of any currently triggered alerts.

4.1 Using dashboards to view performance information

PEM displays performance statistics through a number of dashboards; each dashboard contains a series of summary views that contain charts, graphs and tables that display the statistics related to the selected object.

The PEM client displays the `Global Overview` dashboard when it connects to the PEM server. Additional dashboards provide statistical information about monitored objects. These include the:

AlertsDashboard

The Alerts dashboard displays the currently triggered alerts. If opened from the Global Overview, the dashboard displays the current alerts for all monitored nodes on the system; if opened from a node within a server, the report will reflect alerts related to that node, and all monitored objects that reside below that object in the tree control.

AuditLogAnalysisDashboard

For Advanced Server users, the Audit Log Analysis dashboard allows you to browse the audit logs that have been collected from instances that have audit logging and collection enabled.

BDRAdminDashboard

The BDR Admin dashboard displays the overview of information about BDR node, BDR group, and BDR worker.

BDRGroupMonitoringDashboard

The BDR Group Monitoring dashboard displays the information about BDR group Subscription and BDR group replication slots.

BDRNodeMonitoringDashboard

The BDR Node Monitoring dashboard displays the information about BDR node slots, BDR node Replication rates, and BDR conflict history summary for the selected node.

DatabaseAnalysisDashboard

The Database Analysis dashboard displays performance statistics for the selected database.

I/OAnalysisDashboard

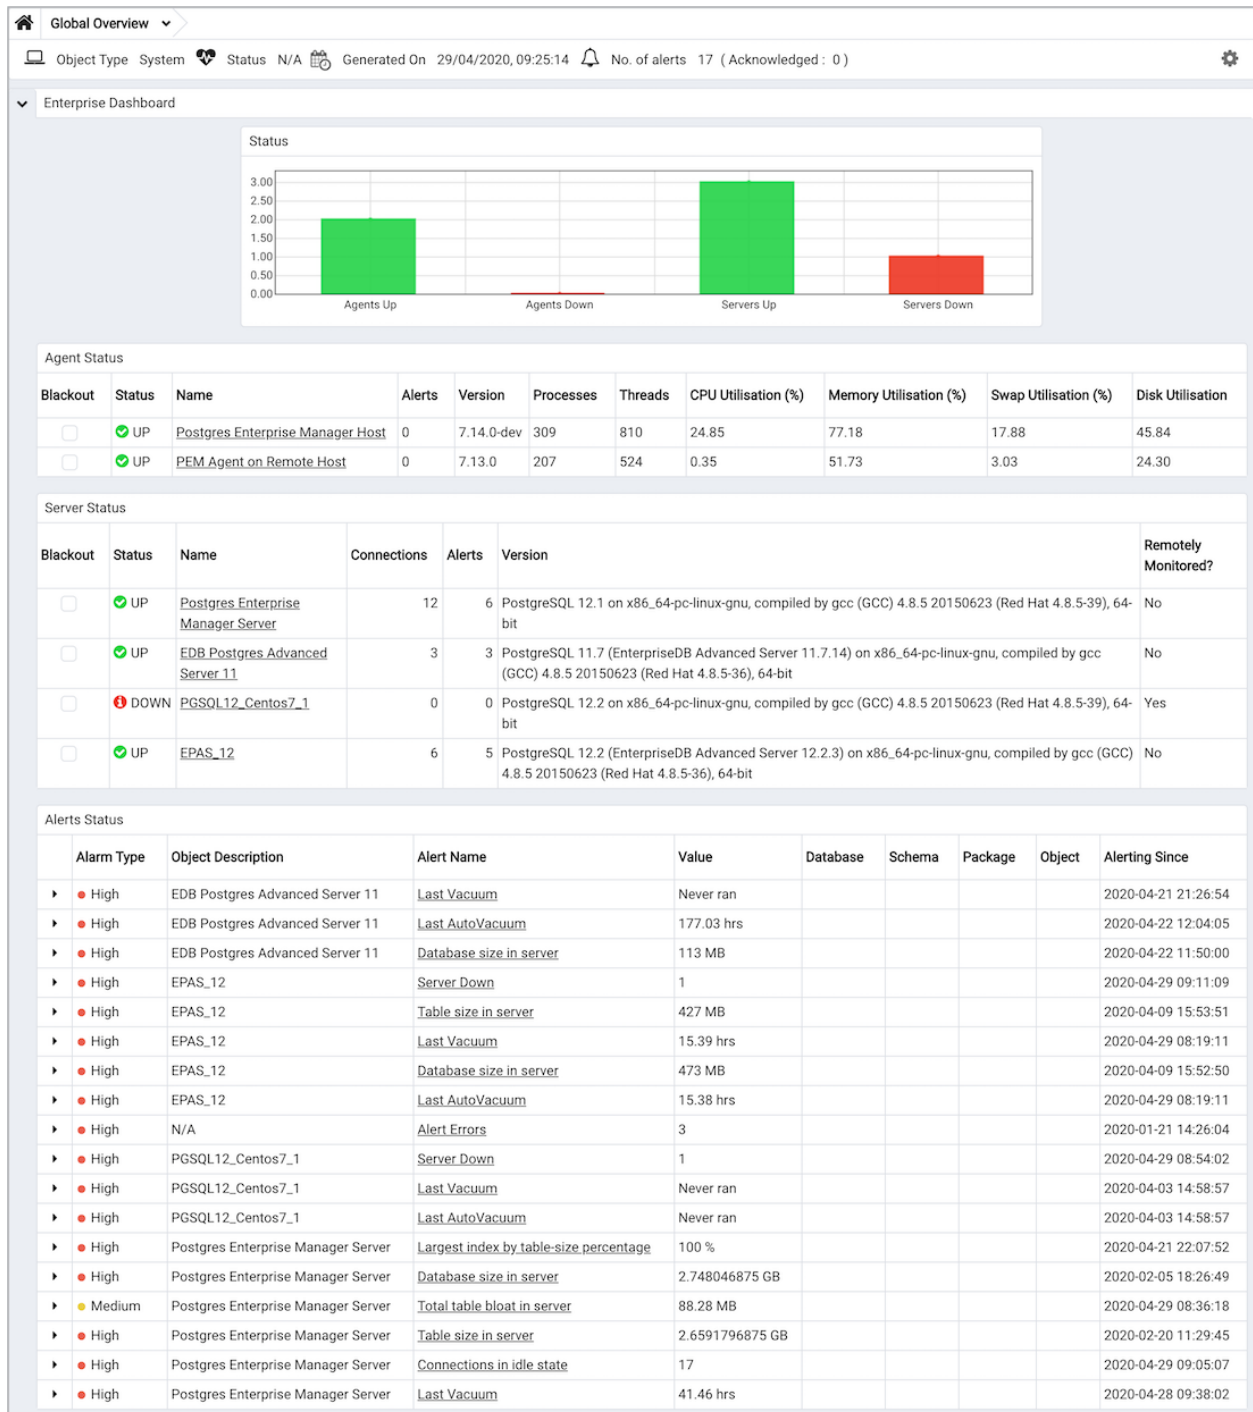


Fig. 1: The Global Overview dashboard

The I/O Analysis dashboard displays I/O activity across various areas such as object DML activity, log operations and more.

MemoryAnalysisDashboard

The Memory Analysis dashboard supplies statistics concerning various memory-related metrics for the Postgres server.

ObjectActivityAnalysisDashboard

The Object Activity Analysis dashboard provides performance details on tables/indexes of a selected database.

OperatingSystemAnalysisDashboard

The Operating System Analysis dashboard supplies information regarding the performance of the underlying machine's operating system.

ProbeLogAnalysisDashboard

The Probe Log Analysis dashboard displays any error messages returned by a PEM agent.

ServerAnalysisDashboard

The Server Analysis dashboard provides general performance information about the overall operations of a selected Postgres server.

ServerLogAnalysisDashboard

The Server Log Analysis dashboard allows you to filter and review the contents of server logs that are stored on the PEM server.

SessionActivityAnalysisDashboard

The Session Activity Analysis dashboard provides information about the session workload and lock activity for the selected server

SessionWaitsAnalysisDashboard

The Session Waits Analysis dashboard provides an overview of the current DRITA wait events for an Advanced Server session.

StorageAnalysisDashboard

The Storage Analysis dashboard displays space-related metrics for tablespaces and objects.

SystemWaitsAnalysisDashboard

The System Waits Analysis dashboard displays a graphical analysis of system wait information for an Advanced Server session.

StreamingReplicationAnalysisDashboard

The Streaming Replication Analysis dashboard displays statistical information about WAL activity for a monitored server and allows you to monitor the status of Failover Manager clusters.

There are two ways to open a dashboard; you can:

- Select an active dashboard name from the **Dashboards** menu (accessed via the **Management** menu).
- Right click on the name of a monitored object in the tree control and select the name of the dashboard you would like to review from the **Dashboards** menu.

Each dashboard is displayed on the **Monitoring** tab in the main panel of the client window. After opening a dashboard, you can navigate to other dashboards within the same tab.

Each dashboard header includes navigation menus that allow you to navigate to other dashboards; use your browsers forward and back icons to scroll through previously-viewed dashboards. Use the **Refresh** icon to update the current dashboard.

Options on the Dashboard Configuration dialog allow you to link the time lines of all of the line graphs on the dashboard. To open the Dashboard Configuration dialog, click the Settings icon displayed in the dashboard header.

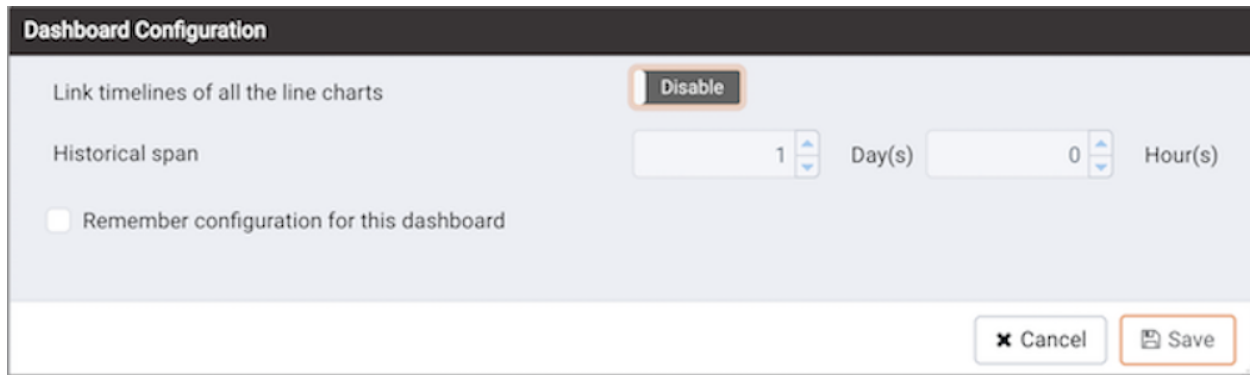


Fig. 2: The Dashboard Configuration dialog

Use fields on the Dashboard Configuration dialog to control attributes of the charts displayed on the dashboard:

- Set the Link timelines of all the line charts slider to Enable to indicate that the specified timeline should be applied to line graphs displayed on the dashboard; if set to Disable, your preferences will be preserved for later use, but will not modify the amount of data displayed.
- Use the Days selector to specify the number of days of gathered data that should be displayed on line graphs.
- Use the Hour(s) selector to specify the number of hours of gathered data that should be displayed on line graphs.
- Check the box next to Remember configuration for this dashboard to indicate that the customized time span should be applied to the current dashboard only; if left unchecked, the time span will be applied globally to line graphs on all dashboards.

Please note that settings specified on the Dashboard Configuration dialog are applied only to the current user's session.

4.2 Managing custom dashboards

PEM displays performance statistics through a number of system-defined dashboards; each dashboard contains a series of summary views that contain charts, graphs and tables that display statistics related to the selected object. You can use the Manage Dashboards tab to create and manage custom dashboards that display the information that is most relevant to your system.

To create a custom dashboard, click the Create New Dashboard link (located in the Quick Links section of the Manage Dashboards tab).

To modify an existing dashboard, click the edit icon to the left of a dashboard name. The dashboard editor will open, displaying the definition of the dashboard. When you've finished modifying the dashboard's definition, click the Save button to preserve your changes; click Cancel to exit without saving your changes.

To delete a dashboard, click the delete icon to the left of a dashboard name. A popup will ask you to confirm that you wish to delete the dashboard; click OK to delete the selected dashboard.

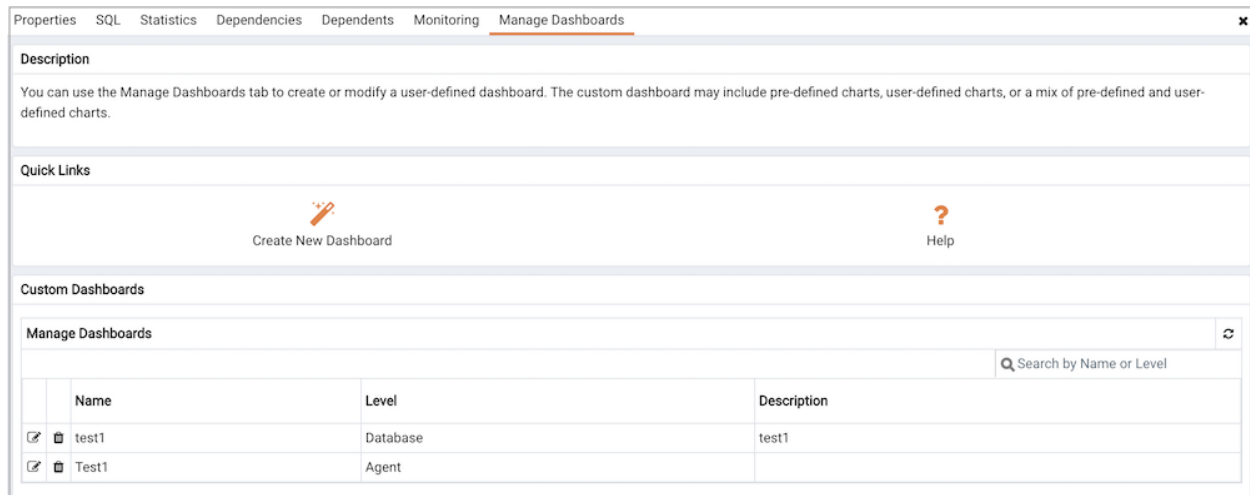


Fig. 3: The Manage Dashboards tab

4.2.1 Creating a custom dashboard

You can use the PEM dashboard editor to create or modify a user-defined dashboard. The custom dashboard may include pre-defined charts, user-defined charts or a mix of pre-defined and user-defined charts.

Use the fields in the **Configure** section to specify general information about the dashboard:

- Specify a name for the dashboard in the **Name** field. The name specified will also be the title of the dashboard if the title is displayed.
- Use the **Level** drop-down listbox to specify the level of the PEM hierarchy within the PEM client on which the dashboard will be displayed. A dashboard may be accessed via the Dashboards menu on a Global level, an Agent level, the Server level or the Database level. Each selected level within the list will expose a different set of metrics on which the custom dashboard's charts may be based.
- Provide a description of the dashboard in the **Description** field.

Provide information in the fields in the **Ops dashboard options** box if the dashboard will be used as an Ops dashboard:

- Set the **Ops Dashboard?** field to Yes to instruct the server to create a dashboard that is formatted for display on an Ops monitor.
- Set the **Show Title?** field to Yes to display the dashboard name at the top of the Ops dashboard.
- Use the **Font** drop-down list box to select a custom font style for the title. The selected font style will be displayed in the **Preview** box.
- Use the **Font size** drop-down list box to select a custom font size for the title. The selected font style will be displayed in the **Preview** box.

Use the **Permissions** box to specify the users that will be able to view the new dashboard:

- Set the **Share with all** slider to Yes to instruct the server to allow all Teams to access the dashboard, or set **Share with all** to No to enable the **Access permissions** field.
- Use the **Access permissions** field to specify which roles can view the new dashboard. Click in the field, and select from the list of users to add a role to the list of users with dashboard access.

When you've completed the **Configure Dashboard** section, click the arrow in the upper-right corner to close the section, and access the **Dashboard Layout Design** section.

The screenshot shows the 'Manage Dashboards' tab in the application. The 'Configure' section is active, displaying fields for 'Name' (test), 'Level' (Global), and 'Description'. Below this is the 'Ops dashboard options' section with toggle switches for 'Ops dashboard?' and 'Show title?' (both set to 'No'), and dropdowns for 'Font' and 'Font size'. The 'Permissions' section includes a 'Share with all users?' toggle (set to 'Yes') and an 'Access permissions' field with a note: 'Specify the user groups that will have access to the new dashboard.' At the bottom, there is a 'Dashboard Layout Design' section with a right-pointing arrow. The interface includes a help icon (?) on the bottom left and 'Cancel' and 'Save' buttons on the bottom right.

Fig. 4: The Create Dashboard editor

The screenshot shows the 'Dashboard Layout Design' section of the editor. It displays a 'Section #1' containing three dashboard components: 'test', 'Disk Information', and 'Alerts Status Info'. Each component has a 'Chart width' dropdown (set to '50%') and a 'Chart alignment' dropdown (set to 'Center'). The 'test' component includes an 'Edit' button. The 'Disk Information' component includes a description: 'This graph indicates the number of 8KB blocks read from disk(s), and the number of 8KB blocks written to disk(s) over the last week.' and an 'Edit' button. The 'Alerts Status Info' component includes a table icon and an 'Edit' button. The interface includes a help icon (?) on the bottom left and 'Cancel' and 'Save' buttons on the bottom right.

Fig. 5: Modifying a Section Header

Click the edit icon in a section header to specify a section name; then, click the add icon (+) to add a chart to the section.

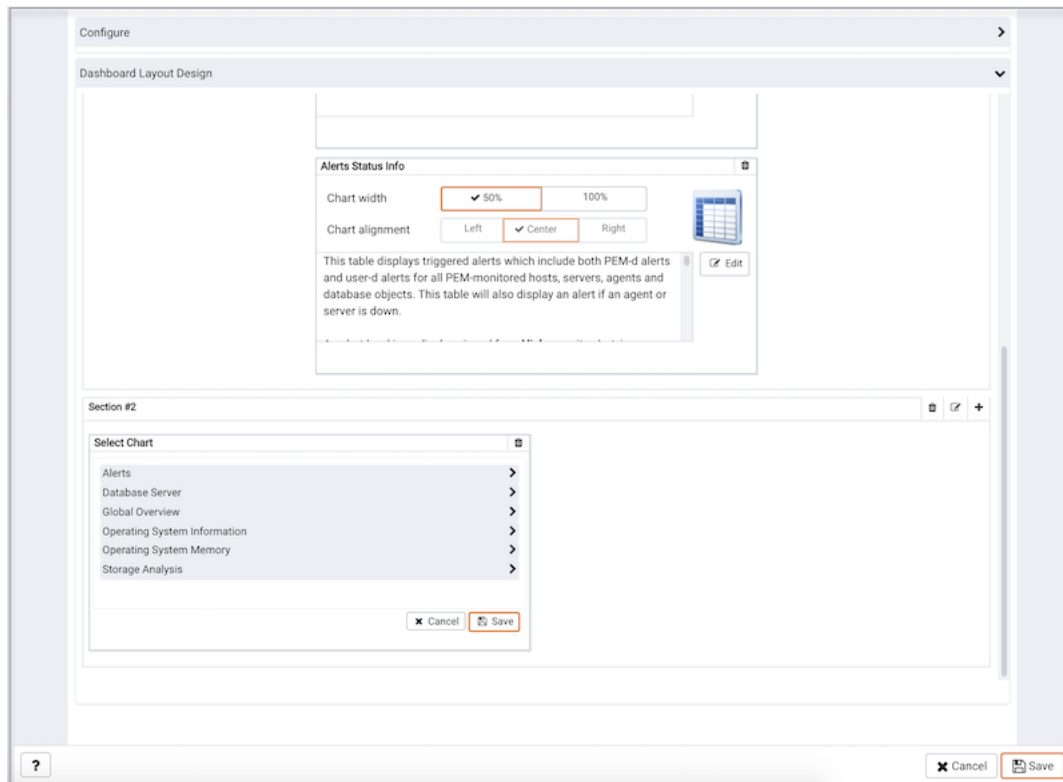


Fig. 6: Adding a Chart

Use the arrows to the right of each chart category to display the charts available and select a chart.

Use the chart detail selectors to specify placement details for the chart:

- Use the **Chart width** selector to indicate the width of the chart; select 50% to display the chart in half of the dashboard, or 100% to use the whole dashboard width.
- Use the **Chart alignment** selector to indicate the position of the chart within the section:

Select **Left** to indicate that the chart should be left-justified.

Select **Center** to indicate that the chart should be centered.

Select **Right** to indicate that the chart should be right-justified.

Please note that tables are always displayed centered.

When creating or editing a custom dashboard, you can use drag and drop to re-arrange the charts within a section or to move a chart to a different section.

To add another chart to your dashboard, click the add icon (+) in the section header. When you've finished editing the dashboard, click the **Save** button to save your edits and exit.

To exit without saving your changes, click the **Cancel** button.

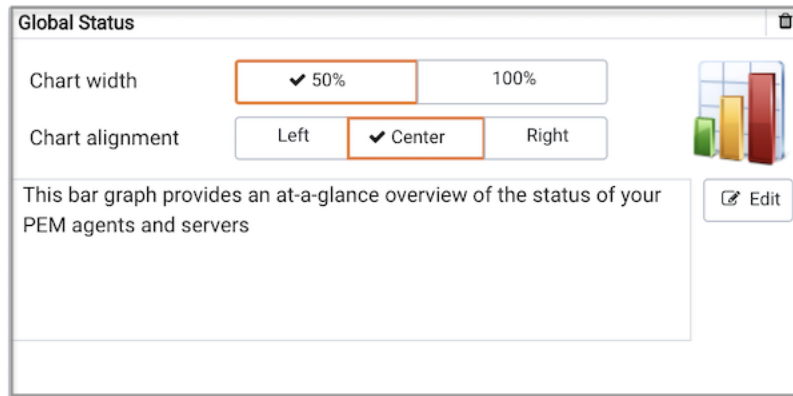


Fig. 7: Specifying placement details for a chart

4.2.2 Creating an Ops dashboard

You can use the PEM dashboard editor to create a custom dashboard formatted for display on an Ops monitor. An Ops dashboard displays the specified charts and graphs, while omitting header information and minimizing extra banners, titles, and borders.

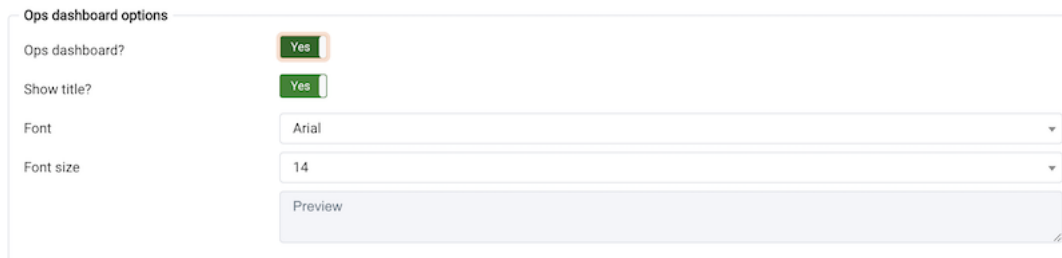


Fig. 8: Ops dashboard options

To create an Ops dashboard, provide detailed information about the Ops display in the Ops dashboard options section of the Create Dashboard dialog.

- Set the Ops Dashboard? field to Yes to instruct the server to create a dashboard that is formatted for display on an Ops monitor.
- Set the Show Title? field to Yes to display the dashboard name at the top of the Ops dashboard.
- Use the Font drop-down list box to select a custom font style for the title. The selected font style will be displayed in the Preview box.
- Use the Font size drop-down list box to select a custom font size for the title. The selected font style will be displayed in the Preview box.

After adding charts and tables to the Ops dashboard, click the Save button to save your work. You can then access the dashboard by navigating through the Dashboards menu of the hierarchy level specified in the Level field on the New Dashboard dialog.

4.3 Using the Manage Charts tab

You can use the **Manage Charts** tab to access dialogs that allow you to create or modify a custom line chart or table, or import a Capacity Manager template for use in a custom chart. After defining a chart, you can display the chart on a custom dashboard. To open the **Manage Charts** tab, select **Manage Charts . . .** from the PEM client Management menu.

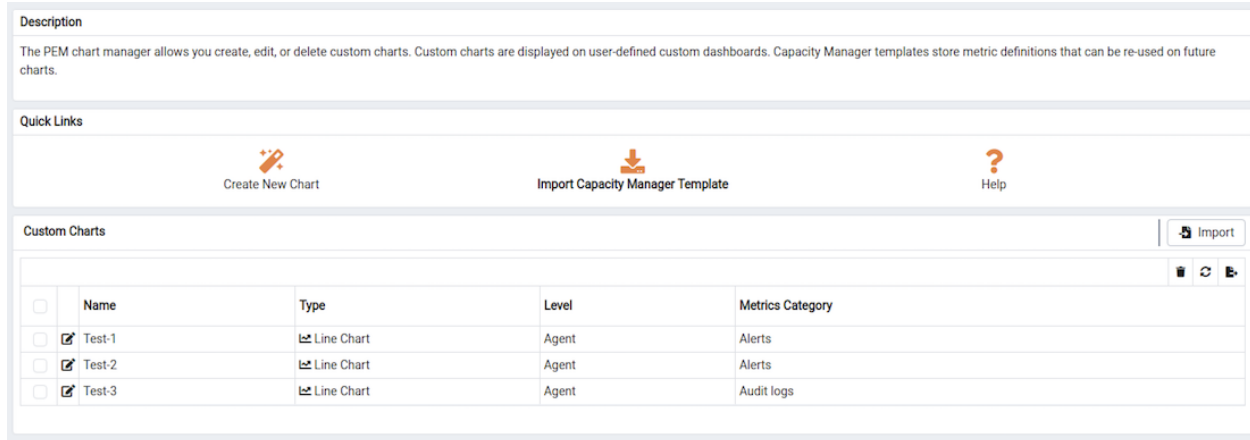


Fig. 9: The Manage Charts tab

The **Manage Charts** tab provides a **Quick Links** menu that allows you to access dialogs to:

- **Create a New Chart** for use on a custom dashboard.
- **Import a Capacity Manager** template to use as a template for creating a custom chart.
- Access online **Help**.

The **Custom Charts** table displays a list of user-defined charts; when a chart is newly added, the font displays in green. When you add an additional chart or refresh the screen, the name of the chart is displayed in black.

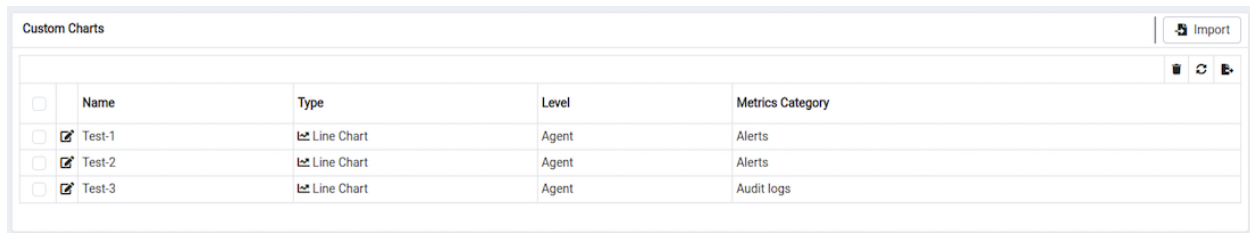


Fig. 10: The Custom Charts table

Use the search box in the upper-right hand corner of the **Custom Charts** table to search through your custom charts. Specify a:

- Chart name
- Type
- Level
- Metrics Category

Use icons to the left of a charts name in the **Custom Charts** table to manage a chart:

- Click the edit icon to open the Chart Configuration wizard and modify aspects of the chart or table.
- Click the delete icon to delete the selected chart.

4.3.1 Creating a custom chart

Click the Create New Chart icon in the Quick Links section of the Manage Charts tab to open the Create Chart wizard. The wizard will walk you through the steps required to define a new chart.

The screenshot shows a 'Create Chart - Chart Configuration (step 1 of 4)' dialog box. On the left, a vertical progress bar indicates the current step: '1 Configure Chart' (highlighted with a right arrow), followed by '2 Select Metrics', '3 Set Options', and '4 Set Permissions'. The main area contains the following fields:

- Name:** A text input field containing 'Top_Five_Table_Chart'.
- Category:** A dropdown menu showing 'Database Object Activity'.
- Type:** Two radio buttons; 'Line chart' is selected (indicated by an orange dot), and 'Table' is unselected.
- Description:** A large, empty text area for entering a description.

At the bottom of the dialog, there are four buttons: a help icon (?), 'Cancel', 'Back', 'Next', and 'Finish' (highlighted with an orange border).

Fig. 11: Specifying general information about the chart

Use the fields on the **Configure Chart** dialog to specify general information about the chart:

- Specify the name of the chart in the **Name** field.
- Use the drop-down listbox in the **Category** field to specify the category in which this chart will be displayed; when adding a custom chart to a custom dashboard, the chart will be displayed for selection in the category specified.
- Use the radio buttons in the **Type** field to specify if the chart will be a **Line chart** or a **Table**.
- Provide a description of the chart in the **Description** field. The description will be displayed to the user viewing the chart (on a custom dashboard) when they click the information icon.

When you've completed the fields on the **Configure Chart** dialog, click **Next** to continue.

Use the fields on the **Select Metrics** dialog to select the metrics that will be displayed on the chart.

- Use the **Metric level** drop-down listbox to specify the level of the PEM hierarchy from which you wish to select metrics. You can specify Agent, Database, or Server. Each level offers access to a unique set of probes and metrics.
- Use the tree control in the **Available metrics** box to select the metrics that will be displayed on the chart.

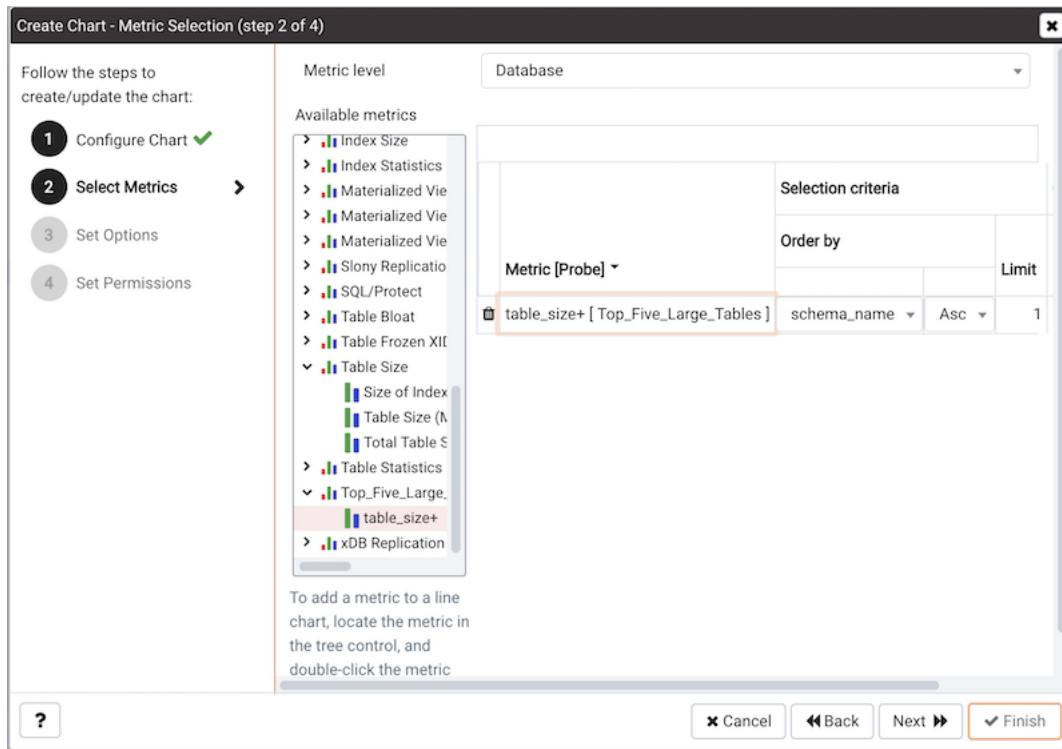


Fig. 12: Specifying the metrics that will be displayed

If you are creating a table, you may only select metrics from one probe; each node of the tree control lists the metrics returned by a single probe. Expand a node of the tree control, and check the boxes to the left of a metric name to include that metric data in the table.

If you are creating a line chart, expand the nodes of the tree control and double-click each metric that you would like to include in the chart.

- Use the fields in the Selected metrics panel to specify how the metric data will be displayed in your chart. The selection panel displays the name of the metric in the (non-modifiable) Metric [Probe] column. You can:
- Click the garbage can icon to delete a metric from the list of selected metrics. - Use the drop-down listboxes in the Selection Criteria column to specify the order of the data displayed. - Use the Limit field to specify the number of rows in a table or lines in a chart:

The maximum number of lines allowed in a chart is 32.

The maximum number of rows allowed in a table is 100.

- If you are creating a line chart, PEM supports comparisons of cross-hierarchy metrics.
- Click the compare icon to open a selection box that allows you to select one or more probe-specific attributes (i.e. CPUs, interfaces, databases, etc.) to compare in the chart. - Click the copy icon to apply your selections to all of the metrics for the same probe. When the popup opens, click Yes to confirm that other selections for the same probe will be overwritten, or No to exit the popup without copying the attributes.

When you've completed the fields on the Select Metrics dialog, click Next to continue.

Use the fields on the Set Options dialog to specify display options for your chart:

- Use the Auto Refresh field to specify the number of minutes between chart updates - choose a value from 1 to 120. The default auto refresh rate is 2 minutes.

Create Chart - Chart Options (step 3 of 4)

Follow the steps to create/update the chart:

- 1 Configure Chart ✓
- 2 Select Metrics ✓
- 3 Set Options ➔
- 4 Set Permissions

Auto refresh Minute(s)
Please specify the number of minutes between chart updates.

Line chart options

Points to plot
Please specify the maximum number of points to be plotted on the chart.

Historical span Day(s) Hour(s) Minute(s)
Please specify the number of minutes, hours or days of historical data that should be included on the chart.

Data extrapolation

☒ No Extrapolation ☐ Span ☐ Threshold

Data will not be extrapolated into the future.

Note: Extrapolated data is calculated using a linear trend analysis algorithm on the historical data. The accuracy of the extrapolated data depends on the available data in the historical span.

?

Fig. 13: Specifying chart options

Use fields under the Line chart options heading to specify display preferences for a line chart:

- Use the **Points to plot** field to specify the maximum number of points that will be plotted on the chart.
- Use the fields to the right of the **Historical span** label to specify how much historical data should be displayed on the chart:
- Use the **Day(s)** field to specify the number of days of historical data that should be included on the chart.
- Use the **Hour(s)** field to specify the number of hours of historical data that should be included on the chart.
- Use the **Minute(s)** field to specify the number of minutes of historical data that should be included on the chart.

Use the fields in the **Data extrapolation** box to specify if PEM should generate extrapolated data based on historical data:

- Click the **No Extrapolation** label to omit extrapolated data from the chart.
- Click the **Span** label to use the Days and Hours selectors to specify the period of time spanned by the metrics on the chart.
- Click the **Threshold** label to use threshold selectors to specify a maximum or minimum value for the chart.

When you've completed the fields on the **Set Options** dialog, click **Next** to continue.

Use the fields on the **Set Permissions** dialog to specify display options for your chart.

- Set the **Share with all** slider to **Yes** to indicate that the chart will be available to all authorized users, or **No** to restrict access to the users or groups specified in the **Access permissions** field.
- Use the **Access permissions** field to select the group or groups that will have access to the chart.

When you've finished defining the chart, click **Finish** to save your edits and add your chart to the list on the **Manage Charts** tab.

Create Chart - Chart Options (step 3 of 4)

Follow the steps to create/update the chart:

- 1 Configure Chart ✓
- 2 Select Metrics ✓
- 3 Set Options →
- 4 Set Permissions

Auto refresh Minute(s)
Please specify the number of minutes between chart updates.

Line chart options

Points to plot
Please specify the maximum number of points to be plotted on the chart.

Historical span Day(s) Hour(s) Minute(s)
Please specify the number of minutes, hours or days of historical data that should be included on the chart.

Data extrapolation

☒ No Extrapolation
 ☐ Span
 ☐ Threshold

Data will not be extrapolated into the future.

Note: Extrapolated data is calculated using a linear trend analysis algorithm on the historical data. The accuracy of the extrapolated data depends on the available data in the historical span.

Fig. 14: Specifying access permissions

Description

The PEM chart manager allows you create, edit, or delete custom charts. Custom charts are displayed on user-defined custom dashboards. Capacity Manager templates store metric definitions that can be re-used on future charts.

Quick Links

Create New Chart
 Import Capacity Manager Template
 Help

Custom Charts

	Name	Type	Level	Metrics Category
☒	test1	Table	Database	Database Object Activity
☒	Test1	Line Chart	Agent	Alerts
☒	Top_Five_Table_Chart	Line Chart	Database	Database Object Activity

Fig. 15: The chart definition is displayed on the Manage Charts tab

4.3.2 Importing a Capacity Manager Template

Click the **Import Capacity Manager Template** icon in the **Quick Links** section of the **Manage Charts** tab to open the **Create Chart** dialog, and use a Capacity Manager template as a starting point for a chart or table.

Fig. 16: Importing a Capacity Manager template

When the **Create Chart** dialog opens, provide information about the custom chart:

- Use the drop-down listbox in the **Import capacity template** field to select the name of the template on which the chart will be based.
- Specify the name of the chart in the **Name** field.
- Use the drop-down listbox in the **Category** field to specify the category in which this chart will be displayed. When adding a custom chart to a custom dashboard, the chart will be displayed for selection in the **Category** specified.
- Use the radio buttons in the **Type** field to specify if the chart will be a **Line chart** or a **Table**.
- Provide a description of the chart in the **Description** field. The description will be displayed to the user viewing the chart (on a custom dashboard) when they click the information icon.

Click **Next** to continue to the **Select Metrics** dialog.

The **Select Metrics** window allows you to review the metrics specified by the selected template. The bottom panel of the chart editor displays the metrics that will be included in the chart. The metrics included in the chart are not modifiable via the chart editor; to modify the metrics, you must use the Capacity Manager utility to update the template.

When you've reviewed the metrics, click **Next** to continue to the **Set Options** dialog.

Create Chart - Metric Selection (step 2 of 4)

Follow the steps to create/update the chart:

1 Configure Chart ✓

2 Select Metrics ➤

3 Set Options

4 Set Permissions

Metric level

Capacity Report Chart

Metrics	Metric details
Blocks Read+	Display Name Blocks Read+ (Postgres Enterprise Mana Probe: IO Analysis Metric: Blocks Read+ Host: Postgres Enterprise Manager Host
Blocks Read+	Display Name Blocks Read+ (Postgres Enterprise Mana Probe: IO Analysis Metric: Blocks Read+ Host: Postgres Enterprise Manager Host
Blocks Read	Display Name Blocks Read (Postgres Enterprise Mana Probe: IO Analysis Metric: Blocks Read Host: Postgres Enterprise Manager Host
Blocks Read	Display Name Blocks Read (Postgres Enterprise Mana Probe: IO Analysis Metric: Blocks Read Host: Postgres Enterprise Manager Host
Blocks Written+	Display Name Blocks Written+ (Postgres Enterprise Ma Probe: IO Analysis Metric: Blocks Written+

?

Cancel

Back

Next

Finish

Fig. 17: The template metrics

Create Chart - Chart Options (step 3 of 4)

Follow the steps to create/update the chart:

1 Configure Chart ✓

2 Select Metrics ✓

3 Set Options >

4 Set Permissions

Auto refresh

2

Minute(s)

Please specify the number of minutes between chart updates.

Data extrapolation

✓ Historical days and extrapolated days

Historical days and threshold

Historical

5

Day(s)

Extrapolated

0

Day(s)

?

✕ Cancel

⏪ Back

Next ⏩

✓ Finish

Fig. 18: Selecting chart options

Use the fields on the Set Options window to specify display options for your chart:

- Use the Auto Refresh field to specify the number of minutes between chart updates - choose a value from 1 to 120. The default auto refresh rate is 2 minutes.

Use the fields in the Data extrapolation box to specify the time period covered by the chart. You can either:

- click the Historical days and extrapolated days label and provide:
 - the number of days of historical data that should be charted in the Historical field.
 - the number of projected days that should be charted in the Extrapolated field.
- or, click the Historical days and threshold label and provide:
 - the number of days of historical data that should be charted in the Historical field
 - the threshold value at which the chart will end.

When you've completed the Set Options window, click Next to continue.

The screenshot shows the 'Create Chart - Security (step 4 of 4)' window. On the left, a progress bar indicates the steps: 1. Configure Chart (checked), 2. Select Metrics (checked), 3. Set Options (checked), and 4. Set Permissions (active). The main area is divided into two sections. The top section, 'Share with all users?', has a green 'Yes' button. The bottom section, 'Access permissions', has a text input field with the placeholder 'Specify the user groups that will have access to the new chart.' At the bottom of the window, there are four buttons: 'Cancel', 'Back', 'Next', and 'Finish' (highlighted with an orange border).

Fig. 19: Selecting permissions for the chart

Use the fields on the Set Permissions window to specify display options for your chart:

- Set the Share with all slider to Yes to indicate that the chart will be available to all authorized users, or No to restrict access to the users or groups specified in the Access permissions field.
- Use the Access permissions field to select the group or groups that will have access to the chart.

When you've finished defining the chart, click Finish to save your edits and add your chart to the list on the Manage Charts tab.

4.4 Probes

A probe is a scheduled task that retrieves information about the database objects that are being monitored by the PEM agent. PEM uses the collected information to build the graphs displayed on each homepage. The **Manage Probes** tab (accessed via the **Management** menu) allows you to modify the data collection schedule and the length of time that PEM will retain information returned by a specific probe.

4.4.1 System probes

Unless otherwise noted, Postgres Enterprise Manager enables the following probes at the server, database, schema, extension (starting with version 8.4), or agent levels:

Probe Name	Information Monitored by Probe	Level
Background Writer Statistics	This probe monitors information about the background writer. The information includes: The number of timed checkpoints The number of requested checkpoints The number of buffers written (by checkpoint) The number of buffers written (by background writer) The number of background writer cycles The number of background buffers written The number of buffers allocated	Server
Barman Configuration	This probe returns information about the Barman tool global configuration.	Agent
Barman Information	This probe returns information about the Barman tool.	Agent
Barman Server	This probe returns information about the respective database server configuration monitored by Barman.	Agent
Barman Server Status	This probe returns information about the respective database server status monitored by Barman.	Agent
Barman Server Backup	This probe returns information about the backups of the respective database servers.	Agent
Barman Server WAL Status	This probe returns information about the Barman server WAL files.	Agent
Blocked Session Information	This probe provides information about blocked sessions.	Server
CPU Usage	This probe monitors CPU Usage information.	Agent
Data and Log File Analysis	This probe monitors information about log files. The information includes: The name of the log file The directory in which the log file resides	Server
Database Frozen XID	This probe monitors the frozen XID of each database.	Server
Database Size	This probe monitors information about the size of the monitored databases. The information includes: The time the information was gathered The database name The database size (in MB's).	Server

continues on next page

Table 1 – continued from previous page

Probe Name	Information Monitored by Probe	Level
Database Statistics	This probe monitors database statistics. The information includes: The number of backends The number of transactions committed The number of transactions rolled back The number of blocks read The number of blocks hit The number of rows returned The number of rows fetched The number of rows inserted The number of rows updated The number of rows deleted	Server
Disk Busy Info	This probe monitors information about disk activity. Note: This probe is not supported on Mac OS X, Solaris or HP-UX	Agent
Disk Space	This probe monitors information about disk space usage. The information includes: The amount of disk space used The amount of disk space available	Agent
EDB Audit Configuration	This probe monitors the audit logging configuration of EDB Postgres Advanced Server.	Server
Failover Manager Cluster Info	This probe monitors a Failover Manager cluster, returning information about the cluster. This probe is disabled unless a cluster name and path of the Failover Manager binary is provided on the Server Properties dialog.	Server
Failover Manager Node Status	This probe monitors a Failover Manager cluster, returning detailed about each node within the cluster. This probe is disabled unless a cluster name and path of the Failover Manager binary is provided on the Server Properties dialog.	Server
Function Statistics	This probe monitors a database, retrieving information about functions. The information includes: Function names Argument types Return values	Database
Index Size	This probe monitors a database, retrieving information about indexes. The information includes: The name of the index The time the data was gathered The size of the index (in MB's)	Database
Index Statistics	This probe monitors index statistics. The information includes: The number of index scans The number of rows read The number of rows fetched The number of blocks read The number of blocks hit	Database
Installed Packages	This probe monitors the packages that are currently installed. The information gathered includes: The name of the installed package The version of the installed package The date and time that the probe executed	Agent
IO Analysis	This probe monitors disk I/O information in. The information includes: The number of blocks read The number of blocks written The date and time that the probe executed Note: This probe is not supported on Mac OS X	Agent

continues on next page

Table 1 – continued from previous page

Probe Name	Information Monitored by Probe	Level
Load Average	This probe monitors CPU load averages. The information includes: The 1-minute load average The 5-minute load average The 15-minute load average Note: This probe is not supported on Windows	Agent
Lock Information	This probe monitors lock information. The information includes: The database name The lock type The lock mode The process holding the lock	Server
Memory Usage	This probe monitors information about system memory usage. The information includes: Total RAM in MB Free RAM in MB Total swap memory in MB Free swap memory in MB Shared system memory in MB (It is used by tuning wizard to tune the memory parameters for the database server) - On non-windows system, it is <i>shmmax</i> value and read from <i>/proc/sys/kernel/shmmax</i> . - On windows, it is same as total memory.	Agent
Network Statistics	This probe monitors network statistics. The information includes: The interface IP address The number of packets sent The number of packets received The number of bytes sent The number of bytes received The link speed (in MB/second)	Agent
Number of Prepared Transactions	This probe stores the number of prepared transactions.	Server
Number of WAL Files	This probe monitors the number of WAL files.	Server
Object Catalog: Database	This probe monitors a list of databases and their properties. The information includes: The database name The database encoding type If the database allows user connections or system connections	Server
Object Catalog: Foreign Key	This probe monitors a list of foreign keys and their properties. The information includes: The name of the table that contains the foreign key The name of the table that the foreign key references The name of the database in which the table resides The name of the schema in which the table resides	Schema
Object Catalog: Function	This probe monitors a list of functions and their properties. The information includes: The name of the function The name of the schema in which the function resides The name of the database in which the function resides	Schema
Object Catalog: Index	This probe monitors a list of indexes and their properties. The information includes: The name of the index The name of the table that the index is associated with The name of the database in which the indexed table resides	Schema
Object Catalog: Schema	This probe monitors a list of schemas and their associated databases and servers.	Database
Object Catalog: Sequence	This probe monitors a list of sequences and their properties.	Schema

continues on next page

Table 1 – continued from previous page

Probe Name	Information Monitored by Probe	Level
Object Catalog: Table	This probe monitors a list of table information. The information includes: The table name The name of the schema in which the table resides The name of the database in which the schema resides A Boolean indicator that indicates if the table has a primary key	Schema
Object Catalog: Tablespace	This probe monitors a list of tablespaces.	Server
Operating System Information	This probe monitors the operating system details and boot time.	Agent
Package Catalog	This probe monitors the packages that are currently available for installation. The information gathered includes: The package name The package version	Agent
PG HBA Conf	This probe monitors authentication configuration information from the <code>pg_hba.conf</code> file.	Server
Server Information	This probe monitors server information.	Server
Session Information	This probe monitors session information. The information includes: The name of the session user The date and time that the session connected to the server The status of the session at the time that the information was gathered (idle, waiting, etc) The client address and port number	Server
Settings	This probe monitors the values currently assigned to GUC variables.	Server
SQL Protect	This probe monitors a server, retrieving information about SQL injection attacks.	Server
Slony Replication	This probe monitors lag data for clusters replicated using Slony.	Database
Streaming Replication	This probe monitors a cluster that is using streaming replication, retrieving information about: The sent Xlog location (in bytes) The write Xlog location (in bytes) The flush Xlog location (in bytes) The replay Xlog location (in bytes) The Xlog lag (in segments) The Xlog lag (in pages)	Server
Streaming Replication Lag Time	This probe monitors a cluster that is using streaming replication, retrieving lag information about: Replication lag time (in seconds) Current status of replication (running/paused)	Server
Streaming Replication Database Conflicts	This probe monitors a database that is using streaming replication, retrieving information about any conflicts that arise. This includes information about queries that have been canceled due to: The # of drop tablespace conflicts The # of lock timeout conflicts The # of old snapshot conflicts The # of pinned buffer conflicts The # of deadlock conflicts	Server

continues on next page

Table 1 – continued from previous page

Probe Name	Information Monitored by Probe	Level
Table Bloat	This probe monitors information about the current table bloat. The information includes: The name of the table The name of the schema in which the table resides The estimated number of pages The estimated number of wasted pages The estimated number of bytes per row	Database
Table Frozen XID	This probe monitors the frozen XID of each table.	Schema
Table Size	This probe monitors information about table size. The information includes: Table size (in MB's) Total index size (in MB's) Total table size, with indexes and TOAST (in MB's)	Database
Table Statistics	This probe monitors table statistics. The information includes: The number of sequential scans The number of sequential scan rows The number of index scans The number of index scan rows The number of rows inserted The number of rows updated The number of rows deleted The number of live rows The number of dead rows The last VACUUM The last auto-vacuum The last ANALYZE The last auto-analyze The number of pages estimated by ANALYZE The number of rows estimated by ANALYZE	Database
Tablespace Size	This probe monitors a list of tablespaces and their sizes.	Server
User Information	This probe monitors a list of the current users. The stored information includes: The user name The user type (superuser vs. non-superuser) The server to which the user is connected	Server
WAL Archive Status	This probe monitors the status of the WAL archive. The stored information includes: The # of WAL archives done The # of WAL archives pending The last archive time The # of WAL archives failed The time of the last failure	Server
xDB Replication	This probe monitors lag data for clusters replicated using xDB replication.	Database

4.4.2 BDR probes

To monitor the BDR Group via BDR dashboards, the following probes must be enabled. All these probes are configured at extension level.

Note: Prior to version 8.4, all these probes are available at the server level.

The user with `bdr_superuser` will be able to view information from all the following probes.

All the following probes works with BDR Enterprise Edition .

Probe Name

Information Monitored by Probe

bdr_monitor role required?

Works with BDR SE?

Probe name	Execution Frequency			Enabled?		Data Retention	
	Default?	Minutes	Seconds	Default?	Probe Enable?	Default?	Days
BDR Conflict History Summary	No	5	0	No	Yes	Yes	7
BDR Global Locks	No	5	0	No	Yes	Yes	30
BDR Group Camo Details	No	5	0	No	Yes	Yes	30
BDR Group Raft Details	No	5	0	No	Yes	Yes	30
BDR Group Replication Slots Details	No	5	0	No	Yes	Yes	30
BDR Group Subscription Summary	No	5	0	No	Yes	Yes	30
BDR Group Versions Details	No	5	0	No	Yes	Yes	30
BDR Monitor Group Raft Status	No	5	0	No	Yes	Yes	30
BDR Monitor Group Versions	No	5	0	No	Yes	Yes	30
BDR Node Replication Rates	No	5	0	No	Yes	Yes	30
BDR Node Slots	No	5	0	No	Yes	Yes	30
BDR Node Summary	No	5	0	No	Yes	Yes	30
BDR Stat Relation	No	5	0	No	Yes	Yes	30
BDR Stat Subscription	No	5	0	No	Yes	Yes	30

Fig. 20: BDR Probes

Probe Name	Information Monitored by Probe	<i>bdr_monitor</i> role required?	Works with BDR SE?
BDR Conflict History Summary	This probe returns information about row conflicts per conflict type. The stored information includes: The local time of the conflict The type of the conflict	Yes	Yes
BDR Global Locks	This probe returns information about global locks in a BDR Group. The stored information includes: The name of the node where the global lock has originated The PID of the process holding the lock The type of lock (DDL or DML) The name of the locked relation(for DML Locks) or Keys(for advisory locks) The internal state of the lock acquisition process The list of backends waiting for the same global lock The time when the global lock acquire was initiated by origin node The time when the local node started trying to acquire the local lock The time acquire_stage last changed	Yes	Yes
BDR Group Camo Details	This probe returns information about Camo's in BDR Group. The stored information includes: The name of the node The node name for whom this node is partner The node name for whom this node is origin The connection status The readiness status The number of pending or unresolved camo transactions The lsn of last applied wal log The lsn of last received wal log	No	No

continues on next page

Table 2 – continued from previous page

Probe Name	Information Monitored by Probe	<i>bdr_monitor</i> role re-quired?	Works with BDR SE?
BDR Group Replication Slot Details	This probe returns information about replication slots in BDR Group. The stored information includes: The name of the BDR Group The name of the origin node The name of the target node The slot name on the origin node used by this subscription The active status The state of the replication (catchup,streaming,disconnected,...) The approximate lag time for reported write The approximate lag time for reported flush The approximate lag time for reported replay The bytes difference between sent_lsn and current WAL write position The bytes difference between write_lsn and current WAL write position The bytes difference between flush_lsn and current WAL write position 	No	Yes
BDR Group Subscription Summary	This probe returns information about the summary of Subscriptions in the BDR Group. The stored information includes: The name of the origin of the subscription The name of the target of the subscription The timestamp of the last replayed transaction The lag between now and time of last replayed transaction 	No	Yes
BDR Monitor Group Raft	This probe returns the status and message of a cluster-wide raft check.	Yes	Yes
BDR Group Raft Details	This probe returns the information about raft consensus status from all the nodes in BDR Group. The stored information includes: The name of the node The raft worker state on the node The node id of the RAFT_LEADER The raft election internal id The raft snapshot internal id	Yes	Yes
BDR Monitor Group Versions	This probe returns the status and message of cluster-wide version check.	Yes	Yes
BDR Group Versions Details	This probe returns the information about version details of the installed postgres, pglogical, bdr, and bdr edition for each node in the BDR Group. The stored information includes: The name of the node The installed postgres version on the node The installed pglogical version on the node The version of the BDR on the node The BDR edition (Standard/Enterprise)	No	Yes
BDR Node Replication Rates	This probe returns information about outgoing replication activity from a given node. The stored information includes: The name of the target peer node The latest sent position The latest position reported as replayed The approximate lag time for reported replay The bytes difference between replay_lsn and current WAL write position on origin The human readable bytes difference between replay_lsn and current WAL write position Approximate time required for the peer node to catchup to all the changes that are yet to be applied	Yes	No

continues on next page

Table 2 – continued from previous page

Probe Name	Information Monitored by Probe	<i>bdr_monitor</i> role re- quired?	Works with BDR SE?
BDR Node Slots	This probe returns information about the mapping of local BDR nodes to replication slots, their status, and replication progress. The stored information includes: The name of the slot The name of the target node The name of the BDR Group The database name on the target node The PID of the process attached to the slot The catalog XID needed by the slot The IP address of the client connection The latest sent position The latest position reported as replayed The approximate lag time for reported replay The Bytes difference between replay_lsn and current WAL write position The Human-readable bytes difference between replay_lsn and current WAL write position	Yes	Yes
BDR Node Summary	This probe returns information about all the nodes in the BDR Group. The stored information includes: The name of the Node The name of the BDR group the node is part of The consistent state of the node in human readable form The state which the node is trying to reach (during join or promotion) The name of subscribed repsets	Yes	Yes
BDR Workers	This probe returns information about workers in BDR node. The stored information includes: The PID of the worker process The worker query start timestamp The worker state change timestamp The worker wait event type The worker wait event The worker state The worker role name The worker commit timestamp The worker local timestamp The name of the origin node The receive LSN The receive commit LSN The last exact replay LSN The last exact flush LSN The last exact replay timestamp The worker query	Yes	Yes
BDR Work Errors	This probe returns information about the work errors in BDR node. The stored information includes: The process id of the worker causing the error The name of the BDR Group the node is part of The name of the origin node The name of the source node The name of the target node The name of the subscription The internal identifier of the role of this worker The name of the role of this worker The date and time of the error The age of the error The description of the error The context in which the error happened The remote relation id The subscription writer id The subscription writer name	Yes	Yes

4.4.3 Customizing probes

A probe is a scheduled task that returns a set of performance metrics about a specific monitored object. A probe retrieves statistics from a monitored server, database, operating system or agent. You can use the **Manage Probes** tab to override the default configuration and customize the behavior of each probe.

To open the **Manage Probes** tab, select **Manage Probes . . .** from the **Management** menu. The **Manage Probes** tab opens in the PEM client.

Properties SQL Statistics Dependencies Dependents Monitoring **Manage Probes** ✕

Description

Manage Custom Probes: PEM uses probes to retrieve statistics from a monitored server, database, operating system or agent. You can view, reconfigure, delete, or create your own custom probes.

Copy Probes: PEM allows copying of probes from any chosen object recursively down through the object hierarchy. Click on Copy Probes to quickly copy the displayed probe configuration to a selected target.

Quick Links

 Manage Custom Probes  Copy Probes  Help

Probes

Probe name	Execution Frequency			Enabled?		Data Retention	
	Default?	Minutes	Seconds	Default?	Probe Enable?	Default?	Days
Background Writer Statistics	☒	5	0	☒	☒	☒	180
Blocked Session Information	☒	5	0	☒	☒	☒	180
Data and Log File Analysis	☒	0	10	☒	☒	☒	180
Database Frozen XID	☒	720	0	☒	☒	☒	180
Database Size	☒	30	0	☒	☒	☒	180
Database Statistics	☒	30	0	☒	☒	☒	90
Failover Manager Cluster Info	☒	5	0	☒	☐	☒	7
Failover Manager Node Status	☒	5	0	☒	☐	☒	7
Lock Information	☒	5	0	☒	☒	☒	180
Number of Prepared Transactions	☒	5	0	☒	☒	☒	180
Number of WAL Files	☒	5	0	☒	☒	☒	180
Object Catalog: Database	☒	5	0	☒	☒	☒	180
Object Catalog: Tablespace	☒	5	0	☒	☒	☒	180
PG HBA Conf	☒	30	0	☒	☒	☒	180
Server Information	☒	5	0	☒	☒	☒	180
Server log Configuration	☒	0	10	☒	☒	☒	180
Session Information	☒	5	0	☒	☒	☒	180
Settings	☒	5	0	☒	☒	☒	180
Streaming Replication	☒	5	0	☒	☐	☒	180
Streaming Replication Database Conflicts	☒	5	0	☒	☐	☒	180
Streaming Replication Lag Time	☒	5	0	☒	☐	☒	180
Tablespace Size	☒	30	0	☒	☒	☒	180
User Information	☒	30	0	☒	☒	☒	180
WAL Archive Status	☒	30	0	☒	☐	☒	180

Fig. 21: The Manage Probes tab

The **Manage Probes** tab provides a set of Quick Links that you can use to create and manage probes:

- Click the **Manage Custom Probes** icon to open the **Custom Probes** tab and create or modify a custom probe.
- Click the **Copy Probes** icon to open the **Copy Probe** dialog, and copy the probe configurations from the currently

selected object to one or more monitored objects.

Note: At the moment the *Copy Probe* is not supported for the extension level probes.

A probe monitors a unique set of metrics for each specific object type (server, database, database object, or agent); select the name of an object in the tree control to review the probes for that object.

To modify the properties associated with a probe, highlight the name of a probe, and customize the settings that are displayed in the Probes table:

- Move the **Default** switch in the **Execution Frequency** columns to **N** to enable the **Minutes** and **Seconds** selectors, and specify a non-default value for the length of time between executions of the probe.
- Move the **Default** switch in the **Enabled?** column to **No** to change the state of the probe, and indicate if the probe is active or not active.

Note: If data from a disabled probe is used in a chart, the chart will display an information icon in the upper-left corner that allows you to enable the probe by clicking the provided link.

- Move the **Default** switch in the **Data Retention** column to **No** to enable the **Day(s)** field and specify the number of days that information gathered by the probe is stored on the PEM server.

The **Manage Probes** tab may display information about probes that cannot be modified from the current node. If a probe cannot be modified from the current dialog, the switches are disabled. Generally, a disabled probe can be modified from a node that is higher in the hierarchy of the PEM client tree control; select another object in the tree control to modify which probes are displayed or enabled in the **Manage Probes** tab.

4.4.4 Creating a custom probe

You can use the **PEM Custom Probes** tab to create a new probe or modify an existing user-defined probe. To open the **Custom Probes** tab, select the **Manage Custom Probes...** icon from the **Manage Probes** tab.

Description

System Probes: System probes are the built-in probes provided by PEM and are part of the PEM schema. These probes are differentiated in the Probes list by a grey background. You may only modify the Enabled, Interval and Data retention fields of a system probe.

Probes: Custom probes are those probes created by users. You can modify the Enabled, Interval and Data retention fields in the General tab, the Unit and Graphable fields of each column on the Columns tab, the code provided in the Code tab, and the code definition on the Alternate Code tab of a user-defined probe if the Applies to all database server versions? field for that probe is set to No.

You may delete only user-defined probes. When you delete a probe, the probe is marked for deletion and will be deleted later (when custom probes are purged). During the deletion the probe definition is deleted and any corresponding tables are dropped from the pemdata and pemhistory schemas.

Probes Show System Probes? ☐ No Import

	Probe name	Collection method	Target type	Execution frequency		Probe enabled?	Data retention
				Minutes	Seconds		
☒	Top_Five_Large_Tables	SQL	Table	1	0	Yes	1

Fig. 22: The Custom Probes dialog

Use the **Show System Probes?** switch to display or conceal the system probes on the **Custom Probes** tab.

You can use the Custom Probes tab to create a new probe or modify an existing probe. To create a new probe, click the Add icon in the upper-right corner of the tab; provide a name for the new probe in the Probe Name column. Then, select the Edit icon (located to the left of the probe name) to review or add the probe definition.

The screenshot displays the 'Probes' configuration interface. At the top, there's a 'Show System Probes?' toggle set to 'No' and an 'Import' button. Below is a table with the following columns: Probe name, Collection method, Target type, Execution frequency (Minutes, Seconds), Probe enabled?, and Data retention. A single probe is listed with a checkmark in the first column, an empty name, 'SQL' as the collection method, 'Server' as the target type, '5' minutes and '0' seconds for frequency, 'Yes' for enabled, and '1' for data retention. Below the table, the 'General' tab is active, showing a detailed configuration form. The 'Probe name' field is empty and has a red error message: 'Please specify Probe name'. The 'Collection method' is set to 'SQL'. A help text explains the collection methods: SQL, WMI, and Batch/Shell Script. The 'Target type' is set to 'Server'. The 'Execution frequency' is set to 5 minutes and 0 seconds. The 'Probe enabled?' checkbox is checked. The 'Data retention' is set to 1 day. The 'Discard from history?' checkbox is unchecked. The 'Platform' is set to '*nix'. A red error message bar at the bottom of the form reiterates 'Please specify Probe name'.

Fig. 23: Defining a custom probe – the General tab

Use the fields on the General tab to modify the definition of an existing probe or to specify the properties of a new probe:

- Use the Probe Name field to provide a name for a new probe.
- Use the Collection method field to specify the probe type. Use the drop-down listbox to select:
 - SQL - the probe will gather information via a SQL statement.
 - WMI - the probe will gather information via a Windows Management Instrumentation extension.
 - Batch - the probe will use a command-script or shell-script to gather information.

Before creating a batch probe on a Linux system, you must modify the agent.cfg file, setting the allow_batch_probes parameter equal to true, and restart the PEM agent. The agent.cfg file is located in one of the following directories:

- If you have installed PEM using graphical installer: /opt/edb/pem/agent/etc/agent.cfg - If you have installed PEM using RPM: /usr/edb/pem/agent/etc/agent.cfg

On 64-bit Windows systems, agent settings are stored in the registry. Before creating a batch probe, modify the registry entry for the AllowBatchProbes registry entry and restart the PEM agent. PEM registry entries are located in HKEY_LOCAL_MACHINE\Software\Wow6432Node\EnterpriseDB\PEM\agent.

Please note that batch probes are platform-specific. If you specify a collection method of Batch, you must specify a platform type in the Platform field.

To invoke a script on a Linux system, you must modify the entry for `batch_script_user` parameter of `agent.cfg` file and specify the user that should be used to run the script. You can either specify a non-root user or root for this parameter. If you do not specify a user, or the specified user does not exist, then the script will not be executed. Restart the agent after modifying the file.

To invoke a script on a Windows system, set the registry entry for `AllowBatchJobSteps` to true and restart the PEM agent.

- Use the **Target Type** drop-down listbox to select the object type that the probe will monitor. Target type is disabled if Collection method is WMI.
- Use the **Minutes** and **Seconds** selectors to specify how often the probe will collect data.
- Use the **Probe Enable?** switch to specify if the probe is enabled by default. Specify **Yes** to enable the probe by default, or **No** to specify that the probe is disabled by default.

Note: If data from a disabled probe is used in a chart, the chart will display an information icon in the upper-left corner that allows you to enable the probe by clicking the provided link.

- Use the **Data Retention** field to specify the number of days that gathered information will be retained in the probe's history table.
- Use the switch next to **Discard from history** to specify if the server should create a history table for the probe. Select **Yes** to discard probe history, or **No** to retain the probe history in a table.
- Use the **Platform** drop-down listbox to specify the type of platform that the probe will monitor. This field is enabled only when the Collection method is Batch.

The screenshot shows the 'Columns' tab of the 'Custom Probes' dialog. At the top, there's a table with columns: Probe name, Collection method, Target type, Execution frequency (Minutes, Seconds), Probe enabled?, and Data retention. Below this is a section for defining a new column with fields: Name, Internal name, Column type (Non key), Data type (numeric), Unit, Graphable? (Yes), Is PIT? (No), and Calculate PIT? (No). A red error message at the bottom states 'Please specify column name'.

Fig. 24: The Columns tab of the Custom Probes dialog

Use the **Columns** tab to define the columns in which the probe data will be stored. Navigate to the **Columns** tab, and click the **Add** button (in the upper-right corner) to define a new column. After providing a column name in the **Name** field, click the **Edit** button (to the left of the new column name) to provide information about the column:

- Provide a descriptive name for the column in the **Name** field.
- The **Internal Name** field is not enabled for user-defined probes.
- Use the **Column Type** drop-down listbox to specify if the column is a **Key** column (a primary key) or a **Non key** column. Non-key columns are generally metric items (values that can be graphed).
- Use the **Data Type** drop-down listbox to specify the type of data that will be stored in the column.
- Use the **Unit** field to specify the unit of measure that applies to the metric stored in the column. This unit is displayed on the Y-Axis of a custom chart or a Capacity Manager chart. This is an optional field.
- Use the **Graphable** switch to specify if the defined metric may be graphed, and that the probe should be accessible from the Capacity Manager or Manage Charts dialogs.
- Use the **Is PIT** switch to specify if the metric should be stored by point-in-time.

'Point-in-time' metrics are those metrics that change (increase or decrease) at any given point of time. For example, database size is a point-in-time metric; at any given point-in-time, the size of the database is fluctuating. Metrics that are not point-in-time (also referred to as cumulative metrics) are metrics whose size always increases over time. For example, Blocks Read and Tuples Read are cumulative metrics; the value stays the same or increases.

- Use the **Calculate PIT** switch to specify that the server should calculate a point-in-time value for the metric data. **Calculate PIT** is disabled if **Is PIT** is **Yes**.

PEM allows you to store point-in time-values of cumulative metrics as well. PEM subtracts the last collected value of a cumulative metric from the current value, and stores the difference as a point-in-time value.

The screenshot shows the 'Probes' dialog box with the 'Code' tab selected. The 'General' tab is also visible. The 'Code' tab contains a large text area for the SQL SELECT statement. A red error message at the bottom of the dialog says 'Please specify Probe name'.

Fig. 25: The Code tab of the Custom Probes dialog

Use the **Code** tab to specify the default code that will be executed by the probe:

- If the probe is a **SQL** probe, you must specify the **SQL SELECT** statement invoked by the probe on the **Code** tab. The column names returned by the query must match the **Internal Name** specified on the **Columns** tab. The number of columns returned by the query, as well as the column name, data type, etc. must match the information specified on the **Columns** tab.
- If the probe is a **batch** probe, you must specify the shell or **.bat** script that will be invoked when the probe runs. The output of the script should be as follows:

The first line must contain the names of the columns provided on the **Columns** tab. Each column name should be separated by a tab (t) character. From the second line onwards, each line should contain the data for each column, separated by a tab character.

If a specified column is defined as key column, you should ensure that the script does not produce duplicate data for that column across lines of output. The number of columns specified in the Columns tab and their names, data type, etc. should match with the output of the script output.

- If the probe is a WMI probe, you must specify the WMI query as a SELECT WMI query. The column name referenced in the SELECT statement should be same as the name of the corresponding column specified on the Column tab. The column names returned by the query must match the Internal Name specified on the Column tab. The number of columns returned by the query, as well as the column name, data type, etc. must match the information specified on the Columns tab.

Fig. 26: The Alternate Code tab of the Custom Probes dialog

Use the **Alternate Code** tab to provide code that will be invoked if the probe fires on a specific version of the server. To provide version-specific code, move the **Applies to any server version?** switch to **No**, and click the **Add** button. Then, use the **Database Version(s)** drop-down listbox to select a version, and click the **Edit** button (to the left of the version name) to provide the code that will execute when the probe fires.

If you select a database version, and leave the **Probe Code** column blank, PEM will invoke the code specified on the **Code** tab when the probe executes on a server that matches that version.

When you've finished defining the probe, click the **Save** icon (in the corner of the **Custom Probes** tab) to save the definition, and make the probe data available for use on custom charts and graphs.

4.4.5 Exporting or importing a probe

To **Export** the probe, select any probe/s from the **Manage Custom Probes** tab and then select the **Export** icon in the upper-right corner of the table. Select **Save File** option and then select **ok**, it will generate the JSON file.

To **Import** the probe, go to the **Manage Custom Probes** tab and then select the **Import** icon in the upper-right corner of the table.

Click on the **Browse** button to select the JSON file with the probe code to be imported and then click **Import**.

After selecting the file to import you can select the **skip existing** checkbox. If selected then it will skip the probe if it already exists.

If the checkbox is selected and the probe already exists, then it skips importing the probe with the message as below:

If the checkbox is not selected and the probe already exists, then it does not import the probe and throws the below error:

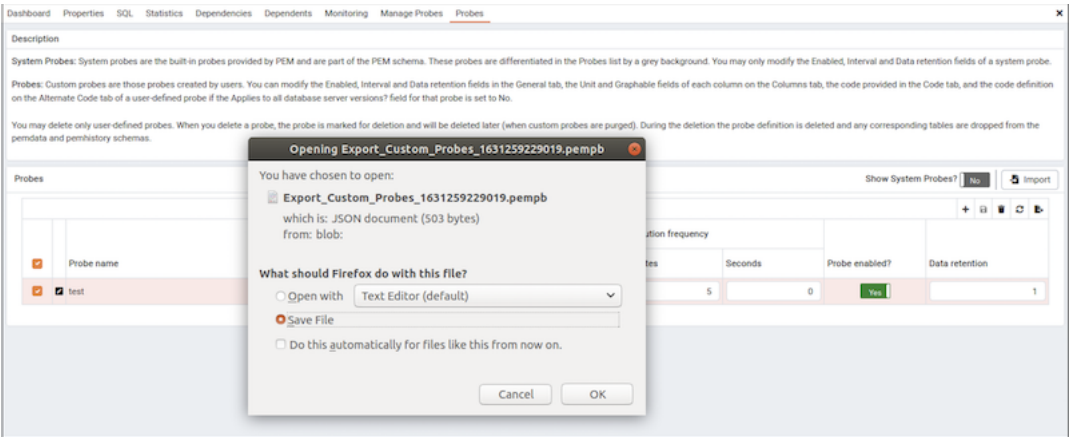


Fig. 27: Custom Probes - Export

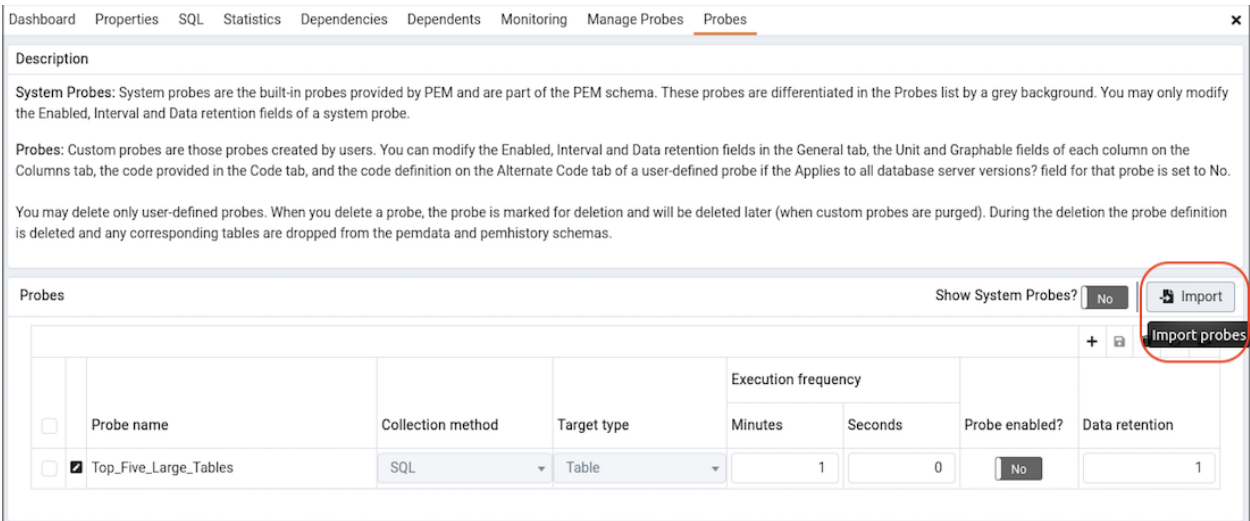


Fig. 28: Custom Probes Import



Fig. 29: Custom Probes - Import Browse

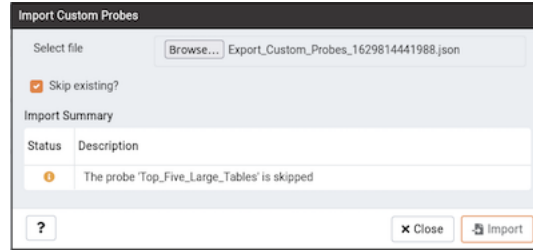


Fig. 30: Custom Probes - Import Skipped Message

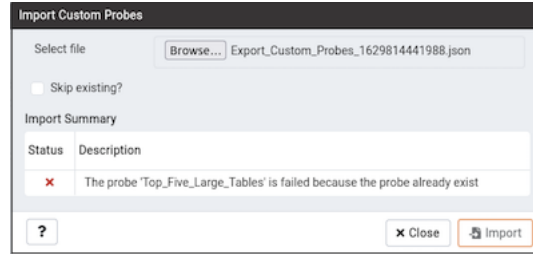


Fig. 31: Custom Probes - Import Error

Note: *Import* cannot overwrite the existing probe as it may be configured to retain historical data as per the configured retention policy.

If the checkbox is not selected and probe does not exist but the corresponding table in the pem schema exists, then it imports the probe successfully using the same table.

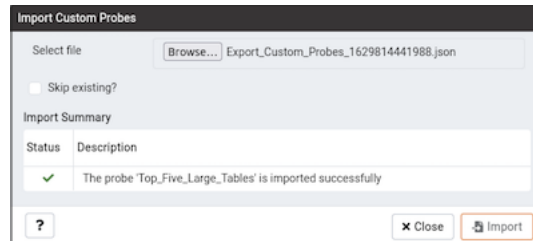


Fig. 32: Custom Probes Import Successful

Note: It is possible that probe is deleted and not listed on *Manage Custom Probe* tab, but still the table holding the data of that probe exists in the *pem* schema.

4.4.6 Deleting a probe

You may delete only user-defined probes. To delete a probe, select the probe name in the probes table, and select the Delete icon (located to the upper-right corner of the table). The probe history will persist for the length of time specified on the History Retention field in the probe definition. During the deletion the probe definition is deleted and any corresponding tables are dropped from the pemdata and pemhistory schemas.

System probes are the built-in probes provided by PEM, and are part of the PEM schema. You may only modify system probes; if you attempt to delete a system probe, you will receive an error from PEM.

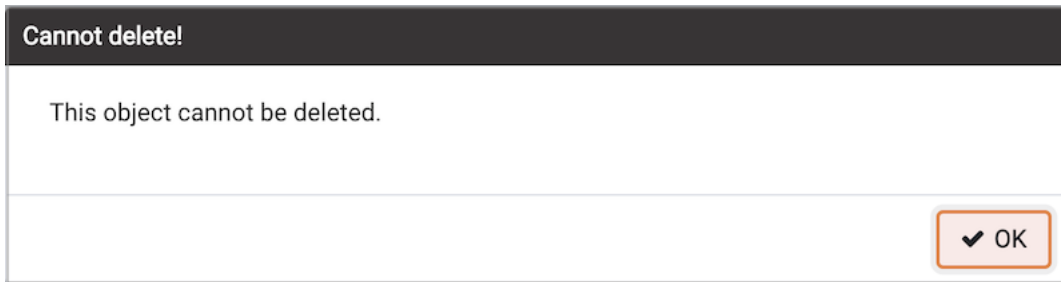


Fig. 33: Attempting to delete a system probe

4.4.7 Copying a probe

You can use the Copy Probe Configuration... dialog to copy probe definitions from one monitored object to one or more monitored objects of the same type. To open the Copy Probe Configuration... dialog, highlight the object from which you are copying probes in the PEM client tree control, and select Manage Probes from the Management menu. When the Manage Probes tab opens, click on Copy Probe to open the Copy Probe Configuration dialog:

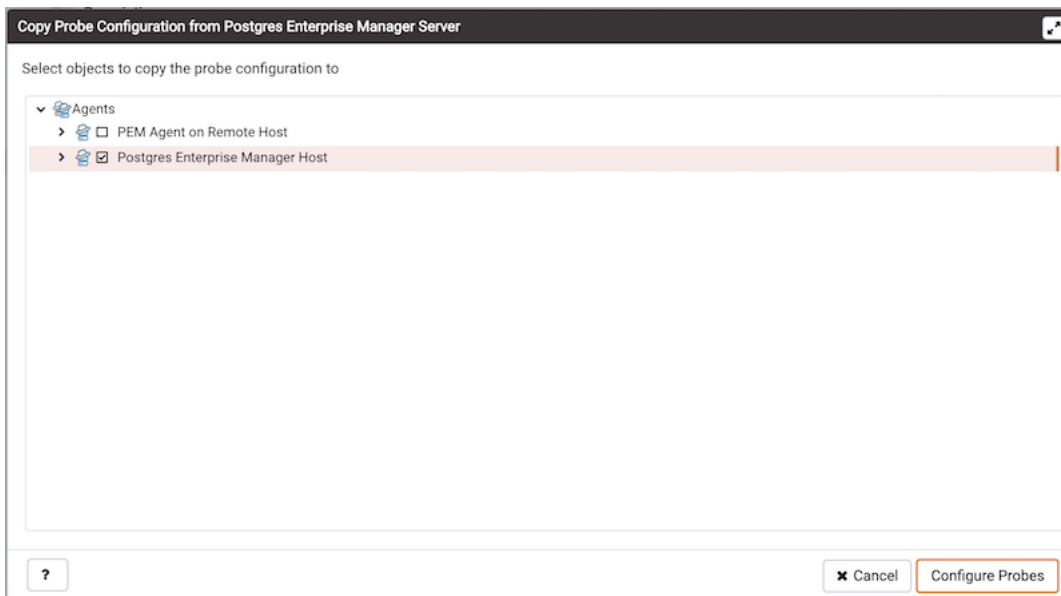


Fig. 34: The Copy Probe Configuration tree control

The dialog will copy the probe definitions from the object through which the Copy Probe Configuration dialog was opened, to the location(s) selected on the tree control.

Note that if you specify a parent node in the Copy Probe Configuration tree control, PEM will copy the probe configurations to each object (of the same type) that resides under that node in the tree control. For example, to copy the probe definitions from one schema to all schemas that reside within a database, select only the parent database of the target schemas. Please note that a red warning symbol is displayed to the left of the name of a listed target object if that object is the source of the probe that is being copied.

When you have selected the target object or objects, click the **Configure Probes** button to copy the probe definitions to the location selected on the dialog.

4.5 Alerting

PEM continually monitors registered servers and compares performance metrics against pre-defined and user-specified thresholds that constitute good or acceptable performance for each statistic. Any deviation from an acceptable threshold value triggers an alert. An alert is a system-defined or user-defined set of conditions that PEM compares to the system statistics. Alerts call your attention to conditions on registered servers that require your attention.

4.5.1 Viewing the alerts via Global dashboard

When your system statistics deviate from the boundaries specified for that statistic, the alert triggers, displaying a high (red), low (yellow), or medium (orange) severity warning in the left-most column of the **Alert Status** table on the **Global Overview** dashboard.

Alerts Status									
	Alarm Type	Object Description	Alert Name	Value	Database	Schema	Package	Object	Alerting Since
▶	● High	EDB Postgres Advanced Server 11	Database size in server	113 MB					2020-04-22 11:50:00
▶	● High	EDB Postgres Advanced Server 11	Last Vacuum	Never ran					2020-04-21 21:26:54
▶	● High	EDB Postgres Advanced Server 11	Last AutoVacuum	140.21 hrs					2020-04-22 12:04:05
▶	● High	EPAS_12	Table size in server	410 MB					2020-04-09 15:53:51
▶	● Medium	EPAS_12	Last Vacuum	5.18 hrs					2020-04-27 20:47:50
▶	● High	EPAS_12	Database size in server	455 MB					2020-04-09 15:52:50
▶	● Medium	EPAS_12	Last AutoVacuum	5.16 hrs					2020-04-27 20:47:50
▶	● High	N/A	Alert Errors	3					2020-01-21 14:26:04
▶	● High	PGSQL12_Centos7_1	Server Down	1					2020-04-27 20:48:50
▶	● High	PGSQL12_Centos7_1	Last Vacuum	Never ran					2020-04-03 14:58:57
▶	● High	PGSQL12_Centos7_1	Last AutoVacuum	Never ran					2020-04-03 14:58:57
▶	● High	Postgres Enterprise Manager Server	Largest index by table-size percentage	100 %					2020-04-21 22:07:52
▶	● High	Postgres Enterprise Manager Server	Database size in server	2.072265625 GB					2020-02-05 18:26:49
▶	● High	Postgres Enterprise Manager Server	Table size in server	1.9814453125 GB					2020-02-20 11:29:45
▶	● Medium	Postgres Enterprise Manager Server	Connections in idle state	12					2020-04-27 16:20:32
▶	● Medium	Postgres Enterprise Manager Server	Last Vacuum	4.99 hrs					2020-04-27 20:47:50

Fig. 35: The Alert Status table

The PEM server includes a number of pre-defined alerts that are actively monitoring your servers. If the alert definition makes details available about the cause of the alert, you can click the down arrow to the right of the severity warning to access a dialog with detailed information about the condition that triggered the alert.

PEM also provides an interface that allows you to create customized alerts. Each alert uses metrics defined on an alert template. An alert template defines how the server will evaluate the statistics for a resource or metric. The PEM server includes a number of pre-defined alert templates, or you can create custom alert templates.

Alert Details (Auto-refresh paused whilst rows are expanded. ⓘ)

Ack'd	Alert Type	Name	Value	Agent	Server	Database	Schema	Package	Object	Alerting Since
☐	High	Table size in server	1.9814453125 GB		Postgres Enterprise Manager Server					2020-02-20 11:29:45

General Parameters

Table name	Schema name	Database name	Total table size(MB)
table_statistics	perhistory	pem	1087
server_logs	perdata	pem	263
index_statistics	perhistory	pem	237
session_info	perhistory	pem	137
lock_info	perhistory	pem	88

Fig. 36: Alert details

4.5.2 Viewing the alerts via Alerts dashboard

Use the Dashboards menu (on the Monitoring tab) to access the Alerts dashboard. The Alerts dashboard displays a summary of the active alerts and the status of each alert:

The Alerts Dashboard header displays the date and time that the dashboard was last updated, and the number of current alerts.

The Alerts Overview section displays a graphic representation of the active alerts, as well as a count of the current high, low and medium alerts. The vertical bar on the left of the graph provides the count of the alerts displayed in each column. Hover over a bar to display the alert count for the selected alert severity in the upper-right hand corner of the graph.

The Alert Details table provides a list of the alerts that are currently triggered. The entries are prioritized from high-severity to lower-severity; each entry includes information that will allow you to identify the alert and recognize the condition that triggered the alert. Click the name of an alert to review detailed information about the alert definition.

The Alert Errors table displays configuration-related errors (eg. accidentally disabling a required probe, or improperly configuring an alert parameter). You can use the information provided in the Error Message column to identify and resolve the conflict that is causing the error.

4.5.3 Customizing the Alerts dashboard

You can customize tables and charts that appear on the Alerts dashboard. To customize a table or chart, click the Settings icon located in the upper-right corner.

Use fields on the Personalize chart configuration dialog to provide your display preferences:

- Use the Auto Refresh field to specify the number of seconds between updates of the data displayed in the table or chart.
- If applicable, use the Download as field to indicate if you would like a chart to be downloaded as a JPEG image or a PNG image.
- If applicable, use the Colours selectors to specify the display colors that will be used on a chart.
- If applicable, set the Show Acknowledged Alerts switch to Yes indicate that you would like the table to display alerts that you have acknowledged with a checkbox in the Ack'd column. Set the field to No to indicate that the table should hide any acknowledged alerts. The switch acts as a toggle; acknowledged alerts are not purged from the table content until the time specified in the alert definition passes.

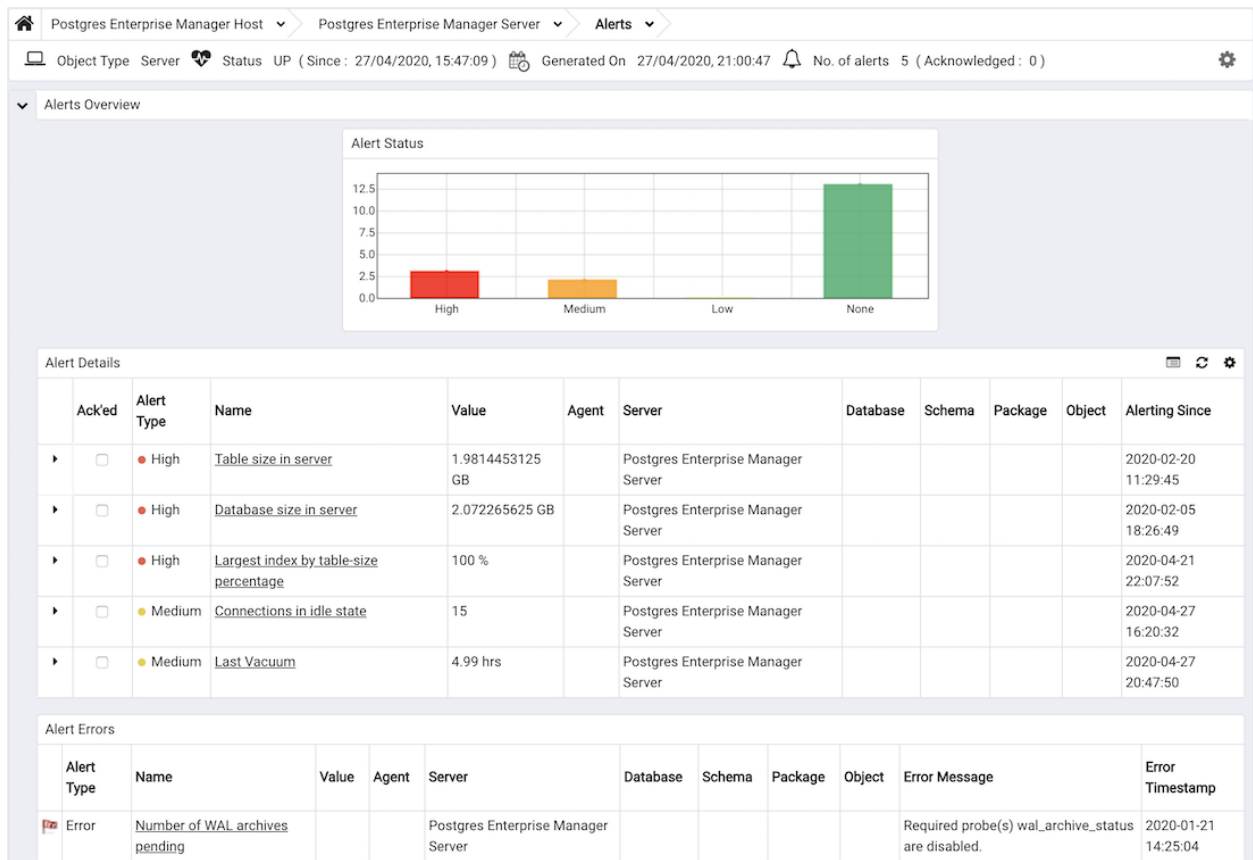


Fig. 37: The Alerts Dashboard

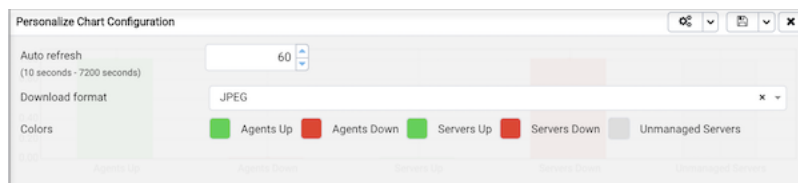


Fig. 38: Customizing a chart

To save your customizations, click the Save icon (a check mark) in the upper-right corner; to delete any previous changes and revert to the default values, click the Delete icon. The Save and Delete drop-down menus allow you to specify if your preferences should be applied to All Dashboards , or to a selected server or database.

4.5.4 Managing alerts

Use the PEM Client's Manage Alerts tab to define, copy, or manage alerts. To open the Manage Alerts tab, select Manage Alerts from the Management menu.

Quick Links

Copy Alerts

Alert Templates

Email Groups

Webhooks

Server Configuration

Help

Alerts

Manage Alerts

		Name	Auto created?	Template	Enable?	Interval		History retention		
						Default?	Minutes	Default?	Days	
☒		Average table bloat in server	☒	Average table bloat in server ▾	☒	☒		1	☒	30
☒		Connections in idle-in-transaction state	☒	Connections in idle-in-transactio... ▾	☒	☒		1	☒	30
☒		Connections in idle-in-transaction state, a...	☒	Connections in idle-in-transactio... ▾	☒	☒		1	☒	30
☒		Connections in idle state	☒	Connections in idle state ▾	☒	☒		1	☒	30
☒		Database size in server	☒	Database size in server ▾	☒	☒		1	☒	30
☒		Highest table bloat in server	☒	Highest table bloat in server ▾	☒	☒		1	☒	30
☒		Largest index by table-size percentage	☒	Largest index by table-size perce... ▾	☒	☒		1	☒	30
☒		Last AutoVacuum	☒	Last AutoVacuum ▾	☒	☒		1	☒	30
☒		Last Vacuum	☒	Last Vacuum ▾	☒	☒		1	☒	30

Fig. 39: The Manage Alerts tab

Use the Quick Links toolbar to open dialogs and tabs that will assist you when managing alerts:

- Click Copy Alerts to open the Copy Alert Configuration dialog and copy an alert definition.
- Click Alert Templates to open the Alert Template tab, and modify or create an alert template.
- Click Email Groups to open the Email Groups tab, and modify or create an email group.
- Click Webhooks to open the Webhooks tab, and create or manage the webhooks endpoints.
- Click Server Configurations to open the Server Configuration dialog and review or modify server configuration settings.
- Click Help to open the PEM online help in a new tab of the PEM web interface.

Use the table in the Alerts section of the Manage Alerts tab to create new alerts or manage existing alerts.

4.5.5 Alert templates

An alert template is a prototype that defines the properties of an alert. An alert instructs the server to compare the current state of the monitored object to a threshold (specified in the alert template) to determine if a situation exists that requires administrative attention.

You can use the **Alert Templates** tab to define a custom alert template or view the definitions of existing alert templates. To open the **Alert Templates** tab, select the **Manage Alerts...** menu option from the **Management** menu. When the **Manage Alerts** tab opens, select **Alert Templates** from the **Quick Links** toolbar.

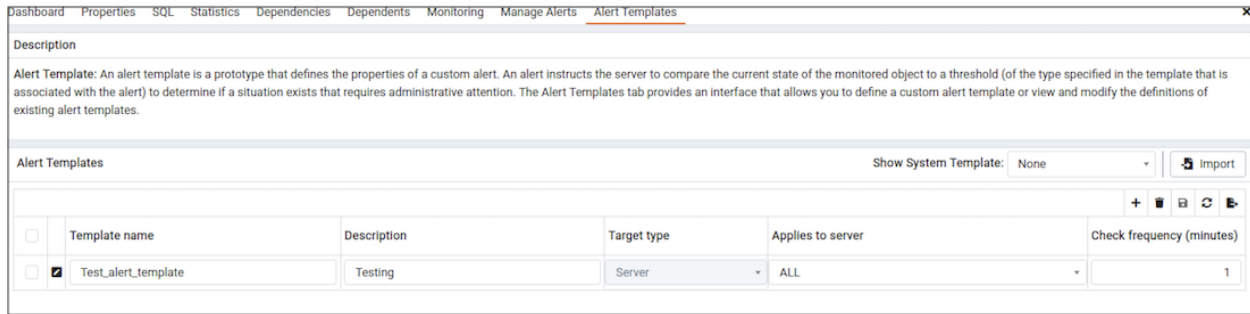


Fig. 40: The Alert Templates tab

Use the **Show System Template** drop-down listbox to filter the alert templates that are displayed in the **Alert Templates** table. Use the listbox to select a level of the PEM hierarchy to view all of the templates for the selected level.

Defining a New Alert Template

To define a new alert template, use the **Show System Template** drop-down listbox to select **None**, and click the **Add** icon (+) located in the upper-right corner of the alert template table. The alert template editor opens.

Use fields on the **General** tab to specify general information about the template:

- Use the **Template name** field to specify a name for the new alert template.
- Use the **Description** field to provide a description of the alert template.
- Use the **Target type** drop-down listbox to select the type of object that will be the focus of the alert.
- Use the **Applies to server** drop-down listbox to specify the server type (EDB Postgres Advanced Server or PostgreSQL) to which the alert will be applied; you can specify a single server type, or **ALL**.
- Use the **History retention** field to specify the number of days that the result of the alert execution will be stored on the PEM server.
- Use the **Threshold unit** field to specify the unit type of the threshold value.
- Use fields in the **Auto create** box to indicate if PEM should use the template to generate an automatic alert. If enabled, PEM will automatically create an alert when a new server or agent (as specified by the **Target type** drop-down listbox) is added, and delete that alert when the target object is dropped.
- Move the **Auto create?** slider to **Yes** to indicate that PEM should automatically create alerts based on the template. If you modify an existing alert template, changing the **Auto create?** slider from **No** to **Yes**, PEM will create alerts on the existing agents and servers. Please note that if you change the slider from **Yes** to **No**, the default threshold values in existing alerts will be erased, and cannot be recovered. - Use the **Operator** drop-down listbox to select the operator that PEM will use when evaluating the current system values.

Select a greater-than sign (>) to indicate that the alert should be triggered when the system values are greater than the values entered in the **Threshold values** fields.

The General tab contains the following fields and options:

- Template name:** A text input field with a red warning icon.
- Description:** A text input field with a red warning icon.
- Target type:** A dropdown menu currently set to "Server". Below it is a note: "Use the Target type field to select the type of object that will be the focus of the alert."
- Applies to server:** A dropdown menu currently set to "ALL". Below it is a note: "Use the Applies to server field to specify the server to which the alert will be applied; specify a single server type or ALL."
- History retention:** A numeric input field set to "30". Below it is a note: "Use the History retention field to specify the number of days that the result of the alert execution will be stored on the PEM server."
- Threshold unit:** A text input field. Below it is a note: "Use the Threshold unit field to specify the unit type of the threshold value."
- Auto create:** A section containing:
 - Auto create?:** A toggle switch currently set to "No". Below it is a note: "Use the Auto create field to automatically create alerts using this template. Please provide default threshold values. If the value is 'Yes' then all the added parameters in Parameters tab will be removed as we do not support parametrised auto alerts."
 - Operator:** A dropdown menu set to ">". To its right are three threshold value input fields labeled "Low", "Med", and "High".
- Check frequency (minutes):** A numeric input field set to "1". Below it is a note: "Use the Check frequency field to specify the number of minutes between alert executions. This value specifies how often the server will invoke the SQL code specified on the SQL tab and compare the result to the threshold value specified in the alert definition."

Fig. 41: The General tab

Select a less-than sign (<) to indicate that the alert should be triggered when the system values are less than the values entered in the Threshold values fields.

- Use the threshold fields to specify the values that PEM will compare to the system values to determine if an alert should be raised. Please note that you must specify values for all three thresholds (Low, Medium, and High):

Enter a value that will trigger a low-severity alert in the Low field.

Enter a value that will trigger a medium-severity alert in the Medium field.

Enter a value that will trigger a high-severity alert in the High field.

- Use the Check frequency field to specify the default number of minutes between alert executions. This value specifies how often the server will invoke the SQL code specified in the definition and compare the result to the threshold value specified in the template.

The Probe Dependency tab contains the following elements:

- Probes:** A listbox showing a list of available probes.
- Select probe from list:** A dropdown menu.
- +** An Add button.
- Table:** A table with two columns: "Display name" and "Internal name".

Fig. 42: The Probe Dependency tab of the Alert Templates dialog

Use the fields on the Probe Dependency tab to specify the names of probes referred to in the SQL query specified on the SQL tab:

- Use the Probes drop-down listbox to select from a list of the available probes; highlight a probe name, and click the Add button to add the probe to the list of probes used by the alert template. To remove a probe from the selected probes list, highlight the probe name, and click the Delete icon.

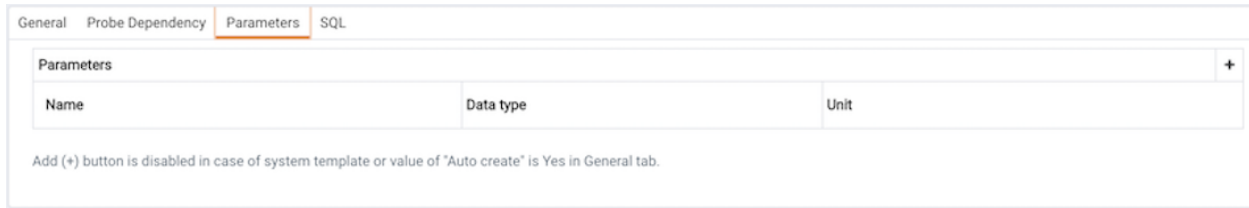


Fig. 43: The Parameters tab of the Alert Templates dialog

- Use fields on the **Parameters** tab to define the parameters that will be used in the SQL code specified on the **SQL** tab. Click the Add icon (+) and:

Use the **Name** field to specify the parameter name.

Use the **Data type** drop-down listbox to specify the type of parameter.

Use the **Unit** field to specify the type of unit specified by the parameter.

- Use the **Code** field on the **SQL** tab to provide the text of the SQL query that the server will invoke when executing the alert. The SQL query will provide the result against which the threshold value is compared; if the alert result deviates from the specified threshold value, an alert will be raised.



Fig. 44: The SQL tab of the Alert Templates dialog

Within the query, parameters defined on the **Parameters** tab should be referenced sequentially by the variable `param_x`, where `x` indicates the position of the parameter definition within the parameter list. For example, `param_1` refers to the first parameter in the parameter list, `param_2` refers to the second parameter in the parameter list, and so on.

The query can also include the following pre-defined variables:

Variable Description	Variable Name
agent identifier	<code>'\${agent_id}'</code>
server identifier	<code>'\${server_id}'</code>
database name	<code>'\${database_name}'</code>
schema name	<code>'\${schema_name}'</code>
Table	<code>'\${object_name}'</code>
index	<code>'\${object_name}'</code>
sequence	<code>'\${object_name}'</code>
function name	<code>'\${object_name}'</code>

- Use the **Detailed Information** SQL field to provide a SQL query that will be invoked if the alert is triggered. The result set of the query may be displayed as part of the detailed alert information on the **Alerts** dashboard or **Global Overview** dashboard.

Note: If the specified query is dependent on one or more probes from different levels within the PEM hierarchy (server, database, schema, etc.), and a probe becomes disabled, any resulting alerts will be displayed as follows:

- If the alert definition and the probe referenced by the query are from the same level within the PEM hierarchy, the server will display any alerts that reference the alert template on the **Alert Error** table of the **Global Alert** dashboard.
- If the alert definition and the probe referenced by the query are from different levels of the PEM hierarchy, the server will display any triggered alerts that reference the alert template on the **Alert Details** table of the hierarchy on which the alert was defined.

Click the **Save** icon to save the alert template definition and add the template name to the Alert Templates list. After saving a custom alert template, you can use the **Alerting** dialog to define an alert based on the template.

Exporting/Importing Alert Templates

To **Export** the Alert Template, select any alert template from the **Alert Templates** tab and then select the **Export** icon in the upper-right corner of the table. Select **Save File** option and then select **ok** , it will generate the JSON file.

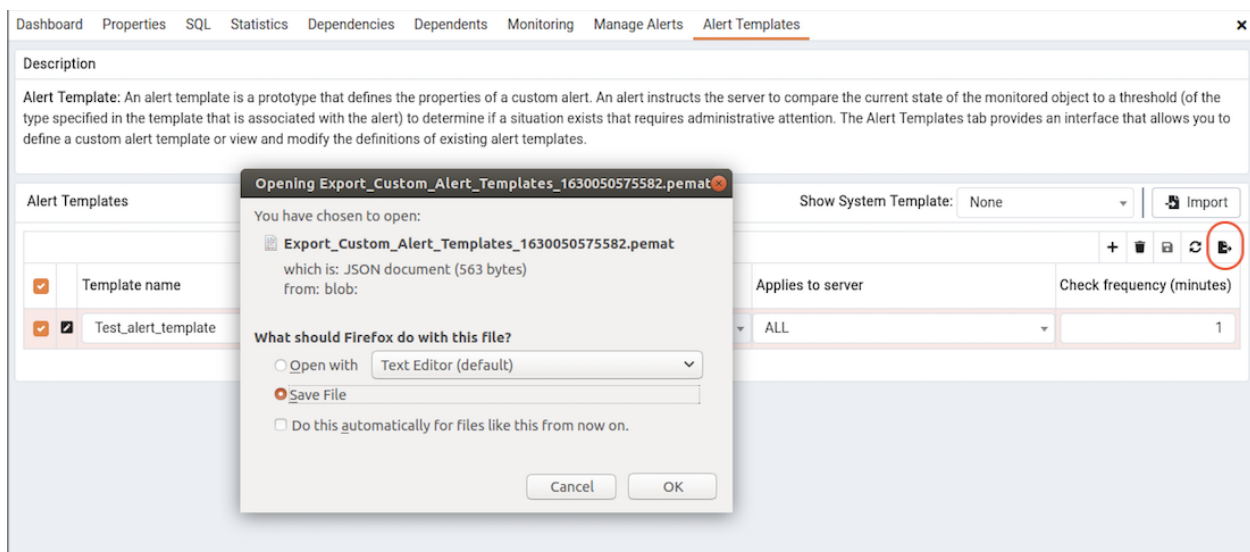


Fig. 45: Alert Templates Export

To **Import** the Alert Template, go to the **Alert Templates** tab and then select the **Import** icon in the upper-right corner.

Click on the **Browse** button to select the JSON file with the code to be imported and then click **Import** .

After selecting the file to import, you can select the following checkboxes:

- **skip exiting** - If you select this checkbox then it will skip the alert template if it already exists.
- **skip existing dependent probe** - The alert templates are dependent on probes. If you select this checkbox then it will skip the dependent probe if it already exists.

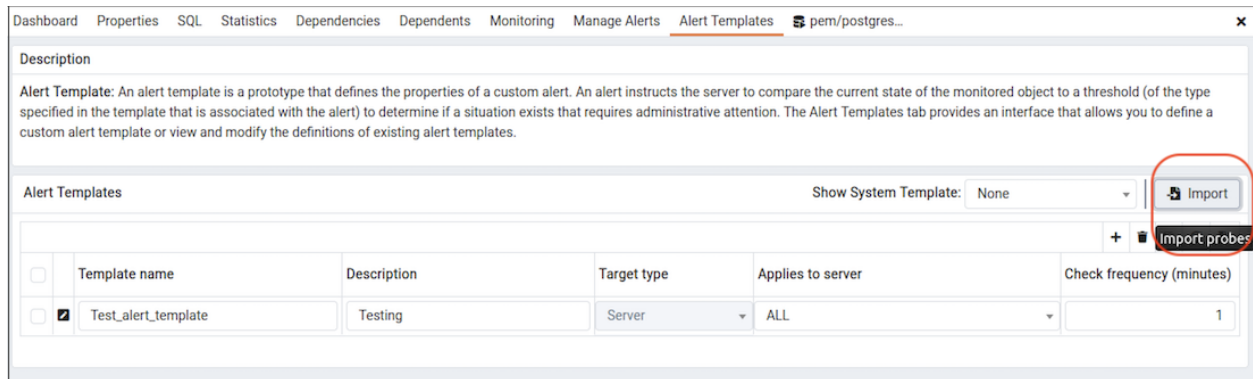


Fig. 46: Alert Templates Import

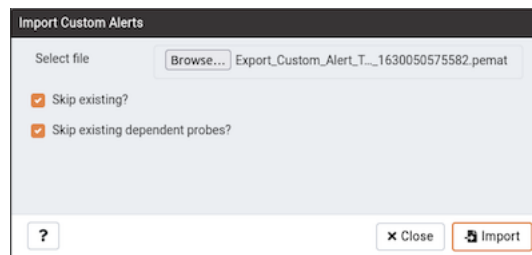


Fig. 47: Alert Templates Import Browse

If both the checkboxes are selected and the alert template already exists, then it skips importing the alert template with below message:

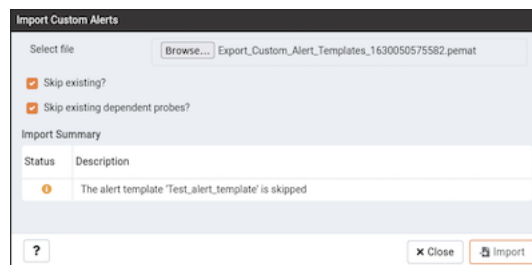


Fig. 48: Alert Templates Skip Both

If the **skip existing** checkbox is not selected and **skip dependent probe** is selected and the alert template already exists, then it will import the alert template successfully as below:

If both the checkboxes are not selected and the alert template does not exist, then it will successfully import the alert template as below:

Modifying or Deleting an Alert Template

To view the definition of an existing template (including PEM pre-defined alert templates), use the **Show System Template** drop-down listbox to select the type of object monitored. When you select the object type, the **Alert Templates** table will display the currently defined alert templates that correspond with that object type.

Highlight a Template Name in the list, and click the **Edit** icon (at the left end of the row) to review the template definition.

Use the tabs on the **Alert Templates** dialog to view detailed information about the alert template:

- General information is displayed on the **General** tab.

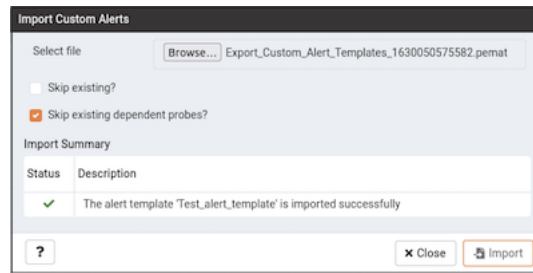


Fig. 49: Alert Templates Skip Dependent Probe

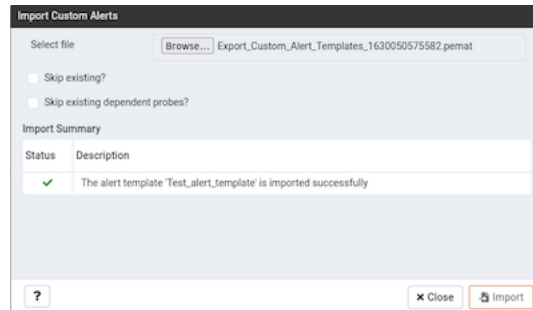


Fig. 50: Alert Template Import Successful

- The names of probes that provide data for the template are listed on the Probe Dependency tab.
- The names of any parameters referred to in the SQL code are listed on the Parameters tab.
- The SQL code that defines the behavior of the alert is displayed on the SQL tab.

To delete an alert template, select the template name in the alert templates table, and click the **Delete** icon (located to the upper-right corner of the table). The alert history will persist for the length of time specified on the **History Retention** field in the template definition.

4.5.6 Audit log alerting

PEM provides alert templates that allow you to use the **Alerting** dialog to create an alert that will trigger when an **ERROR** or **WARNING** statement is written to a log file for a specific server or agent. To open the **Alerting** dialog, highlight the name of the server or agent in the PEM client Object browser tree control, and select **Alerting...** from the **Management** menu.

To create an alert that will notify you of **ERROR** or **WARNING** messages in the log file for a specific server, create an alert that uses one of the following alert templates:

Number of **ERRORS** in the logfile on server **M** in last **X** hours

Number of **WARNINGS** in the logfile on server **M** in last **X** hours

Number of **ERRORS** or **WARNINGS** in the logfile on server **M** in last **X** hours

To create an alert that will notify you of **ERROR** or **WARNING** messages for a specific agent, create an alert that uses one of the following alert templates:

Number of **ERRORS** in the logfile on agent **M** in last **X** hours

Number of **WARNINGS** in the logfile on agent **M** in last **X** hours

Number of **ERRORS** or **WARNINGS** in the logfile on agent **M** in last **X** hours

Please note that this functionality is supported only on Advanced Server.

4.5.7 Alerts

Use the PEM Client's **Manage Alerts** tab to define, copy, or manage alerts. To open the **Manage Alerts** tab, select **Manage Alerts** from the **Management** menu.

Defining a New Alert

The **Manage Alerts** tab displays a table of alerts that are defined on the object currently selected in the PEM client tree control. You can use the **Alerts** table to modify an existing alert, or to create a new alert.

Quick Links

Copy Alerts

Alert Templates

Email Groups

Webhooks

Server Configuration

Help

Alerts

Manage Alerts

					Interval		History retention		
	Name	Auto created?	Template	Enable?	Default?	Minutes	Default?	Days	
☒	Average table bloat in server	Yes	Average table bloat in server	Yes	Yes		1	Yes	30
☒	Connections in idle-in-transaction state	Yes	Connections in idle-in-transactio...	Yes	Yes		1	Yes	30
☒	Connections in idle-in-transaction state, a...	Yes	Connections in idle-in-transactio...	Yes	Yes		1	Yes	30
☒	Connections in idle state	Yes	Connections in idle state	Yes	Yes		1	Yes	30
☒	Database size in server	Yes	Database size in server	Yes	Yes		1	Yes	30
☒	Highest table bloat in server	Yes	Highest table bloat in server	Yes	Yes		1	Yes	30
☒	Largest index by table-size percentage	Yes	Largest index by table-size perce...	Yes	Yes		1	Yes	30
☒	Last AutoVacuum	Yes	Last AutoVacuum	Yes	Yes		1	Yes	30
☒	Last Vacuum	Yes	Last Vacuum	Yes	Yes		1	Yes	30

Fig. 51: The Manage Alerts tab

To open the alert editor and create a new alert, click the Add icon (+) in the upper-right corner of the table. The editor opens as shown below.

Use the fields on the **General** tab to provide information about the alert:

- Enter the name of the alert in the **Name** field.
- Use the drop-down listbox in the **Template** field to select a template for the alert. An alert template is a function that uses one (or more) metrics or parameters to generate a value to which PEM compares user-specified alert boundaries. If the value returned by the template function evaluates to a value that is within the boundary of a user-defined alert (as specified by the **Operator** and **Threshold** values fields), PEM raises an alert, adds a notice to the Alerts overview display, and performs any actions specified on the template.
- Use the **Enable?** switch to specify if the alert is enabled (Yes) or disabled (No).
- Use the controls in the **Interval** box to specify how often the alert should confirm if the alert conditions are satisfied. Use the **Minutes** selector to specify an interval value. Use the **Default** switch to set or reset the **Minutes** value to the default (recommended) value for the selected template.
- Use controls in the **History retention** box to specify the number of days that PEM will store data collected by the alert. Use the **Days** selector to specify the number of days that the data will be stored. Use the **Default** switch to set or reset the **Days** value to the default value (30 days).

GeneralNotificationScript execution

Name

Description

Template

Enable?

Interval

History retention

Threshold values

Auto created?

Parameter Options

Select from the list

Yes

Default?YesMinutes1

Use fields in the Interval box to specify how often the alert should confirm that alert conditions are satisfied.

Default?YesDays30

Use fields in the History retention box to specify the number of days that PEM will store data collected by the alert.

Operator>LowMediumHighUnit

The fields in the Threshold values box work together to define the triggering criteria for the alert.

Auto created?No

Name	Value
server	Postgres Enterprise Manager Server

Fig. 52: The General tab of the alert editor

- Use controls in the **Threshold values** box to define the triggering criteria for the alert. When the value specified in the Threshold Values fields evaluates to greater-than or less-than the system value (as specified with the Operator), PEM will raise a Low, Medium or High level alert:
- Use the **Operator** drop-down listbox to select the operator that PEM will use when evaluating the current system values:
 - Select a greater-than sign (>) to indicate that the alert should be triggered when the system values are greater than the values entered in the Threshold values fields.
 - Select a less-than sign (<) to indicate that the alert should be triggered when the system values are less than the values entered in the Threshold values fields.
- Use the **threshold** fields to specify the values that PEM will compare to the system values to determine if an alert should be raised. Please note that you must specify values for all three thresholds (Low, Medium, and High):
 - Enter a value that will trigger a low-severity alert in the **Low** field.
 - Enter a value that will trigger a medium-severity alert in the **Medium** field.
 - Enter a value that will trigger a high-severity alert in the **High** field.

The **Parameter Options** table contains a list of parameters that are required by the selected template; the table displays both pre-defined parameters, and parameters for which you must specify a value. Please note that you must specify a value for any parameter that displays a prompt in the **Value** column.

PEM can send a notification or execute a script if an alert is triggered, or if an alert is cleared. Use the **Notification** tab to specify how PEM will behave if an alert is raised.

General Notification Script execution

Email Webhook SNMP Nagios

To configure notification for an alert use the below fields to specify one or multiple user group that will receive an email notification if the alert is triggered at the specific level. Use the dropdown list box to select pre-defined group that will be sent an alert of the selected level is triggered. Please note that you must configure the PEM Server to use an SMTP server to deliver email before PEM can send email notifications.

Alert types

All alerts?	No	<Default>
Low alerts?	No	<Default>
Medium alerts?	No	<Default>
High alerts?	No	<Default>

Fig. 53: The alert editor Notification tab

Use the fields in the **Email notification** box to specify the Email group that will receive an email notification if the alert is triggered at the specified level. Use the **Email Groups** tab to create an email group that contains the address of the user or users that will be notified when an alert is triggered. To access the **Email Groups** tab, click the **Email Groups** icon located in the **Quick Links** menu of the **Manage Alerts** tab.

- To instruct PEM to send an email when a specific alert level is reached, set the slider next to an alert level to Yes, and use the drop-down listbox to select the pre-defined user or group that will be notified.

Please note that you must configure the PEM Server to use an SMTP server to deliver email before PEM can send email notifications.

Use the **Webhook notification** box to specify one or multiple endpoints if the alert is triggered at the specified level. Use the

Fig. 54: The alert editor Notification webhook tab

webhooks tab to create a webhook endpoint that will receive the notifications when an alert is triggered. To access the Webhooks tab, click the Webhooks icon located in the Quick Links menu of the Manage Alerts tab.

- Set the Enable? to Yes to send the alert notifications to the webhook endpoint.
- Set the Override default configuration? to Yes to set the customized alert levels as per the requirement. Once it is set to Yes all the alert levels are enabled to configure.
- Use the dropdown to select a pre-defined endpoint that will be sent a notification for Low alerts? , Medium alerts? , High alerts? and Cleared alerts? .

Fig. 55: The alert editor Notification SNMP tab

Use the Trap notification options to configure trap notifications for this alert:

- Set the Send trap slider to Yes to send SNMP trap notifications when the state of this alert changes.
- Set the SNMP Ver to v1 , v2 , or v3 to identify the SNMP version.

- Use the **Low alert** , **Med alert** and **High alert** sliders to select the level(s) of alert that will trigger the trap. For example, if you set the slider next to **High alert** to **Yes**, PEM will send a notification when an alert with a high severity level is triggered.

Please note that you must configure the PEM Server to send notifications to an SNMP trap/notification receiver before notifications can be sent. For sending SNMP v3 traps, pemAgent will use 'User Security Model(USM)' which is in charge of authenticating, encrypting, and decrypting SNMP packets.

Also note while sending SNMP v3 traps, agent will create snmp_boot_counter file. This file will get created in location mentioned by batch_script_dir parameter in agent.cfg, if this parameter is not configured or if directory is not accessible due to authentication restrictions then in operating systems temporary directory, if that is also not possible then in user's home directory.

Fig. 56: The alert editor Notification Nagios tab

Use the field in the **Nagios notification** box to instruct the PEM server to notify Nagios network-alerting software when the alert is triggered or cleared. For more details see [Using PEM with Nagios](#)

- Set the **Submit passive service check result to Nagios** switch to **Yes** to instruct the PEM server to notify Nagios when the alert is triggered or cleared.

Use the fields in the **Script execution** box to (optionally) define a script that will be executed if an alert is triggered, and to specify details about the script execution.

- Set the **Execute script** slider to **Yes** to instruct PEM to execute the provided script if an alert is triggered.
- Set the **Execute on alert cleared** slider to **Yes** to instruct PEM to execute the provided script when the situation that triggered the alert has been resolved.
- Use the radio buttons next to **Execute script** on to indicate that the script should execute on the PEM Server or the Monitored Server.
- Provide the script that PEM should execute in the **Code** field. You can provide a batch/shell script, or SQL code. Within the script, you can use placeholders for the following:

%AlertName% - this placeholder will be replaced with the name of the triggered alert.

%ObjectName% - this placeholder will be replaced with the name of the server or agent on which the alert was triggered.

%ThresholdValue% - this placeholder will be replaced with the threshold value reached by the metric when the alert triggered.

%CurrentValue% - this placeholder will be replaced with the current value of the metric that triggered the alert.

General
Notification
Script execution

Script execution

Execute script?

No

Execute on alert cleared?

No

Execute script on

☐ PEM Server
☒ Monitored Server

Code

Use the fields in the Script execution box to (optionally) define a script that will be executed if an alert is triggered, and to specify details about the script execution.

- Set the Execute script slider to Yes to instruct PEM to execute the provided script if an alert is triggered.
- Set the Execute on alert cleared slider to Yes to instruct PEM to execute the provided script when the situation that triggered the alert has been resolved.
- Use the selector to indicate if the script should execute on the PEM Server or the Monitored Server.
- Provide the script that PEM should execute in the Code field. You can provide a batch/shell script, or SQL code. Within the script you can use the placeholders to replace the following:
 - %AlertID% - the id of the triggered alert.
 - %AlertName% - the name of the triggered alert.
 - %ObjectName% - the name of the server or agent on which the alert was triggered.
 - %ObjectType% - the type on which alert was generated.
 - %ThresholdValue% - the threshold value reached by the metric when the alert triggered.
 - %CurrentValue% - the current value of the metric that triggered the alert.
 - %CurrentState% - the current state of the alert.
 - %OldState% - the previous state of the alert.
 - %AlertRaisedTime% - the time that the alert was raised, or the most recent time that the alert state was changed.
 - %AgentID% - the id of the agent by which alert was generated.
 - %AgentName% - the name of the agent by which alert was generated.
 - %ServerID% - the id of the server on which alert was generated.
 - %ServerName% - the name of the server on which alert was generated.
 - %ServerIP% - the ip or address of the server on which alert was generated.
 - %ServerPort% - the the port of the server on which alert was generated.
 - %DatabaseName% - the name of the database on which alert was generated.
 - %SchemaName% - the name of the schema on which alert was generated.
 - %PackageName% - the name of the package on which alert was generated.
 - %DatabaseObjectName% - the name of the database object name like table name, function name etc on which alert was generated.
 - %Parameters% - the list of custom parameters used to generate the alert.

Fig. 57: The alert editor script execution tab

%CurrentState% - this placeholder will be replaced with the current state of the alert.

%OldState% - this placeholder will be replaced with the previous state of the alert.

%AlertRaisedTime% - this placeholder will be replaced with the time that the alert was raised, or the most recent time that the alert state was changed.

To invoke a script on a Linux system, you must modify the entry for the `batch_script_user` parameter of the `agent.cfg` file and specify the user that should be used to run the script. You can either specify a non-root user or root for this parameter. If you do not specify a user, or the specified user does not exist, then the script will not be executed. Restart the agent after modifying the file.

To invoke a script on a Windows system, set the registry entry for `AllowBatchJobSteps` to true and restart the PEM agent. PEM registry entries are located in `HKEY_LOCAL_MACHINE/Software/Wow6432Node/EnterpriseDB/PEM/agent`.

When you have defined the alert attributes, click the edit icon to close the alert definition editor, and then the save icon (in the upper-right corner of the **Alerts** table). To discard your changes, click the refresh icon; a popup will ask you to confirm that you wish to discard the changes.

Note: Suppose you need to use the alert configuration placeholder values in an external script. You can do it either by passing them as the command-line arguments or exporting them as environment variables. Please note that the external script must have proper execution permissions.

- You can run the script with any of the placeholders as command-line argument.

For eg:

```
#!/bin/bash

bash <path_to_script>/script.sh "%AlertName% %AlertLevel% %AlertDetails%"
```

- You can define the environment variables for any of the placeholders and then use those environment variables in the script.

For eg:

```
#!/bin/bash

export AlertName=%AlertName%
export AlertState=%AlertState%

bash <path_to_script>/script.sh
```

Modifying an Alert

Use the **Alerts** table to manage an existing alert or create a new alert. Highlight an object in the PEM client tree control to view the alerts that monitor that object.

You can modify some properties of an alert in the **Alerts** table:

- The **Alert name** column displays the name of the alert; to change the alert name, simply replace the name in the table, and click the save icon.
- The **Alert template** column displays the name of the alert template that specifies properties used by the alert. You can use the drop-down listbox to change the alert template associated with an alert.
- Use the **Alert enable?** switch to specify if an alert is enabled (Yes) or disabled (No).

Alerts									
	Name	Auto created?	Template	Enable?	Interval		History retention		
					Default?	Minutes	Default?	Days	
☒	Audit config mismatch	☒	Audit config mismatch	☒	☒		1	☒	30
☒	Average table bloat in server	☒	Average table bloat in server	☒	☒		1	☒	30
☒	Connections in idle-in-transaction state	☒	Connections in idle-in-transactio...	☒	☒		1	☒	30
☒	Connections in idle-in-transaction state, as a ...	☒	Connections in idle-in-transactio...	☒	☒		1	☒	30
☒	Connections in idle state	☒	Connections in idle state	☒	☒		1	☒	30
☒	Database size in server	☒	Database size in server	☒	☒		1	☒	30
☒	Highest table bloat in server	☒	Highest table bloat in server	☒	☒		1	☒	30
☒	Largest index by table-size percentage	☒	Largest index by table-size perc...	☒	☒		1	☒	30
☒	Last AutoVacuum	☒	Last AutoVacuum	☒	☒		1	☒	30
☒	Last Vacuum	☒	Last Vacuum	☒	☒		1	☒	30
☒	Log config mismatch	☒	Log config mismatch	☒	☒		1	☒	30
☒	Number of prepared transactions	☒	Number of prepared transactions	☒	☒		1	☒	30
☒	Number of WAL archives pending	☒	Number of WAL archives pending	☒	☒		1	☒	30
☒	Number of WAL files	☒	Number of WAL files	☒	☒		1	☒	30
☒	Server Down	☒	Server Down	☒	☒		1	☒	30
☒	Table_Size_Alerts	☐	Table size in server	☒	☒		1	☒	30
☒	Table size in server	☒	Table size in server	☒	☒		1	☒	30
☒	Total connections	☒	Total connections	☒	☒		1	☒	30
☒	Total connections as percentage of max_con...	☒	Total connections as percentag...	☒	☒		1	☒	30
☒	Total table bloat in server	☒	Total table bloat in server	☒	☒		1	☒	30

Fig. 58: The Alerts table

- Use the **Interval** column to specify how often PEM should check to see if the alert conditions are satisfied. Set the **Default** switch to **No** and specify an alternate value (in Minutes), or return the **Default** switch to **Yes** to reset the value to its default setting. By default, PEM will check the status of each alert once every minute.
- Use the **History retention** field to specify the number of days that PEM will store data collected by the alert. Set the **Default** switch to **No** and specify an alternate value (in Days), or return the **Default** switch to **Yes** to reset the value to its default setting. By default, PEM will recommend storing historical data for 30 days.

After modifying an alert, click the save icon (located in the upper-right corner of the table) to make your changes persistent.

Click the edit icon to the left of an alert name to open an editor that provides access to the complete alert definition to modify other alert attributes.

Alert Details (Auto-refresh paused whilst rows are expanded. ⓘ)

Ack'd	Alert Type	Name	Value	Agent	Server	Database	Schema	Package	Object	Alerting Since
☐	High	Table size in server	1.9814453125 GB		Postgres Enterprise Manager Server					2020-02-20 11:29:45

General Parameters

Table name	Schema name	Database name	Total table size(MB)
table_statistics	pemhistory	pem	1087
server_logs	pemdata	pem	263
index_statistics	pemhistory	pem	237
session_info	pemhistory	pem	137
lock_info	pemhistory	pem	88

Fig. 59: The Alert details dialog

Use fields on the **Alert details** dialog to modify the definition of the selected alert. When you've finished modifying the alert definition, click **Save** to preserve your changes, or **Cancel** to exit the dialog without saving any changes.

Deleting an Alert

To mark an alert for deletion, highlight the alert name in the Alerts table and click the delete icon to the left of the name; the alert will remain in the list, but in red strike-through font.

The delete icon acts as a toggle; you can undo the deletion by clicking the delete icon a second time; when you click the **Save** icon, the alert definition will be permanently deleted.

Copying an Alert

To speed up the deployment of alerts in the PEM system, you can copy alert definitions from one object to one or more target objects.

To copy alerts from an object, highlight the object in the PEM client tree control on the main PEM window, and select the **Copy Alerts...** option from the **Management** menu. When the **Manage Alerts** tab opens, click the **Copy Alerts** icon (located in the **Quick Links** toolbar) to open the **Copy Alert Configuration** dialog.

The **Copy Alert Configuration** dialog copies all alerts from the object highlighted in the PEM client tree control to the object or objects selected on the dialog. Expand the tree control to select a node or nodes to specify the target object(s). The tree control displays a red warning indicator next to the source object.

To copy alerts to multiple objects at once, select a parent node of the target(s). For example, to copy the alerts from one table to all tables in a schema, you can simply select the checkbox next to the schema. PEM will only copy alerts to targets that are of the same type as the source object.

Check the **Ignore duplicates** radio button to prevent PEM from updating any existing alerts on the target objects with the same name as those being copied. Use the **Replace duplicates** option to replace existing alerts with alerts

Alerts

	Name	Auto created?	Template	Enable?	Interval		History retention	
					Default?	Minutes	Default?	Days
☒	Audit config mismatch	☒	Audit config mismatch	☒	☒	1	☒	30
☒	Average table bloat in server	☒	Average table bloat in server	☒	☒	1	☒	30
☒	Connections in idle-in-transaction state	☒	Connections in idle-in-transactio...	☒	☒	1	☒	30
☒	Connections in idle-in-transaction state, as a ...	☒	Connections in idle-in-transactio...	☒	☒	1	☒	30
☒	Connections in idle state	☒	Connections in idle state	☒	☒	1	☒	30
☒	Database size in server	☒	Database size in server	☒	☒	1	☒	30
☒	Highest table bloat in server	☒	Highest table bloat in server	☒	☒	1	☒	30
☒	Largest index by table-size percentage	☒	Largest index by table-size perc...	☒	☒	1	☒	30
☒	Last AutoVacuum	☒	Last AutoVacuum	☒	☒	1	☒	30
☒	Last Vacuum	☒	Last Vacuum	☒	☒	1	☒	30
☒	Log config mismatch	☒	Log config mismatch	☒	☒	1	☒	30
☒	Number of prepared transactions	☒	Number of prepared transactions	☒	☒	1	☒	30
☒	Number of WAL archives pending	☒	Number of WAL archives pending	☒	☒	1	☒	30
☒	Number of WAL files	☒	Number of WAL files	☒	☒	1	☒	30
☒	Server Down	☒	Server Down	☒	☒	1	☒	30
☒	Table_Size_Alerts	☐	Table-size-in-server	☒	☒	1	☒	30
☒	Table size in server	☒	Table size in server	☒	☒	1	☒	30
☒	Total connections	☒	Total connections	☒	☒	1	☒	30
☒	Total connections as percentage of max_con...	☒	Total connections as percentag...	☒	☒	1	☒	30
☒	Total table bloat in server	☒	Total table bloat in server	☒	☒	1	☒	30

Fig. 60: Deleting an alert

Copy Alert Configuration from EPAS_12

Select objects to copy alert configuration:

Agents

PEM Agent on Remote Host

Postgres Enterprise Manager Host

☒ Ignore duplicates

☐ Replace duplicates

?

Cancel

Configure Alerts

Fig. 61: The Copy Alert Configuration dialog

of the same name from the source object.

Click the **Configure Alerts** button to proceed to copy the alerts from the source object to all objects of the same type in, or under those objects selected on the **Copy Alert Configuration** dialog.

4.5.8 Schedule an alert blackout

You can use the **Schedule Alert Blackout** option on the **Management** menu to schedule an alert blackout for your Postgres servers and PEM Agents during maintenance. Alerts will not be raised during a defined blackout period.

To schedule an alert blackout, click on the **Management** menu and select **Schedule Alert Blackout**.

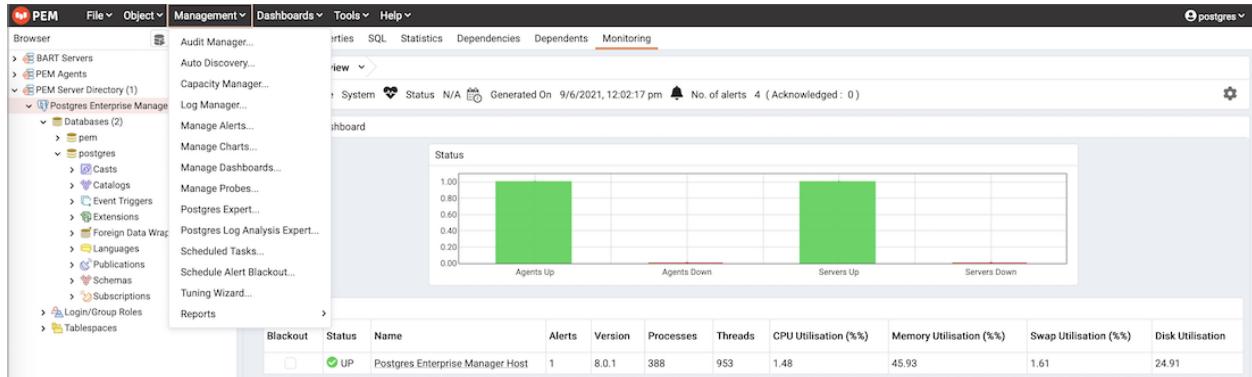


Fig. 62: PEM Management Menu

When the **Schedule Alert Blackout** dialog opens, use the tabs on the dialog to define the blackout period for servers and agents. Open the **Server** tab and click the **Add** icon (+) at the top right corner to add new row.

Use the fields on the **Server** tab to provide information about an alert blackout period:

- Use the **Start time** field to provide the date and time to start the alert blackout.
- Use the **Duration** field to provide the interval for which you want to blackout the alerts.
- Use the **Servers** field to provide the server name for which you want to blackout the alerts. You can also select multiple servers to blackout the alerts for those servers simultaneously.

After providing details, you can save the details by clicking on **Save** button on the right bottom corner of the dialog. Once saved, it cannot be edited. The alerts will not be displayed on the **Alerts** dashboard for the scheduled interval of that particular server.

You can also schedule a blackout period for PEM Agents via the **Agent** tab on the dialog. Open the **Agent** tab and click the **Add** icon (+) at the top right corner to add new row.

Use the fields on the **Agent** tab to provide the information about an alert blackout period:

- Use the **Start time** field to provide the date and time to start the alert blackout.
- Use the **Duration** field to provide the interval for which you want to blackout the alerts.
- Use the **Agents** field to provide the Agent name for which you want to blackout the alerts. All server level alerts, for the servers bound to that particular agent will blackout.

After providing details, you can save the details by clicking on **Save** button on the right bottom corner of the dialog. Once saved, it cannot be edited. The alerts will not be displayed on the **Alert** dashboard for the scheduled interval for that PEM agent.

Schedule Alert Blackout

Server Agent

Schedule Blackouts

☐	Start time	Duration	Servers
☐	2020-09-18 01:20 -07:00	1 hour	Postgres Enterprise Manager Server
☐	2020-09-30 23:27 -07:00	6 hours	Postgres Enterprise Manager Server
☒	2020-09-28 23:27 -07:00	4 hours	Postgres Enterprise Manager Server

? Cancel Reset Save

Fig. 63: Schedule Alert Blackout - Server tab

Schedule Alert Blackout

Server Agent

Schedule Blackouts

☐	Start time	Duration	Agents
☐	2020-09-18 03:33 -07:00	1 hour	Postgres Enterprise Manager Host
☐	2020-09-25 03:33 -07:00	4 hours	Agent2
☐	2020-09-30 03:33 -07:00	23 hours	Postgres Enterprise Manager Host
☒	2020-09-21 23:23 -07:00	6 hours	Agent2

? Cancel Reset Save

Fig. 64: Schedule Alert Blackout - Agent tab

You can use Clone button from the top right corner of dialog, to clone the scheduling of alert blackout. Select the servers or agents you want to clone and then click on Clone button to create the cloned copy of all the selected servers or agents. You can edit newly created schedules as needed, and then click Save .

You can use Delete button from the top right corner of dialog to remove a scheduled alert blackout. Select the servers or agents and then click on highlighted Delete button in the right top corner to remove the scheduled alerts associated with that server or agent.

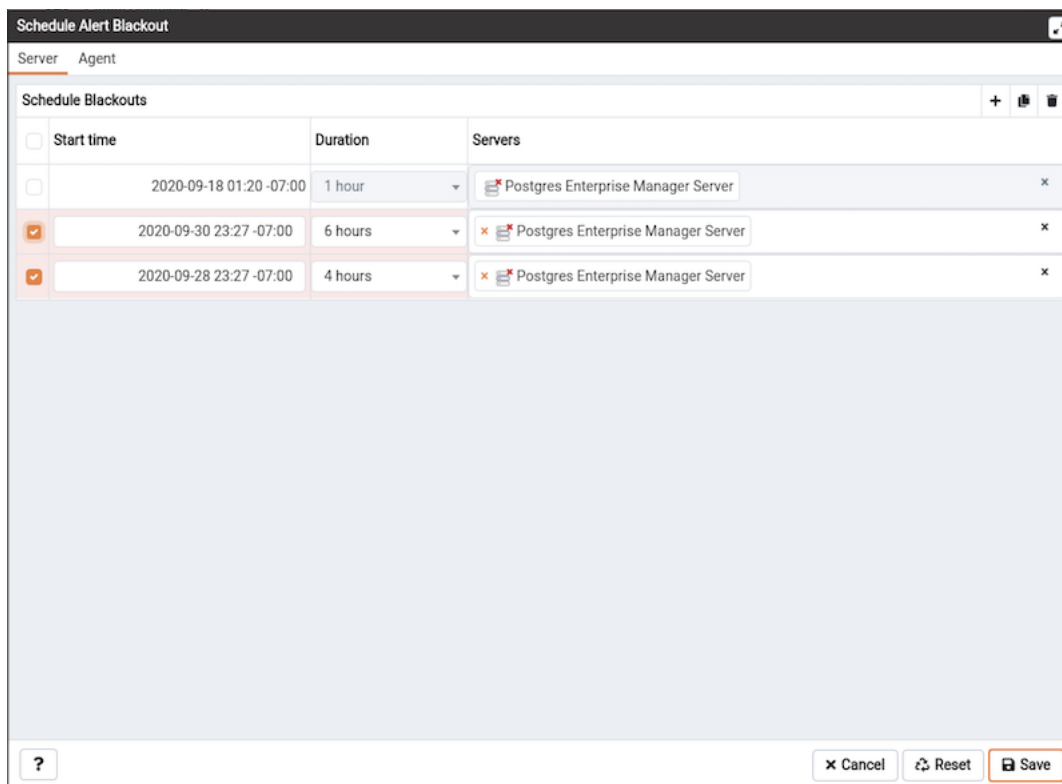


Fig. 65: Schedule Alert Blackout - Select servers

Select a server for which you wish to delete the scheduled alert backout and then click on the Delete button. The server will ask for confirmation before deleting that row.

You can use the Reset button to reset the details on the Alert Blackout dialog to the default settings. Please note that all saved blackouts will remain unaffected after resetting the current dialog values.

4.6 Notifications

PEM can send a notification or execute a script if an alert is triggered, or if an alert is cleared. The Notifications can be send via following options:

- SMTP
- Webhooks
- SNMP
- Nagios

Use the Notification tab to specify how PEM will behave if an alert is raised.

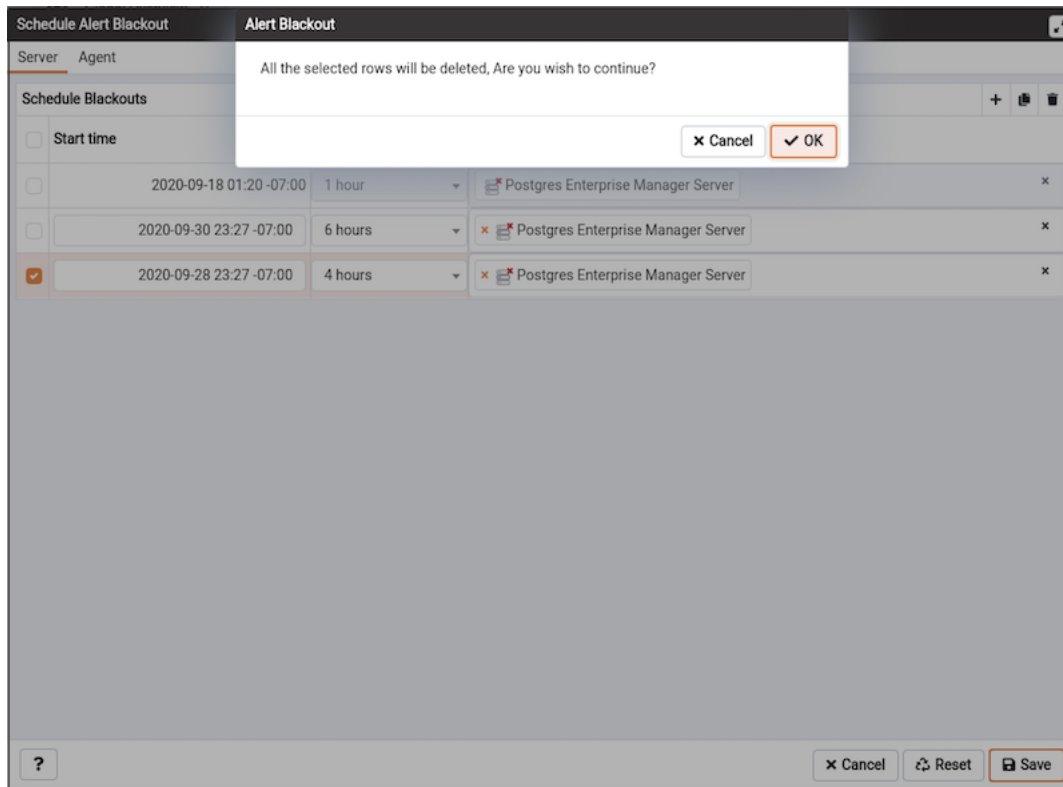


Fig. 66: Schedule Alert Blackout - Delete confirmation

4.6.1 SMTP

Please note that you must configure the PEM Server to use an SMTP server to deliver email before PEM can send email notifications.

4.6.2 Creating an email group

Postgres Enterprise Manager monitors your system for conditions that require user attention. You can use an email group to specify the email addresses of users that the server will notify if current values deviate from threshold values specified in an alert definition. An email group has the flexibility to notify multiple users, or target specific users during user-defined time periods.

Use the Email Groups tab to configure groups of SMTP email recipients. To access the Email Groups tab, select Manage Alerts... from the PEM client's Management menu; when the Manage Alerts tab opens, select Email Groups from the Quick Links toolbar.

The Email Groups tab displays a list of the currently defined email groups. Highlight a group name and click the Edit icon (at the far left end of the row) to modify an existing group.

To define a new email group, click the Add icon (+) in the upper-right corner of the Email Groups table. The Email Group definition dialog opens.

Use the Email Group dialog to define an email group and its members:

- Provide a name for the email group in the Group Name field.

Each row within the email group definition will associate a unique set of email addresses with a specific time period. When an alert is triggered, the server will evaluate the times specified in each row and send the message to those group

Email Groups

+

	Group name
☒	acctg_admin
☒	hr_resources
☒	sales
☒	<Default>

Fig. 67: The Email Groups tab

Email Groups

+

	Group Name
☒	<Default>
☒	sales

Email Group

Group Name

sales

Email group options specify email notifications will be delivered to a specific group member (or members) during a selected time period.

- To addresses:** Enter a comma-delimited list of recipient addresses in the To addresses field.
- Reply to addresses:** Enter a comma-delimited list of recipient addresses in the Reply to addresses field.
- CC addresses:** Enter a comma-delimited list of addresses that will receive a copy of the email in the CC addresses field.
- BCC addresses:** Enter a comma-delimited list of addresses that will receive a copy of the email (without the knowledge of other recipients) in the BCC addresses field.
- From address:** Enter the email address that messages to this group should be sent from in the From address field.
- Subject prefix:** Enter the email subject prefix to this group in the Subject prefix field.
- From time/To time(HH:MM:SS):** Use the From time and To time hour selectors to select a time range for a group member (or members). When a notification is sent, the server will evaluate the times specified within the group list and send the message to those members whose group entries include the current time. Provide the From time and To time values in the locale of the PEM client host, and the PEM server will translate the time into other time zones as required.

To addresses	From address	From time	To time
☒ sales@enterprisedb.com	firstname.lastname@enterprisedb.com	00:00:00	23:59:59

Options

To addresses

sales@enterprisedb.com

Reply to addresses

CC addresses

BCC addresses

From address

firstname.lastname@enterprisedb.com

Subject prefix

From time

00:00:00

To time

23:59:59

Fig. 68: Adding an email group

members whose definitions are associated with the time that the alert triggered.

Click the Add icon (+) in the group members table to open the Options tab, and add the member addresses that will receive notifications for the time period specified:

- Enter a comma-delimited list of recipient addresses in the Reply to Addresses field.
- Enter a comma-delimited list of addresses that will receive a copy of the email in the CC Addresses field.
- Enter a comma-delimited list of addresses that will receive a copy of the email (without the knowledge of other recipients) in the Bcc Addresses field.
- Enter the email address that messages to this group should be sent from in the From Address field.
- Use the Subject prefix field to provide a message that will be added to the start of each subject line when a notification is sent.
- Use the From Time and To Time time selectors to specify the time range for notifications to the group member(s) that are identified on this row. Provide the From Time and To Time values in the locale of the PEM client host, and the PEM server will translate the time into other time zones as required.

When you've identified the member or members that will receive an email during a specific time period, click the Add icon to add a row to the table, and specify another time period and the email addresses that will be notified during those hours. When you've finished defining the email group, click the Save icon.

4.6.3 Deleting an Email Group

To delete an email group, highlight the name of the group in the Email Group table and click the Delete icon (located to the left of the group name).



Fig. 69: Deleting an email group

The group name will be displayed in the Email Group table in red; click the Save icon to make the change persistent and remove the group from the table.

After creating the email group, you can use the Manage Alerts tab to set up the Notification details for an alert that will direct notifications to the group.

4.6.4 Webhook

Please note that you must configure the PEM Server to use webhooks to receive notification of alert events on threshold value violations in your configured applications.

4.6.5 Creating a webhook

Postgres Enterprise Manager monitors your system for conditions that require user attention. You can use a webhook to create the endpoints that will receive a notification if current values deviate from threshold values specified in an alert definition. PEM sends a notification to multiple webhook endpoints, or to specific target webhook endpoints based on the events triggered.

Use the Webhooks tab to configure endpoint recipients. To access the Webhooks tab, select **Manage Alerts...** from the PEM client's **Management** menu; when the **Manage Alerts** tab opens, select **Webhooks** from the **Quick Links** toolbar.

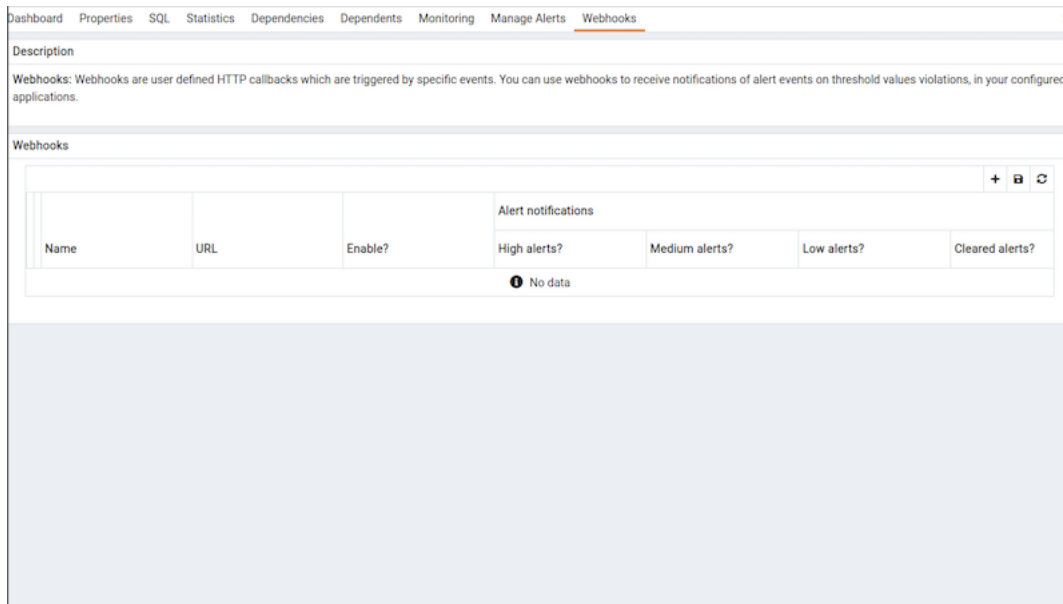


Fig. 70: Webhooks tab

The **Webhooks** tab displays a list of the currently defined recipient applications as endpoints. Highlight an endpoint and click the edit icon (at the far left end of the row) to modify an existing endpoint.

To define a new webhook, click the **Add** icon (+) in the upper-right corner of the table.

Use the **General** tab to define the basic details of the webhook:

- Provide a name for the webhook in the **Name** field.
- Specify a webhook URL where all the notifications will be delivered in the **URL** field.
- Set the request method type used to make the call in the **Request Method** field i.e. **POST** or **PUT**.
- By default webhooks will be enabled; to disable a webhook set **Enable?** to **No**.

Note: The above *Enable?* setting will work only if *enable_webhook* parameter is set to true in *agent.cfg* file. By default, *enable_webhook* parameter is set to true only for the Agent running on the PEM Server Host. For all other Agents running on other hosts, it needs to be set to true manually.

Dashboard Properties SQL Statistics Dependencies Dependents Monitoring Manage Alerts **Webhooks**

Description

Webhooks: Webhooks are user defined HTTP callbacks which are triggered by specific events. You can use webhooks to receive notifications of alert events on threshold values violations, in your configured applications.

Webhooks

Name	URL	Enable?	Alert notifications			
			High alerts?	Medium alerts?	Low alerts?	Cleared alerts?
		☒ Yes	☐ No	☐ No	☐ No	☐ No

General HTTP Headers Payload Notifications

Name

URL

Request method ☒ POST ☐ PUT

Enable? ☒ Yes

Note that to enable TLS certification, configuration has to be done at agent side. For more information [Click here](#)

Please specify webhook name.

Fig. 71: Webhooks - Add New Webhook - General Tab

4.6.6 Defining webhook SSL configurations

You can define the Webhook SSL parameters in the respective agent configuration file or registry in windows. You can find the list of Webhook SSL parameters PEM Agent Configuration Parameters section. If you add or remove any of the agent configuration parameters, you must restart the agent to apply them.

- On 32 bit Windows systems, PEM registry entries for Webhooks are located in HKEY_LOCAL_MACHINE\\Software\\EnterpriseDB\\PEM\\agent\\WEBHOOK
- On 64 bit Windows systems, PEM registry entries for Webhooks are located in HKEY_LOCAL_MACHINE\\Software\\Wow6432Node\\EnterpriseDB\\PEM\\agent\\WEBHOOK
- On Linux systems, PEM configuration options for Webhooks are stored in the agent.cfg file, located (by default) in /usr/edb/pem/agent/etc

```
[WEBHOOK/Django]
webhook_ssl_key=<webhook_client_ssl_key_path>
webhook_ssl_crt=<webhook_client_ssl_certificate_path>
webhook_ssl_ca_crt=<webhook_server_ca_certificate_path>
webhook_ssl_crl=<crl_file_path_to_validate_webhook_server>
allow_insecure_webhooks=<true|false>
```

Fig. 72: Example - Webhook SSL Parameters in agent.cfg file

Use the HTTP Headers tab to define the header parameters to pass while calling the webhook endpoints:

- All the values will be specified as a key and value pair.
- Specify a key parameter in the Key field and a value in the Value field.
- To add multiple HTTP Headers , click the Add icon (+) in the upper-right corner of the HTTP Headers table.
- To delete the HTTP Headers , click on Delete icon to the left of the Key ; the alert will remain in the list, but in strike-through font. Click the Save button to reflect the changes.

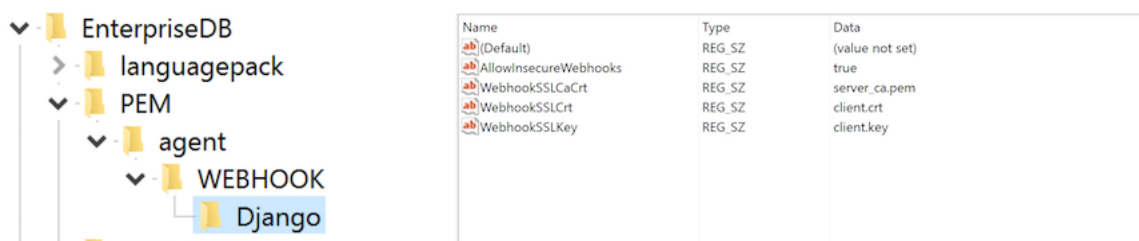


Fig. 73: Example - Webhook SSL Parameters in windows registry

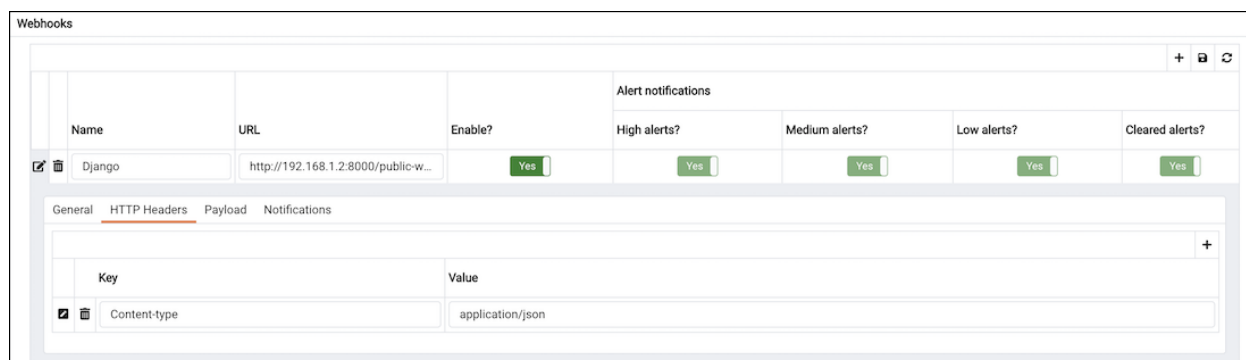


Fig. 74: Webhooks - Add New Webhook - HTTP Headers Tab

- To edit the HTTP Headers , click on the Edit icon to the left of Key .

Use the Payload tab to define the JSON data to be sent to the endpoint when an alert is triggered:

- Type specifies data to be sent in format type (i.e. JSON).
- Use Template to configure JSON data sent to endpoints. Within the Template , you can use placeholders for the following:
 - %AlertID% - the id of the triggered alert.
 - %AlertName% - the name of the triggered alert.
 - %ObjectName% - the name of the server or agent on which the alert was triggered.
 - %ObjectType% - the type on which alert was generated.
 - %ThresholdValue% - the threshold value reached by the metric when the alert triggered.
 - %CurrentValue% - the current value of the metric that triggered the alert.
 - %CurrentState% - the current state of the alert.
 - %OldState% - the previous state of the alert.
 - %AlertRaisedTime% - the time that the alert was raised, or the most recent time that the alert state was changed.
 - %AgentID% - the id of the agent by which alert was generated.
 - %AgentName% - the name of the agent by which alert was generated.
 - %ServerID% - the id of the server on which alert was generated.
 - %ServerName% - the name of the server on which alert was generated.
 - %ServerIP% - the ip or address of the server on which alert was generated.
 - %ServerPort% - the the port of the server on which alert was generated.
 - %DatabaseName% - the name of the database on which alert was generated.
 - %SchemaName% - the name of the schema on which alert was generated.
 - %PackageName% - the name of the package on which alert was generated.
 - %DatabaseObjectName% - the name of the database object name like table name, function name etc on which alert was generated.
 - %Parameters% - the list of custom parameters used to generate the alert.
 - %AlertInfo% - the detailed database object level information of the alert.
- Click on the Test Connection button, to test notification delivery to the mentioned endpoint.

Use the Notifications tab to specify an alert level for webhook endpoints:

- Set All alerts to Yes to enable all alert levels to send notifications.
- To instruct PEM to send an notification when a specific alert level is reached, set the slider next to an alert level to Yes . Please note that you must set All alerts to No to configure an individual alert level.

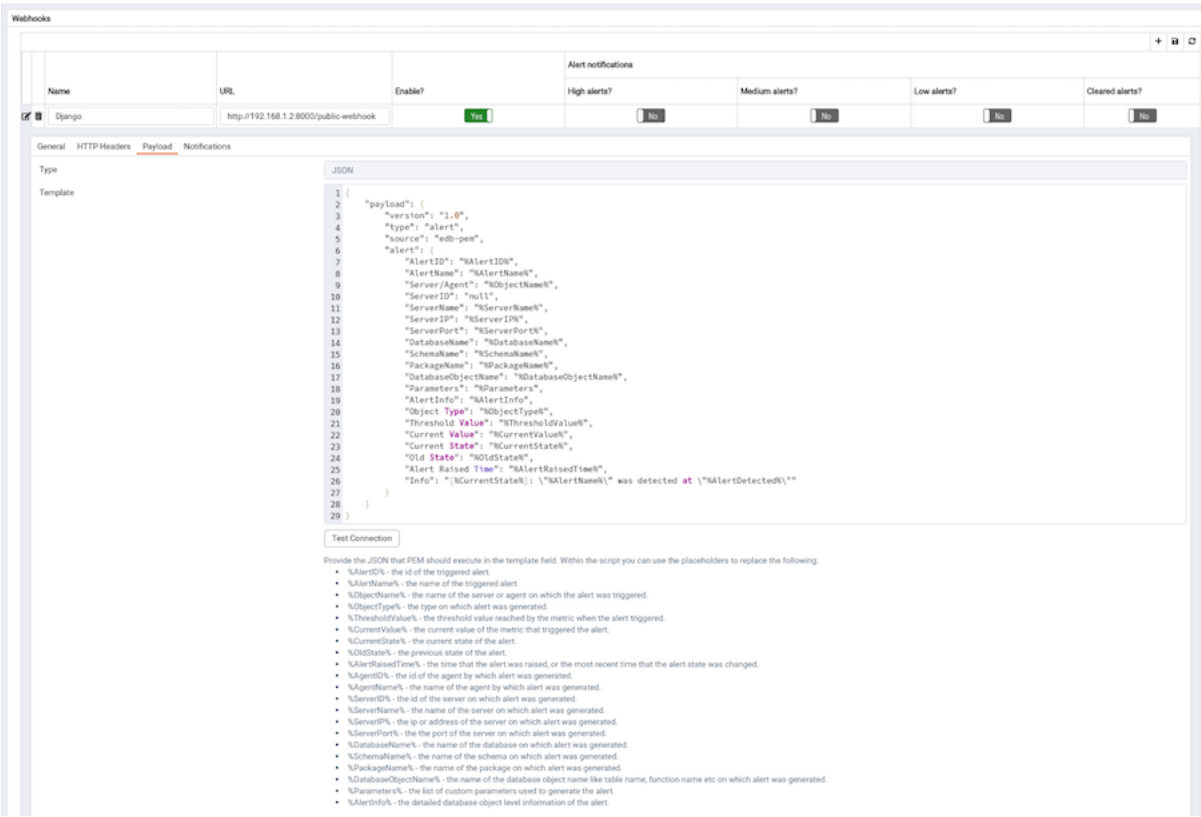


Fig. 75: Webhooks - Add New Webhook - Payload Tab

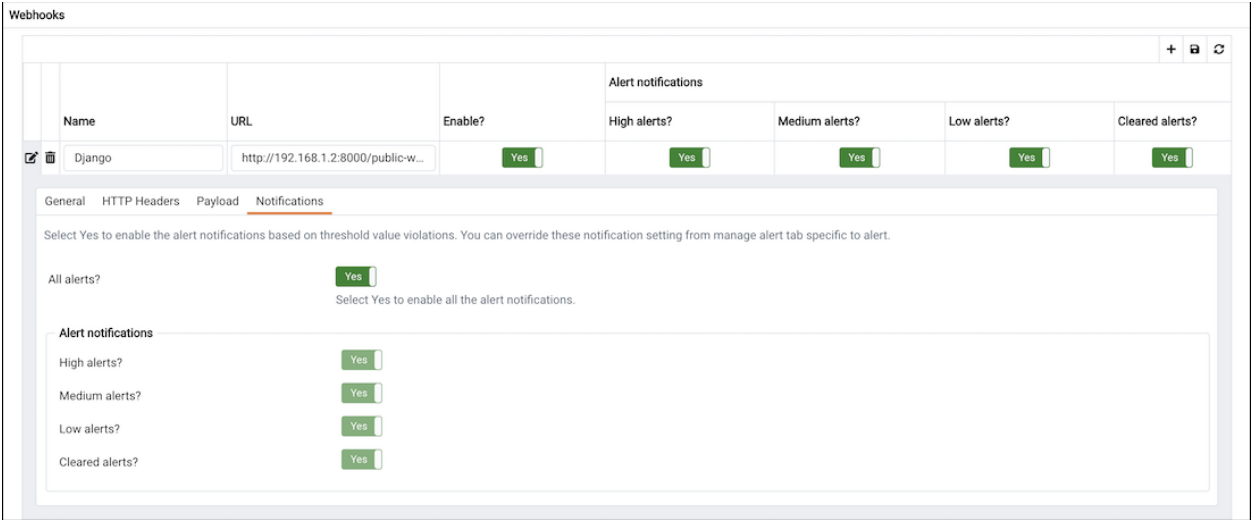


Fig. 76: Webhooks - Add New Webhook - Notifications Tab

4.6.7 Deleting a webhook

To mark a webhook for deletion, highlight the webhook name in the Webhooks table and click the delete icon to the left of the name; the alert will remain in the list, but in strike-through font.

Webhooks							
	Name	URL	Enable?	Alert notifications			
				High alerts?	Medium alerts?	Low alerts?	Cleared alerts?
☒	Django	http://192-168-1-2:8000/public-webh...	☒	☒	☒	☒	☒
☒	Slack	https://hooks.slack.com/services/T0...	☒	☒	☒	☒	☒

Fig. 77: Webhooks - Delete an existing webhook

The delete icon acts as a toggle; you can undo the deletion by clicking the delete icon a second time; when you save your work (by clicking the save icon), the webhook definition will be permanently deleted.

4.6.8 SNMP

Please note that you must configure the PEM Server to send the notifications to an SNMP trap/notification receiver before notifications can be sent. Set the SNMP ver to v1, v2 or v3 to identify the SNMP version.

4.6.9 Example - Configure SNMP v3 traps with net-snmp trap receiver

- Set `snmp_security_engine_id` to `PEM_SNMP_AGENT` in plain text format in the Server Configuration dialog.
- Then convert the plain text value to hexadecimal format in order to use it in `snmptrapd.conf` file. (Please note that you can have hexadecimal value of `snmp_security_engine_id` up to 32 octets length). `edb_notranlate_3`
- Set the following parameters in the Server Configuration dialog:
 - `snmp_security_name` to `pem_snmp_user`
 - `snmp_authentication_protocol` to `MD5`
 - `snmp_authentication_password` to `pem_auth_pass`
 - `snmp_privacy_protocol` to `DES`
 - `snmp_privacy_password` to `pem_priv_pass`
- The `snmptrapd.conf` will have the following values:

```
createUser -e 0x50454D5F534E4D505F4147454E540A pem_snmp_user MD5 pem_auth_pass DES pem_
priv_pass
authUser log pem_snmp_user
```

4.6.10 Using PEM with Nagios

The PEM server can send a passive alert result to Nagios network-alerting software when a user-defined alert is triggered. To instruct the PEM server to notify Nagios of a triggered alert, you must:

- Enable Nagios notification for each alert that will trigger a notification from the PEM server to Nagios. Please note that PEM alerting must be configured before you create the host.cfg file and services.cfg file.
- Configure Nagios-related behaviors of the PEM server.
- Create the host.cfg and services.cfg configuration files.
- If necessary, modify the Nagios configuration file and restart the Nagios server.
- Install the PEM Agent on the system where Nagios server is installed and register it with the PEM Server. Set `enable_nagios` configuration to `true` in the agent.cfg for that agent, and restart the agent service.

After configuring the server to enable Nagios alerting, any triggered alerts will send a passive check result to the Nagios service. The syntax of a passive alert is:

```
<timestamp> PROCESS_SERVICE_CHECK_RESULT; <host_name> ; <service_name> ; <service_status>
;
```

Where:

`timestamp` is the date and time that the alert was triggered.

`host_name` is the name of the server or agent.

`service_name` is the name of the alert.

`service_status` is the numeric service status value:

0 if the service status is OK 1 if the service status is WARNING 2 if the service status is CRITICAL 3 if the service status is UNKNOWN

The PEM server uses the following rules to evaluate the service status:

- If the PEM alert level is CLEARED, the warning message will read OK.
- If the PEM alert level is LOW, the warning message will read WARNING.
- If the `is_nagios_medium_alert_as_critical` flag (specified in the PEM server configuration dialog) is set to FALSE and the alert level MEDIUM, the warning message will read WARNING.
- If the `is_nagios_medium_alert_as_critical` flag (specified in the PEM server configuration dialog) is set to TRUE and the alert level is MEDIUM, the warning message will read CRITICAL.
- If the PEM alert level is HIGH, the warning message will read CRITICAL.

4.6.11 Enabling Nagios notification for an alert

The PEM server maintains a unique set of notification properties for each enabled alert. Use the Notification tab of the Manage Alerts tab to specify that (when triggered), a given alert will send an alert notice to Nagios.

To modify the notification properties of an alert, right-click on the name of the object monitored by the alert, and select Manage Alerts... from the Management menu. When the Manage Alerts tab opens, locate the alert, and then click the edit button to the left of the alert name in the Alerts list. When the edit pane opens, select the Notification tab.

To enable Nagios notification, move the slider next to Submit passive service check result to Nagios to Yes; before exiting the Manage Alerts tab, click the save icon to preserve your changes.

General
Notification

Email notification

All alerts?

No

<Default>

Low alerts?

No

<Default>

Medium alerts?

No

<Default>

High alerts?

No

<Default>

To configure notifications for an alert, use the fields in the Email notification box to specify the user or user group that will receive an email notification if the alert is triggered at the specified level. Use the drop-down listbox to select a pre-defined group that will be sent a notification if an alert of the selected level is triggered. Please note that you must configure the PEM Server to use an SMTP server to deliver email before PEM can send email notifications.

Trap notification

Send trap?

No

SNMP version

v3

Low alert?

No

Medium alert?

No

High alert?

No

Use the Trap notification options to configure trap notifications for this alert. Note that you must configure the PEM Server to send notifications to an SNMP trap/notification receiver before notifications can be sent.

Nagios notification

Submit passive service check result to Nagios?

Yes

Set "Submit passive service check result to Nagios" to "Yes" to instruct the PEM server to notify Nagios when the alert is triggered or cleared.

Script execution

Execute script?

No

Execute on alert cleared?

No

Execute script on

☐ PEM Server
☒ Monitored Server

Code

Use the fields in the Script execution box to (optionally) define a script that will be executed if an alert is triggered, and to specify details about the script execution.

- Set the Execute script slider to Yes to instruct PEM to execute the provided script if an alert is triggered.
- Set the Execute on alert cleared slider to Yes to instruct PEM to execute the provided script when the situation that triggered the alert has been resolved.
- Use the selector to indicate if the script should execute on the PEM Server or the Monitored Server.
- Provide the script that PEM should execute in the Code field. You can provide a batch/shell script, or SQL code. Within the script you can use the placeholders to replace the following:
 - %AlertName% - the name of the triggered alert.
 - %ObjectName% - the name of the server or agent on which the alert was triggered.
 - %ThresholdValue% - the threshold value reached by the metric when the alert triggered.
 - %CurrentValue% - the current value of the metric that triggered the alert.
 - %CurrentState% - the current state of the alert.
 - %OldState% - the previous state of the alert.
 - %AlertRaisedTime% - the time that the alert was raised, or the most recent time that the alert state was changed.

Fig. 78: The Notification tab

4.6.12 Configuring Nagios-related behavior of the PEM Server

You can use the Server Configuration dialog to provide information about your Nagios configuration to the PEM server. To open Server Configuration dialog, select Server Configuration... from the PEM client's Management menu.

The screenshot shows the 'Server Configuration' dialog box. It has a title bar 'Server Configuration' and a search bar 'Search by parameter name'. The dialog contains a table of parameters with their current values and units. The 'nagios_enabled' parameter is highlighted in red and has a green 'True' slider. The 'nagios_medium_alert_as_critical' parameter has a grey 'False' slider. The 'nagios_cmd_file_name' parameter has the value '/usr/local/nagios/var/rw/nagios.cmd'. At the bottom, there are buttons for '?', 'Cancel', 'Reset', and 'Save'.

Parameter Name	Value	Unit
flapping_detection_state_change	3	
job_failure_notification	False	t/f
job_notification_email_group	default	
job_retention_time	30	days
job_status_change_notification	False	t/f
long_running_transaction_minutes	5	minutes
max_metrics_per_group_chart	16	
nagios_cmd_file_name	/usr/local/nagios/var/rw/nagios.cmd	
nagios_enabled	True	t/f
nagios_medium_alert_as_critical	False	t/f
nagios_spool_retention_time	7	days
probe_log_retention_time	30	days
reminder_notification_interval	24	hours
server_log_retention_time	30	days
show_data_points_on_graph	False	t/f
show_data_tab_on_graph	False	t/f
show_unmanaged_servers	True	t/f

Fig. 79: Specify Nagios properties in the Server Configuration dialog

Four server configuration parameters specify information about your Nagios installation and PEM server behavior related to Nagios:

- Use the `nagios_cmd_file_name` parameter to specify the location of the Nagios pipeline file that will receive passive check alerts from PEM. The default value of this parameter is `/usr/local/nagios/var/rw/nagios.cmd`. If your `nagios.cmd` file resides in an alternate location, specify the file location in the Value field.
- Move the slider in the `nagios_enabled` parameter to Yes to instruct the PEM server to send passive check alerts to Nagios.
- Use the `nagios_medium_alert_as_critical` slider to specify the warning severity that the PEM server will pass to Nagios if a medium alert is triggered:

If the `is_nagios_medium_alert_as_critical` flag is set to FALSE and the alert level is MEDIUM, the warning message will read WARNING.

If the `is_nagios_medium_alert_as_critical` flag is set to TRUE and the alert level is MEDIUM, the warning message will read CRITICAL.

- Use the `nagios_spool_retention_time` parameter to specify the number of days of notification history that will be stored on the PEM server. The default value is 7 days.

After modifying parameter values, click the save icon (in the upper-right corner of the Server Configuration dialog) to preserve your changes.

4.6.13 Creating the `hosts.cfg` and `services.cfg` file

The `templates.cfg` file (by default, located in `/usr/local/nagios/etc/objects`) specifies the properties of a generic-host and generic-service. The properties specify the parameters used in the `hosts.cfg` and `services.cfg` files.

In most cases (when PEM is installed in a default configuration), you will not be required to modify the `templates.cfg` file before creating the `hosts.cfg` and `services.cfg` files. If necessary, you can modify the `templates.cfg` file to specify alternate values for parameters or to create new templates.

Before modifying the Nagios configuration file, use the following command to create a `hosts.cfg` file that contains information about the PEM hosts that reside on the local system:

```
psql -U postgres -p 5433 -d pem -A -t -c "select pem.create_nagios_host_config('generic-host')"
```

> `/usr/local/nagios/etc/objects/hosts.cfg`

Then, use the following command to create a `services.cfg` file that contains information about the PEM services that reside on the local system:

```
psql -U postgres -p 5433 -d pem -A -t -c "select pem.create_nagios_service_config('generic-service')"
```

> `/usr/local/nagios/etc/objects/services.cfg`

If you wish to use a custom `template.cfg` file entry, specify the entry name in place of generic-host or generic-service in the above commands.

4.6.14 Modifying the Nagios configuration file

After creating the `host.cfg` and `services.cfg` files, you must specify their location in the Nagios configuration file (by default, `/usr/local/nagios/etc/nagios.cfg`). Modify the configuration file, adding entries that specify the location of the files:

```
cfg_file=/usr/local/etc/objects/hosts.cfg
```

```
cfg_file=/usr/local/etc/objects/services.cfg
```

You can use the following command to confirm that Nagios is properly configured:

```
/usr/local/nagios/bin/nagios -v /usr/local/nagios/etc/nagios.cfg
```

After confirming that Nagios is configured correctly, restart the Nagios service:

```
/usr/local/nagios/bin/nagios -d /usr/local/nagios/etc/nagios.cfg
```


PERFORMANCE DIAGNOSTIC

You can use the Performance Diagnostic dashboard to analyze the database performance for Postgres instances by monitoring the wait events. To display the diagnostic graphs, PEM uses the data collected by EDB Wait States module.

Performance Diagnostic feature is supported for Advanced Server databases from PEM 7.6 version onwards and for PostgreSQL databases it is supported from PEM 8.0 onwards.

Note: For PostgreSQL databases, Performance Diagnostics is supported only for versions 10, 11, and 12 installed on the supported CentOS or RHEL platforms.

For more information on EDB Wait States, see EDB Postgres Advanced Server Guide .

You can analyze the Wait States data on multiple levels by narrowing down your selection of data. Each level of the graph is populated on the basis of your selection of data at the higher level.

Prerequisite:

- For PostgreSQL, you need to install `edb_wait_states_<X>` package from `edb.repo` where `<X>` is the version of PostgreSQL Server. You can refer to EDB Build Repository for the steps to install this package. For Advanced Server, you need to install `edb-as<X>-server-edb-modules` , Where `<X>` is the version of Advanced Server.
- Once you ensure that EDB Wait States module of EDB Postgres Advanced Server is installed, then configure the list of libraries in the `postgresql.conf` file as below:

```
shared_preload_libraries = '$libdir/edb_wait_states'
```

Restart the database server, and then create the following extension in the maintenance database:

```
CREATE EXTENSION edb_wait_states;
```

- You must have super user privileges to access the Performance Diagnostic dashboard.

You get the following error while accessing the Performance Diagnostic dashboard if the above prerequisites are not met:

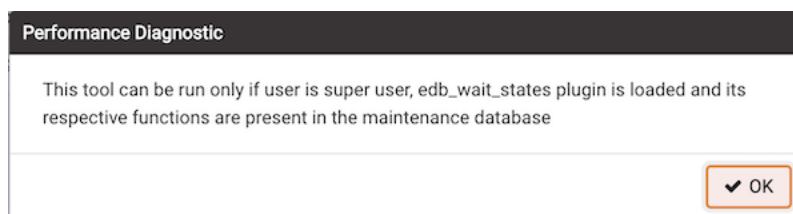


Fig. 1: Performance Diagnostic Error dialog

To open the Performance Diagnostic dashboard, select **Server** and then **Performance Diagnostic...** from the **Tools** menu of the PEM client.

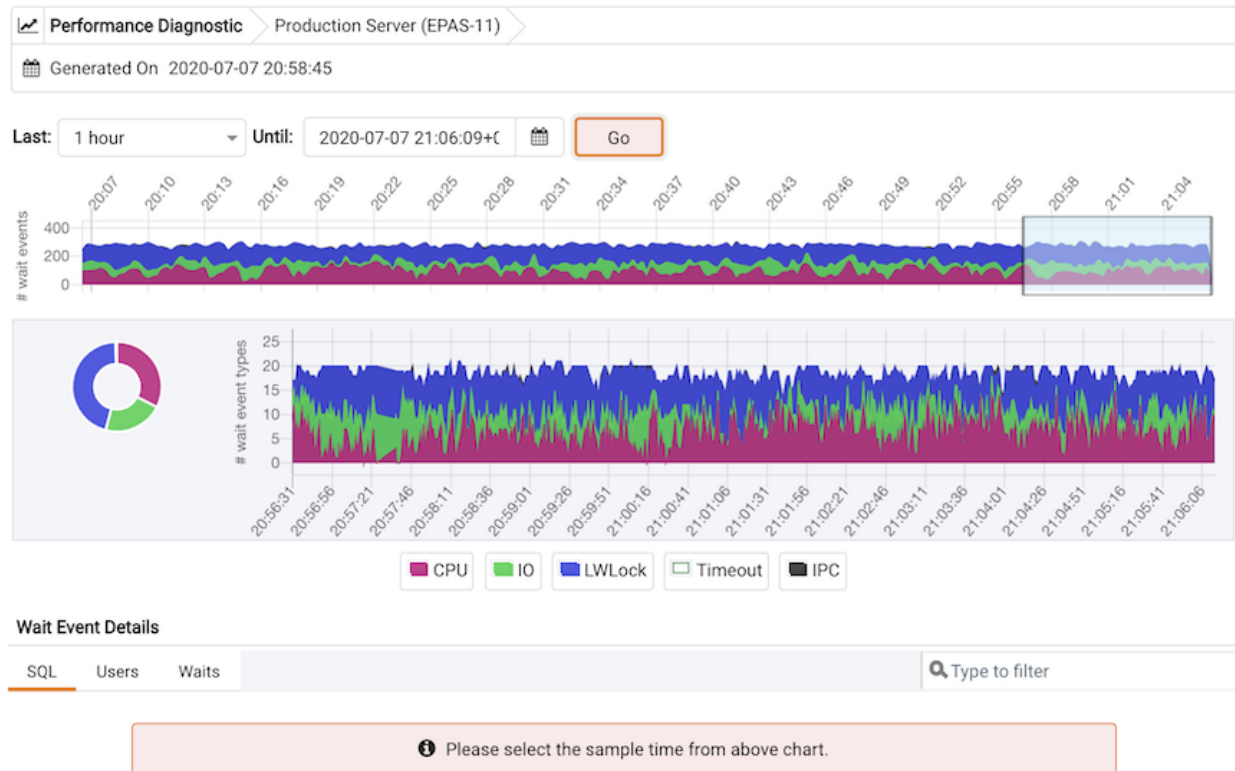


Fig. 2: Performance Diagnostic dashboard

By default, the top most Performance Diagnostic graph pulls the data of last one hour, starting from current date and time. This graph shows the time series containing the number of active sessions. Each point of this time series represents the active sessions and wait events at a particular time and last 15 seconds. These sessions may or may not be waiting for an wait event, or using the CPU at a particular point in time. This time series is generated based on the wait event samples collected by the `edb_wait_states` extension.

You can also use the Preferences dialog to display Performance Diagnostic in a new browser tab. Use **Open in New Browser Tab?** to display the Performance Diagnostics dashboard in a new browser tab.

The range selection in the first graph is 10 minutes. You can use the **Last** drop-down list box to select the duration for which you want to see the graph: select the last 1 hour, last 4 hours, last 12 hours, or last 24 hours. You can also select the date and time through which you want the data to be displayed.

The first graph displays the number of active sessions (and - wait event types) for the selected time interval. You can narrow down the timeline in the first graph to analyze the data for a specific time period.

Next section plots the following graphs based on the selected time interval in the first graph:

1. Donut graph - It shows total wait event types according to the time range selection in the first graph. It helps you understand how much time was spent by those session on waiting for an event.
2. Line graph - It plots a time series with each point representing the active sessions for each sample time.

To differentiate each wait event types and the CPU usage clearly, the graph for each wait event type is displayed in a different color.

Select a particular time on the **Line** graph for which you wish to analyze the wait events; the third section displays the wait event details in the Performance Diagnostics dashboard on the basis of your selected particular time in the second graph. The third section displays wait event details on three tabs:

- The **SQL** tab displays the list of SQL queries having wait events for the selected sample time.

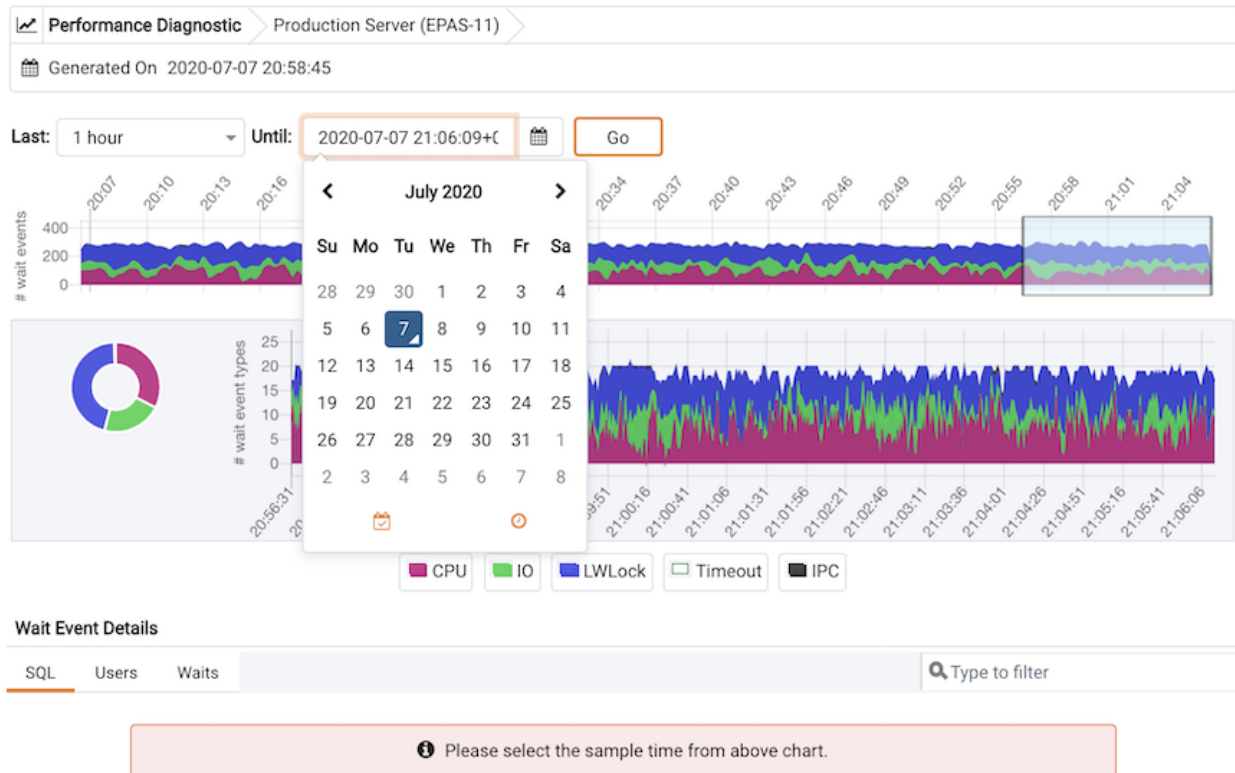


Fig. 3: Performance Diagnostic dashboard - Time Changes option

- The Users tab displays the details of the wait events grouped by users for selected sample time.
- The Waits tab displays the number of wait events belonging to each wait event type for the selected sample time.

You can click on the graph legends to show or hide a particular wait event type in all the graphs. This will make the analysis of a specific wait event type easier.

You can filter the data displayed in the rows under all the three tabs. You can also sort the data alphabetically by clicking on the column headers.

SQL tab

Wait Event Details			
SQL		Users	
SQL		Waits	
Load By Waits		SQL	
		Number of sessions	
		<code>select nation, o_year, sum(amount) as sum_profit from</code>	2
		<code>select o_year, sum(case when nation = \$1 then volume</code>	1
		<code>select l_shipmode, sum(case when o_orderpriority = \$1</code>	1
		<code>select supp_nation, cust_nation, l_year, sum(volume)</code>	1

Fig. 4: Performance Diagnostic - SQL tab with filter applied

Users tab

Waits tab

Click on the Eye icon in any row of the SQL tab to display a new tab with details of the query of that particular row.

Wait Event Details

SQL	Users	Waits		🔍 Type to filter
Load By Waits ▾	Users	Number of Events	Execution Count	
	enterprisedb	6	6	
	test2	6	6	
	test1	5	6	
	test3	5	7	
	test4	3	5	

Fig. 5: Performance Diagnostic - Users tab

Wait Event Details

SQL	Users	Waits		🔍 Type to filter
Load By Wait ▾	Wait Event Type	Wait Event	Number of Events	
	LWLock	buffer_mapping	21	
	IO	DataFileRead	3	
	LWLock	buffer_io	1	

Fig. 6: Performance Diagnostic - Waits tab

This page displays Query ID and its corresponding session IDs in a dropdown list at that particular selected sample time in the Query information section. You can select the session ID for the selected query for which you want to analyze the data. You will see the details corresponding to the selected session ID and query ID. The Query information table also displays the SQL query. If the SQL query is being displayed partially, click the down arrow at the bottom of the section to view the complete SQL query.

The **Wait event types** section displays the total number of wait event types for the selected session ID and query ID. It shows two type of graphs:

1. Donut graph - It shows the proportions of categorical data, with the size of each piece representing the proportion of each wait event type.
2. Timeline bar graph - It can be used to visualize trends in counts of wait event types over time.

To differentiate clearly, each wait event type is represented by a different color in the bar graph.

The **Wait events** section has a table displaying all the wait events occurred during the query execution. It displays data in decreasing order by number of the wait events. Second table displays the wait event with sample time occurred over the period of whole query execution. It allows to analyze the wait events during the query execution over the period of time. It shows the actual samples collected by the EDB Wait States extension for that particular query ID and session ID.

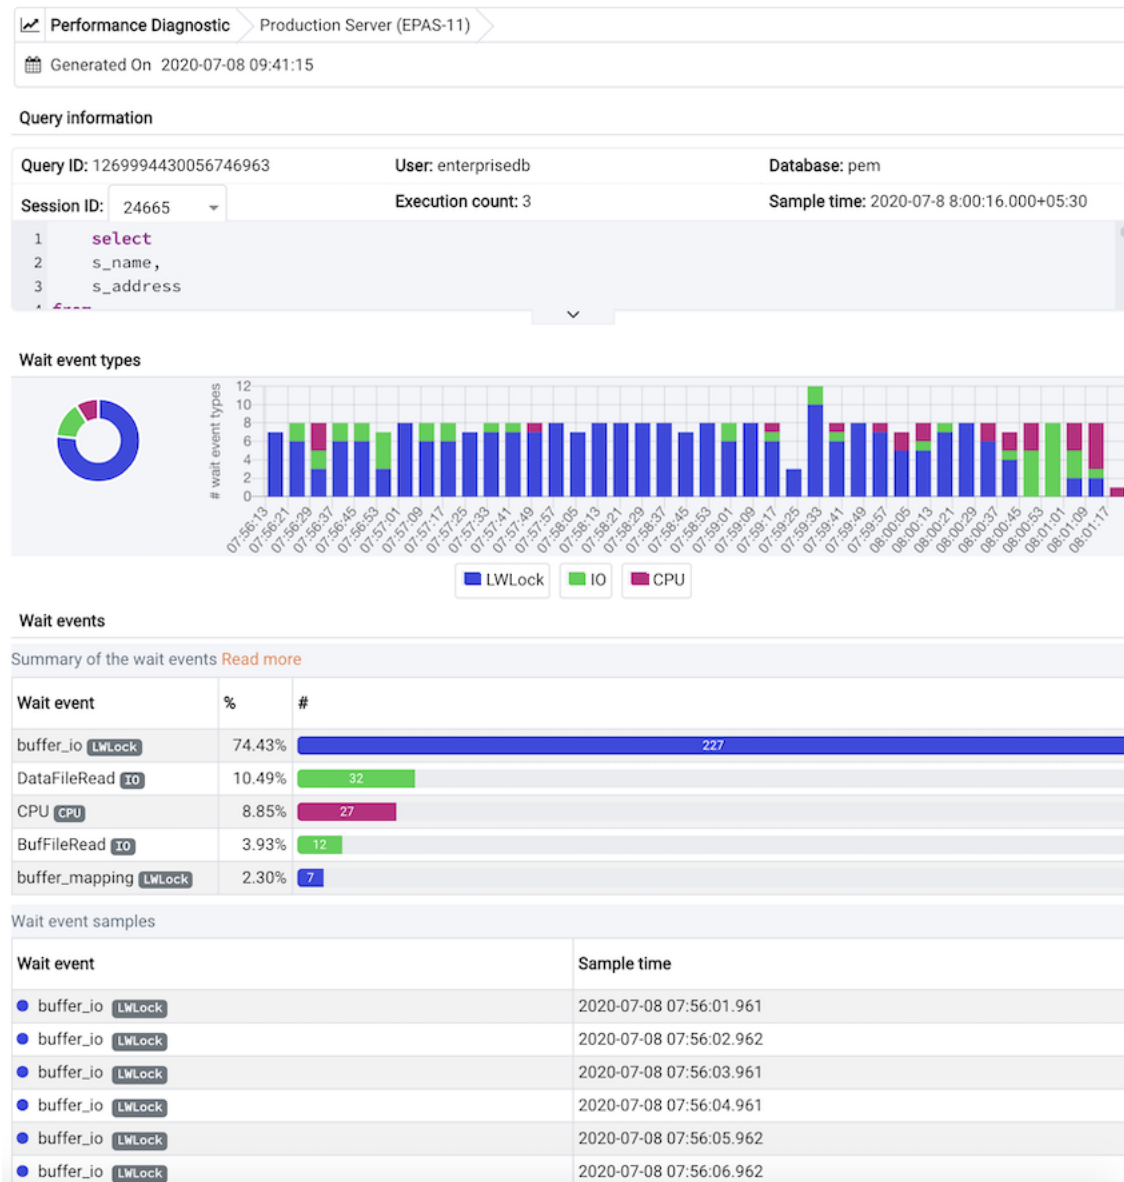


Fig. 7: Performance Diagnostic - Query dashboard

CAPACITY MANAGER

PEM's Capacity Manager analyzes collected statistics (metrics) to generate a graph or table that displays the historical usage statistics of an object, and can project the anticipated usage statistics for an object. You can configure Capacity Manager to collect and analyze metrics for a specific host, server, database, or database object.

You can tailor the content of the Capacity Manager report by choosing a specific metric (or metrics) to include in the report, the time range over which the metrics were gathered, and a high or low threshold for the metrics analyzed. You can also specify a start and end date for the Capacity Manager report. If the end date of the report specifies a time in the future, Capacity Manager will analyze the historical usage of the selected object to extrapolate the projected object usage in the future.

To open Capacity Manager, select the **Capacity Manager...** option from the PEM client **Management** menu; the Capacity Manager wizard opens, displaying a tree control on the **Metrics** tab.

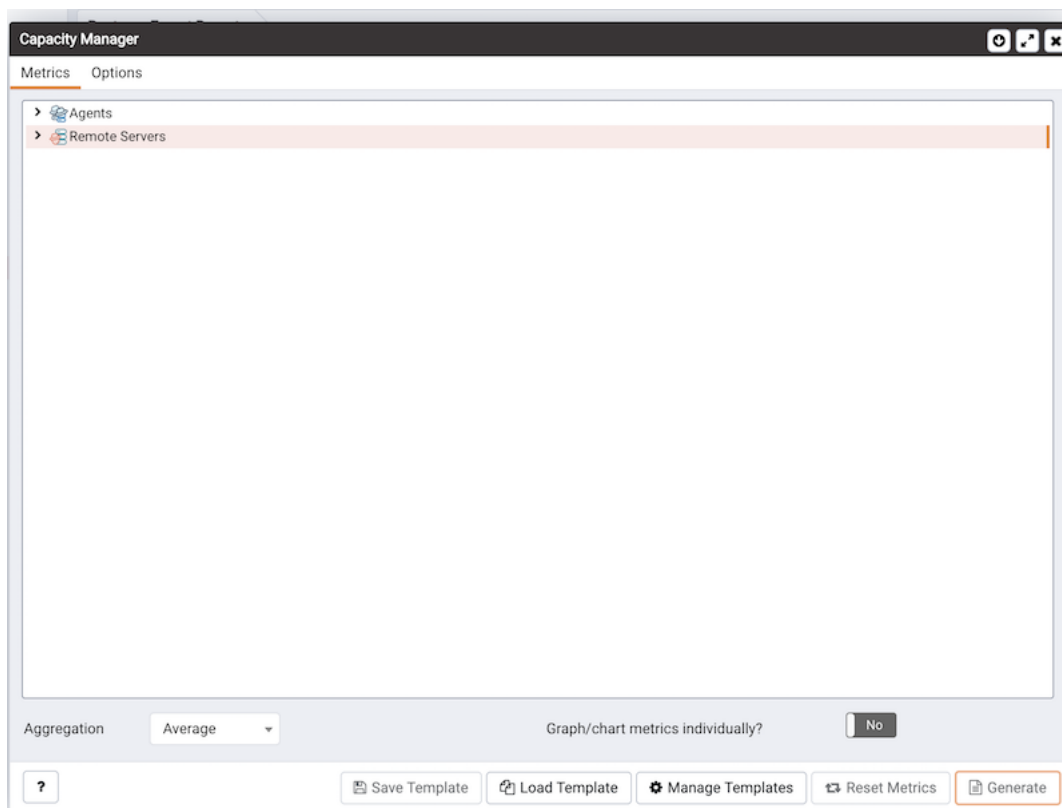


Fig. 1: Capacity Manager dialog

Expand the tree control on the **Metrics** tab to review the metrics for the node that you wish to analyze. Check the box

to the left of the name of the metric to include the metric in your report.

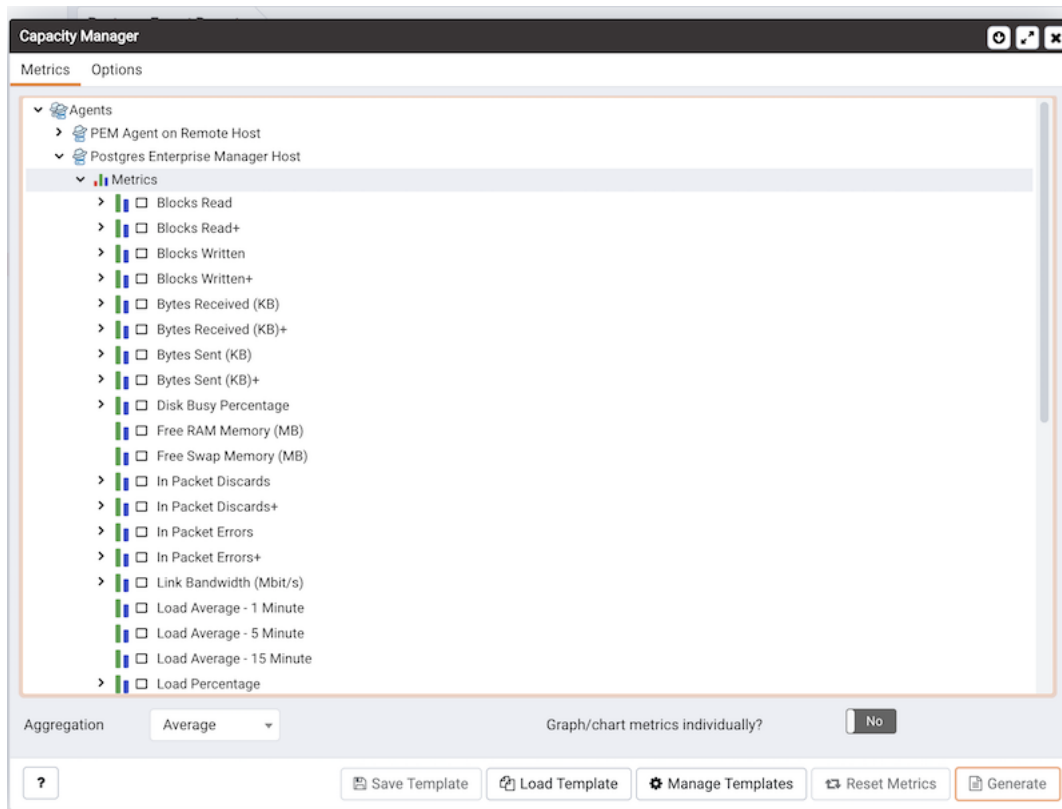


Fig. 2: Capacity Manager dialog - Metrics selection list

Capacity Manager will use the aggregation method specified with the Aggregation drop-down listbox (located at the bottom of the Metrics tab). The aggregation method instructs Capacity Manager how to evaluate and plot the metric values. Select from:

- **Average** : Use the average of the values recorded during the time period.
- **Maximum** : Use the maximum value recorded during the time period.
- **Minimum** : Use the minimum value recorded during the time period.
- **First** : Use the first value recorded during the time period.

To remove a metric from the Capacity Manager report, uncheck the box to the left of the name of a metric.

Move the slider next to **Graph/chart metrics individually?** to **Yes** to instruct Capacity Manager to produce a separate report for each metric selected on the Metrics tab. If the option is set to **No**, all selected metrics will be merged into a single graph or table.

Click the **Generate** button to display the report onscreen (accepting the default configuration options), or use the **Options** tab to customize sampling boundaries, report type and report destination. Please note that the times displayed on the **Options** tab are the time zone in which the PEM client resides.

Use the fields within the **Time Period** box to define the boundaries of the Capacity Manager report:

- Use the **Period** drop-down listbox to select the type of time period you wish to use for the report. You can select:

The screenshot shows the 'Capacity Manager' application window with the 'Options' tab selected. The interface is divided into two main sections: 'Time Period' and 'Report'.

Time Period Section:

- Period:** A dropdown menu set to 'Start time and end time'.
- Start time:** A text input field containing '2020-04-23 17:56:01 +05:30' with a calendar icon to its right.
- End time:** A text input field containing '2020-04-27 17:56:05 +05:30' with a calendar icon to its right.
- Historical day(s):** A numeric input field with the value '7' and up/down arrow controls.
- Extrapolated day(s):** A numeric input field with the value '7' and up/down arrow controls.
- Threshold:** A dropdown menu set to 'Falls below' with a numeric input field below it containing the value '0'.

Report Section:

- Include on report:** A group of radio buttons where 'Graph' is selected (checked).
- Report destination:** A group of radio buttons where 'New tab' is selected.
- Download the report as a file:** An option that is currently unselected.
- Filename:** A text input field containing 'cm_report.html'.
- Note:** A text label stating 'Note: Filename can only be latin-1 compatible characters.'

Footer:

A row of buttons at the bottom of the window: '?', 'Save Template', 'Load Template', 'Manage Templates', 'Reset Metrics', and 'Generate' (which is highlighted with an orange border).

Fig. 3: Specify the time period, type, and destination of the report

Start time and end time	Specify a start date and an end date/time for the report.
Start time and threshold	Specify a start date and time, and a threshold to determine the end time and date for the report.
Historical days and extrapolated days	Specify a start date for the report that is a number of days in the past, and an end date that is a number of days in the future. This option is useful for report templates that do not specify fixed dates.
Historical days and threshold	Specify a start date that is a number of days in the past, and end it when a threshold value is reached.

After specifying the type of time period for the report, select from other options in the Time Period box to define the time period for the report:

- Use the date and time selectors next to the **Start time** field to specify the starting date and time of the sampling period, or select the number of Historical day(s) of data to include in the report. The date and time specified in the Start time field must not be later than the current date/time.

By default, Capacity Manager will select a start time that is one week prior to the current date and time.

- The end boundary for the report can be a time, a number of days in the future, or the point at which a selected metric reaches a user-specified threshold value. Use the date and time selectors next to the **End time** field to specify an end boundary for the report, or select the number of Extrapolated day(s) of data to include in the report. The time specified in the End time field must be later than the time specified in the Start time field.

Note that if you select an end date and time in the future, Capacity Manager will use historical usage information to extrapolate anticipated future usage. Since the projected usage is based on the sampling of historical data, the accuracy of the future usage trend will improve with a longer sampling period.

To specify a threshold value, use the drop-down listbox in the Threshold field to select a metric, an operator (Exceeds or Falls below), and enter a target value for the metric. If you choose to define the end of the report using a threshold, the Capacity Manager report will terminate when the value for the selected metric exceeds or falls below the specified value.

The `cm_max_end_date_in_years` configuration parameter defines a default time value for the end boundary of a Capacity Manager report. If you specify a threshold value as the end boundary of a report, and the anticipated usage of the boundary is not met before the maximum time has passed, the report will terminate at the time specified by the `cm_max_date_in_years` parameter. By default, `cm_max_end_date_in_years` is 5; you can use the Server Configuration dialog to modify the value of `cm_max_end_date_in_years`.

The fields in the Report box specify the report type and destination. Use the **Include on report** radio buttons to specify the type of report produced by Capacity Manager:

- Select **Graph** to instruct Capacity Manager to display the report in the form of a line graph in the PEM client window.
- Select **Table of data** to instruct Capacity Manager to display a table containing the report data in the PEM client window.
- Select **Graph and table of data** to instruct Capacity Manager to display both a line graph and a data table in the PEM client window.

Use the **Report destination** radio buttons to instruct Capacity Manager where to display or save the report:

- Select **New tab** to instruct Capacity Manager to display the report on a new tab in the PEM client. You must select **New tab** to display the first generation of a Capacity Manager report; for subsequent reports, you may select **Previous tab**.
- Select **Previous tab** to instruct Capacity Manager to re-use a previously opened tab when displaying the report.
- Select **Download** the report as a file and specify a file name to instruct Capacity Manager to write the report to the specified file.

When you have specified the report boundaries and selected the type and destination of the Capacity Manager report, click the **Generate** button to create the report.

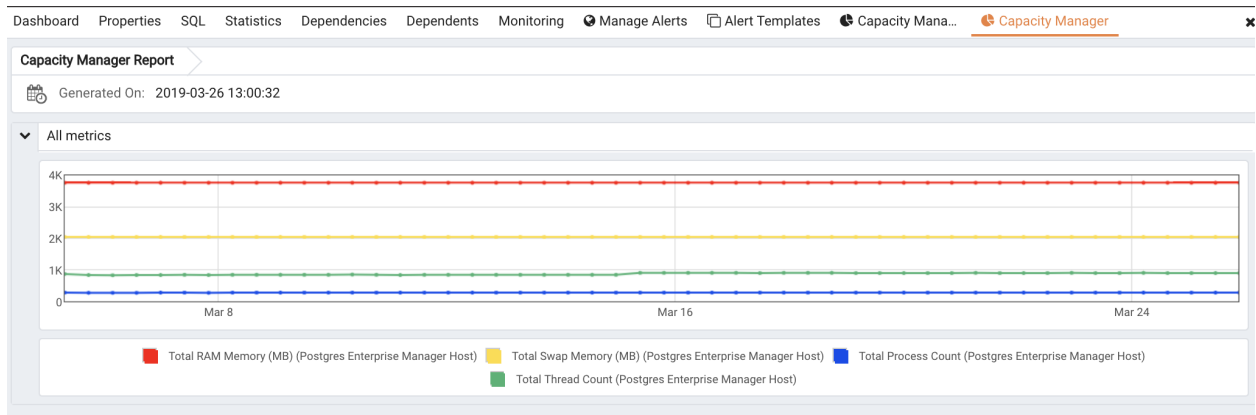


Fig. 4: The Capacity Manager report

Reports saved to file are stored in HTML format. You can review a Capacity Manager report with any web browser that supports Scalable Vector Graphics (SVG). Browsers that do not support SVG will be unable to display a Capacity Manager graph and may include unwanted characters.

6.1 Capacity Manager templates

After defining a report, you can save the definition as a template for future reports. Capacity Manager report templates may be accessed by all PEM users. To save a report definition as a template:

1. Use the **Metrics** and **Options** tabs to define your report. 2. Click the **Save** button to open the **Save Template** dialog.

1. Provide a report name in the **Title** field, select a location to store the template in the tree control. 2. Click **OK**.

When creating a report, you can use the **Load Template** button to browse and open an existing template. Once opened, the report definition may be modified if required, and optionally saved again, either as a new template, or overwriting the original template.

Use the **Manage Templates** button open a dialog that allows you to rename or remove unwanted templates.

Save Template

Title

template_capacity_memory

Location

▼

📁 Templates

★

template_transaction_stats

✕ Cancel

📄 OK

Fig. 5: Saving a Capacity Manager Template

AUDIT MANAGER

You can use the PEM Audit Manager to simplify audit log configuration for Advanced Server instances. With the Audit Manager, you can configure logging attributes such as:

- How often log files are to be collected by PEM
- The type of database activities that are included in the log files
- How often (and when) log files are to be rotated

Audit logs may include the following activities:

- All connections made to the database instance
- Failed connection attempts
- Disconnections from the database instance
- All queries (SELECT statements)
- All DML statements (INSERT, UPDATE, DELETE)
- All DDL statements (e.g., CREATE, DROP, ALTER)

Once the audit logs are stored on the PEM server, you can use the Audit Log dashboard to review the information in an easy-to-read form. The Audit Log dashboard allows you to filter the log file by timestamp range (when an activity occurred), the database on which the activity occurred, the user performing the activity, or the type of command being invoked.

7.1 Setting the Advanced Server instance service ID

To configure logging for an Advanced Server instance, the server must be a PEM-managed server with a bound agent, and the server registration must include the name of a service script. When registering a new server, include the service name in the Service ID field on the Advanced tab of the New Server dialog.

Before adding a service name to an existing (registered and connected) server, you must disconnect the server. Right click on the server name, and select **Disconnect server** from the context menu. Then, right click on the server name and select **Properties** from the context menu. Select the **Advanced** tab, and add a service name to the **Service ID** field.

The Service ID field allows the PEM server to stop and start the service.

- The name of the Advanced Server 11 service script is `edb-as-12`.
- The name of the Advanced Server 11 service script is `edb-as-11`.
- The name of the Advanced Server 10 service script is `edb-as-10`.
- The name of the Advanced Server 9.6 service script is `edb-as-9.6`.

The screenshot shows a configuration window titled 'EPAS_12' with a close button (X) in the top right corner. The window has several tabs: 'General', 'Connection', 'SSL', 'SSH Tunnel', 'Advanced' (which is selected and highlighted with an orange border), 'PEM Agent', and 'BART'. The 'Advanced' tab contains the following fields:

- Host address:** An empty text input field.
- DB restriction:** A large, empty text area.
- Password file:** An empty text input field with a password toggle icon (three dots) on the right.
- Service ID:** A text input field containing the value 'edb-as-12'.
- EFM cluster name:** An empty text input field.
- EFM installation path:** An empty text input field.
- Connection timeout (seconds):** A text input field containing the value '10'.

At the bottom of the window, there are three buttons: 'Cancel' (with a close icon), 'Reset' (with a refresh icon), and 'Save' (with a floppy disk icon). There are also information (i) and help (?) icons on the bottom left.

Fig. 1: The Service ID of the Advanced Server instance

- The name of the Advanced Server 9.5 (or prior) service script is `ppas-9.x`, where `x` specifies the version.
- The name of the PostgreSQL 9.6 service script is `postgresql-11`.
- The name of the PostgreSQL 9.6 service script is `postgresql-10`.
- The name of the PostgreSQL 9.6 service script is `postgresql-9.6`.

7.2 Setting the EDB Audit Configuration probe

Before configuring audit logging of Advanced Server servers, you must ensure that the EDB Audit Configuration probe is enabled. To open the **Manage Probes** tab and check the status of the probe, right click on the name of a registered Advanced Server server in the tree control, and select **Manage Probes...** from the **Management** menu.

Ensure that the **Enabled** column in the **Probe Configuration** dialog is set to **Yes** for the **EDB Audit Configuration** probe.

If EDB Audit Configuration is not enabled, use the **Enabled?** switch on the **Manage Probes** tab to enable it.

7.3 Configuring audit logging with the Audit Manager

To open the **Audit manager** wizard, select **Audit Manager...** from the **Management** menu. The **Audit manager - Welcome** dialog opens.

Click **Next** to continue.

Use the **Select servers** tree control to specify the servers to which the auditing configuration will be applied. To make a server available in the tree control, you must provide the **Service ID** on the **Advanced** tab of the **Create - Server** dialog when registering a server for monitoring by PEM. Note that only EDB Postgres Advanced Server supports auditing; PostgreSQL servers will not be included in the tree control.

Quick Links

 Manage Custom Probes

 Copy Probes

 Help

Probes

Probe name	Execution Frequency			Enabled?		Data Retention	
	Default?	Minutes	Seconds	Default?	Probe Enable?	Default?	Days
Background Writer Statistics	Yes	5	0	Yes	Yes	Yes	180
Blocked Session Information	Yes	5	0	Yes	Yes	Yes	180
Data and Log File Analysis	Yes	0	10	Yes	Yes	Yes	180
Database Frozen XID	Yes	720	0	Yes	Yes	Yes	180
Database Size	Yes	30	0	Yes	Yes	Yes	180
Database Statistics	Yes	30	0	Yes	Yes	Yes	90
EDB Audit Configuration	Yes	2	0	Yes	Yes	Yes	180
Failover Manager Cluster Info	Yes	5	0	Yes	No	Yes	7
Failover Manager Node Status	Yes	5	0	Yes	No	Yes	7

Fig. 2: The EDB Audit Configuration probe

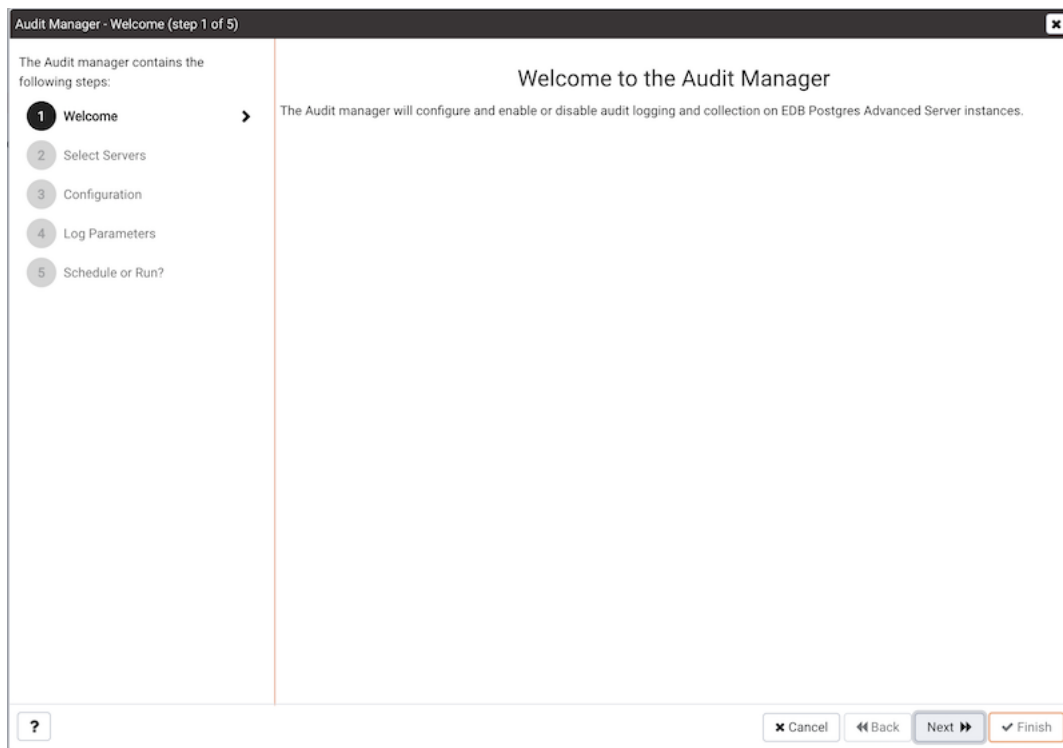


Fig. 3: The Audit Manager Welcome dialog

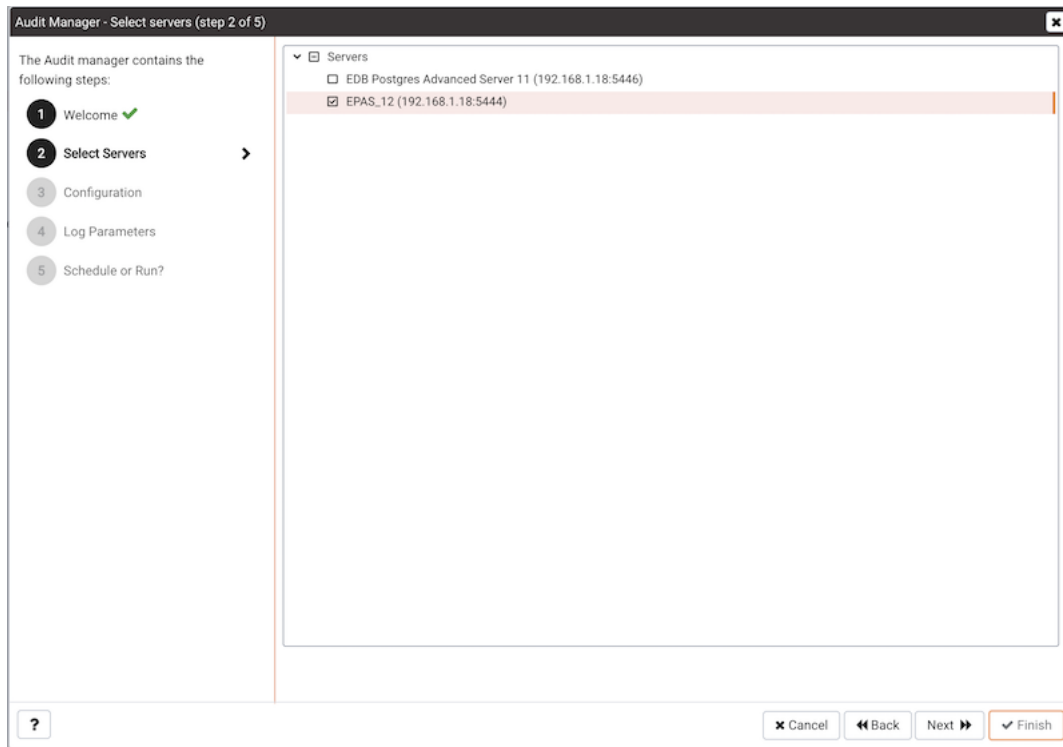


Fig. 4: Select the servers you wish to configure for auditing

Click **Next** to continue.

The **Auditing Parameters Configuration** dialog lets you enable or disable auditing and choose how often log records are collected into PEM.

Use the fields on the **Auditing parameters configuration** dialog to specify auditing preferences:

- Use the **Auditing** switch to Enable or Disable auditing on the specified servers.
- Use the **Audit destination** drop-down to select a destination for the audit logs; select File or Syslog. Please note this feature is supported on Advanced Server 10 and newer releases only.
- Use the **Import logs to PEM** switch to instruct PEM to periodically import log records from each server to the PEM Server. Set the switch to Yes to import log files; the default is No.
- Use the **Collection frequency** drop-down listbox to specify how often PEM will collect log records from monitored servers when log collection is enabled.
- Use the **Log format** drop-down listbox to select the raw log format that will be written on each server. If log collection is enabled, the PEM server will use CSV format.
- Use the **File name** field to specify the format used when generating log file names. By default, the format is set to `audit-%Y-%m-%d_%H%M%S` where:

`audit` is the file name specified in the **Audit Directory Name** field `Y` is the year that the log was stored `m` is the month that the log was stored `d` is the day that the log was stored `H` is the hour that the log was stored `M` is the minute that the log was stored `S` is the second that the log was stored

- Check the box next to **Change Log Directory for selected servers?** and use the **Audit Directory Name** field to specify a directory name to which the audit logs will be written. The directory will reside beneath the data directory on the PEM server.

The screenshot shows the 'Audit Manager - Audit parameters configuration (step 3 of 5)' dialog. On the left, a progress bar indicates the current step is '3 Configuration'. The main configuration area includes:

- Auditing?**: A green 'Enable' button.
- Audit destination**: A dropdown menu set to 'File'.
- Import logs to PEM?**: A radio button set to 'No'.
- Import frequency**: A dropdown menu set to '1 Hour'.
- Log format**: A dropdown menu set to 'XML'.
- File name**: A text field containing 'audit-%Y-%m-%d_%H%M%S' with a description: 'Specifies the name of the file where the audit log will be stored.'
- Log directory**: A section with a switch 'Change log directory for selected servers?' set to 'No' and a text field 'Directory name' containing 'edb_audit' with a description: 'Specifies the directory where the log files will be created. The path of the directory can be relative or absolute to the data folder.'

 At the bottom right, there are buttons for 'Cancel', 'Back', 'Next', and 'Finish' (highlighted in orange).

Fig. 5: The Auditing Parameters Configuration dialog

- Use fields in the **Log directory** box to specify information about the directory in which the log files will be saved:

Move the **Change log directory for selected servers?** switch to **Yes** to enable the **Directory name** field.

Use the **Directory name** field to specify the name of the directory on each server into which audit logs will be written. The directory specified will be created as a sub-directory of the data directory on the server.

Click **Next** to continue.

The **Audit log configuration** dialog is only available if you have enabled auditing on the Auditing parameters configuration dialog.

Use the controls on the **Audit log configuration** dialog to specify log configuration details that will be applied to each server:

- Use the **Connection attempts** switch to specify if connection attempts should be logged:

None to disable connection logging.

All to indicate that all connection attempts will be logged.

Failed to log any connection attempts that fail.

- Use the **Disconnection attempts** switch to specify if disconnections should be logged. Specify:

None to specify that disconnections should not be logged.

All to enable disconnection logging.

- Use the **Log statements** field to specify the statement types that will be logged. Click within the field, and select from:

Select - All statements that include the **SELECT** keyword will be logged.

The screenshot shows the 'Audit Manager - Audit log configuration (step 4 of 5)' dialog. On the left, a progress bar indicates the steps: 1. Welcome, 2. Select Servers, 3. Configuration, 4. Log Parameters (current step), and 5. Schedule or Run?. The main area is divided into sections: 'Connection attempts' with radio buttons for 'None' (selected), 'All', and 'Failed'; 'Disconnection attempts' with radio buttons for 'None' (selected) and 'All'; 'Log statements' with checkboxes for 'Select', 'Error', 'DML', and 'DDL' (all selected); and 'Audit tag' with a text input field. Below these is the 'Log rotation' section, which includes an 'Enable?' checkbox (checked), a 'Day' dropdown menu (set to 'None'), a 'Size(MB)' text input (set to '0'), and a 'Time(seconds)' text input (set to '0'). At the bottom, there are buttons for 'Cancel', 'Back', 'Next', and 'Finish' (highlighted with a red box).

Fig. 6: The Audit Log Configuration dialog

Error - All statements that result in an error will be logged.

DML - All DML (Data Modification Language) statements will be logged.

DDL - All DDL (Data Definition Language) statements (those that add, delete or alter data) will be logged.

Check the box next to **Select All** to select all statement types.

Check the box next to **Unselect All** to deselect all statement types.

- Use the **Audit tag** field to specify a tracking tag for the collected logs. Please note that audit tagging functionality is available only for supported versions of Advanced Server.
- Use the fields in the **Log rotation** box to specify how the log files are managed on each server:

Use the **Enable?** switch to specify that logfiles should be rotated. Please note that a new log file should be used periodically to prevent a single file becoming unmanageably large.

Use the **Day** drop-down listbox to select a day or days on which the log file will be rotated.

Use the **Size (MB)** field to specify a size in megabytes at which the log file will be rotated.

Use the **Time (seconds)** field to specify the number of seconds between log file rotations.

Click **Next** to continue:

Use the **Schedule Auditing Changes** dialog to determine when auditing configuration changes are to take effect.

- Select **Configure logging now?** if you want the auditing configuration changes to take place immediately. The affected database servers will be restarted so the auditing changes can take effect.
- Use the **Time?** selector to schedule the auditing configuration changes to take place at some point in the future. Select the desired date and time from the drop-down lists. The affected database servers will be restarted at the specified date/time to put the auditing changes into effect.

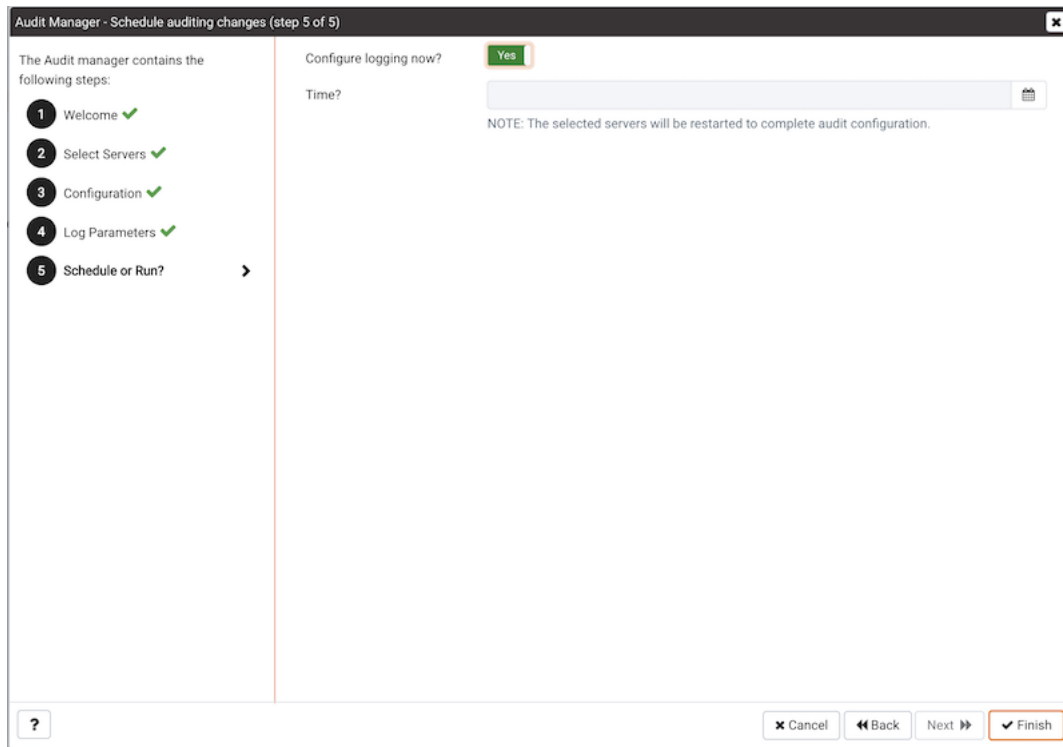


Fig. 7: The Schedule Auditing Changes dialog

Click **Finish** to complete the auditing configuration process.

The Audit Manager will schedule a job to apply the configuration to each server. The job will consist of two tasks: one to update the audit logging configuration on the server, and one to restart the server with the new configuration.

You can use the **Scheduled Tasks** tab to review a list of Scheduled jobs. To open the **Scheduled Tasks** tab, highlight the name of a server or agent and select **Scheduled Tasks...** from the **Management** menu.

7.4 Viewing the log with the Audit Log dashboard

Use the Audit Log dashboard to view the audit log from Advanced Server database instances.

To open the **Audit Log** dashboard, right click on a server or agent node, and select **Audit Log Analysis** from the **Dashboards** menu. You can also open the Audit Log dashboard by navigating through the **Dashboards** menu (located on the **Management** menu).

The Audit Log dashboard displays the audit records in reverse chronological order (newest records at the top, oldest records towards the bottom).

To view older audit records that do not appear in the window, use the vertical scroll bar controlling the list of audit records (the innermost scroll bar of the two located on the right-hand side of the window). As you move the scroll bar towards the bottom of the window, older audit records are continuously loaded and displayed.

You can use filtering to limit the number of audit records that are displayed. Click **Show Filters** to expose the filters panel.

Use the fields in the **filters** panel to provide certain selection criteria for the audit records you wish to display.

Properties

SQL

Statistics

Dependencies

Dependents

Monitoring

Audit Log

Postgres Enterprise Manager Host

Audit Log

Object Type

Host Agent

Status

UP (Since : 15/04/2020, 19:35:06)

Generated On 29/04/2020, 10:08:32

No. of alerts

None

Audit Logs

id	Server	Timestamp	User Name	Database Name	Process ID	Session ID	Transaction ID	Connection From	Command	Message
7879	EPAS_12	29/04/2020, 10:00:07	enterprisedb	postgres	26391	5ea902cf.6717	0	127.0.0.1:46780	idle	disconnection: session time: 0:00:00.014 user=enterprisedb database=postgres host=127.0.0.1 port=46780
7878	EPAS_12	29/04/2020, 10:00:07	enterprisedb	postgres	26391	5ea902cf.6717	0	127.0.0.1:46780	idle	statement: SELECT setting FROM pg_settings WHERE name = 'edb_audit_rotation_seconds'
7877	EPAS_12	29/04/2020, 10:00:07	enterprisedb	postgres	26391	5ea902cf.6717	0	127.0.0.1:46780	idle	statement: SELECT version();
7876	EPAS_12	29/04/2020, 10:00:07	enterprisedb	postgres	26391	5ea902cf.6717	0	127.0.0.1:46780	authentication	connection authorized: user=enterprisedb database=postgres
7875	EPAS_12	29/04/2020, 10:00:07	enterprisedb	postgres	26388	5ea902cf.6714	0	127.0.0.1:46774	idle	disconnection: session time: 0:00:00.007 user=enterprisedb database=postgres host=127.0.0.1 port=46774
7874	EPAS_12	29/04/2020, 10:00:07	enterprisedb	postgres	26388	5ea902cf.6714	0	127.0.0.1:46774	authentication	connection authorized: user=enterprisedb database=postgres
7873	EPAS_12	29/04/2020, 10:00:07	enterprisedb	postgres	26384	5ea902cf.6710	0	127.0.0.1:46766	idle	disconnection: session time: 0:00:00.029 user=enterprisedb database=postgres host=127.0.0.1 port=46766
7872	EPAS_12	29/04/2020, 10:00:07	enterprisedb	postgres	26384	5ea902cf.6710	0	127.0.0.1:46766	idle	statement: SELECT setting FROM pg_settings WHERE name='log_temp_files'
7871	EPAS_12	29/04/2020, 10:00:07	enterprisedb	postgres	26384	5ea902cf.6710	0	127.0.0.1:46766	idle	statement: SELECT setting FROM pg_settings WHERE name='log_autovacuum_min_duration'
7870	EPAS_12	29/04/2020, 10:00:07	enterprisedb	postgres	26384	5ea902cf.6710	0	127.0.0.1:46766	idle	statement: SELECT setting FROM pg_settings WHERE name='log_min_duration_statement'
7869	EPAS_12	29/04/2020, 10:00:07	enterprisedb	postgres	26384	5ea902cf.6710	0	127.0.0.1:46766	idle	statement: SELECT (setting::int/(24*60))::int FROM pg_settings WHERE name = 'log_rotation_age'
7868	EPAS_12	29/04/2020, 10:00:07	enterprisedb	postgres	26384	5ea902cf.6710	0	127.0.0.1:46766	idle	statement: SELECT (setting::int/1024)::int FROM pg_settings WHERE name = 'log_rotation_size'
7867	EPAS_12	29/04/2020, 10:00:07	enterprisedb	postgres	26384	5ea902cf.6710	0	127.0.0.1:46766	idle	statement: SELECT upper(setting) FROM pg_settings WHERE name='syslog_facility';

Fig. 8: The Audit Log dashboard

Properties	SQL	Statistics	Dependencies	Dependents	Monitoring	I/O	Audit Log			
Postgres Enterprise Manager Host ▾ EPAS_12 ▾ Audit Log ▾										
Object Type Server Status UP (Since : 29/04/2020, 09:24:04) Generated On 29/04/2020, 09:38:20 No. of alerts 4 (Acknowledged : 0)										
Audit Logs 										
Start		End		User		Database		Command type		
2020-04-29 08:36:4		2020-04-29 09:37:03		enterprisedb		edb		<input checked="" type="button" value="Apply"/> Reset		
id	Timestamp	User Name	Database Name	Process ID	Session ID	Transaction ID	Connection From	Command	Message	

Fig. 9: The Audit Log dashboard filters panel

- Use the **Start** field to specify a start date for the report. Click the mouse button in the field to open a calendar and select a start date.
- Use the **End** field to specify an end date for the report. Click the mouse button in the field to open a calendar and select an end date.
- Use the **User** field to display only those entries where the activity was initiated by the given Postgres user.
- Use the **Database** field to display only those entries where the activity was issued on the given database.
- Use the **Command type** field to display only those entries where the activity was of the given type. Command types you can specify are idle, authentication, and SELECT. (For viewing SQL statements from user applications, specify the idle command type.)

Click **Filter** to apply the filtering criteria to the log entries.

LOG MANAGER

You can use the PEM Log Manager to simplify server log configuration for Postgres instances. With the Log Manager, you can modify all of your server log parameters with a click:

- Where log files are written
- How often log files are written
- The type of information written to log files
- The format of log file entries
- Log rotation properties

To configure logging for a Postgres instance, the server must be registered as a PEM-managed server, and the registration information must include the name of a service script.

To open the **Log Manager**, select the **Log Manager . . .** option from the **Management** menu of the PEM client. The wizard opens, welcoming you to the Log Manager.

Click **Next** to continue to the **Server selection** dialog.

The **Server selection** dialog displays a list of the server connections monitored by PEM. Check the box next to the name of a server (or servers) to which the Log Manager wizard will apply the specified configuration. Log Manager is disabled for any server displaying a red exclamation mark to the left of its name in the Server selection tree control; there are several reasons that a server may not be enabled:

- Only a server that specifies a **Service ID** on the **Advanced** tab of the **Properties** dialog can be configured by Log Manager.

To provide a service ID, right click on the server name in the tree control, and select **Disconnect Server** from the context menu; if prompted, provide a password. Then, open the context menu for the server, and select **Properties**. Navigate to the **Advanced** tab, and provide the name of the service in the **Service ID** field; click **Save** to save your change and exit the dialog.

- If the PEM agent bound to the server does not have sufficient privileges to restart the server, the server will be disabled.
- If the PEM agent bound to the server is an older version than the associated PEM server, the server will be disabled.

Click **Next** to continue.

Use the options on the **Log configuration** dialog to specify how often log files will be imported to PEM and to specify log rotation details:

Options within the **Import Logs** box specify how often log files will be imported to PEM:

- Use the switch next to the **Import logs to PEM** label to specify if log files will be imported to PEM and displayed on the Server Log Analysis dashboard.

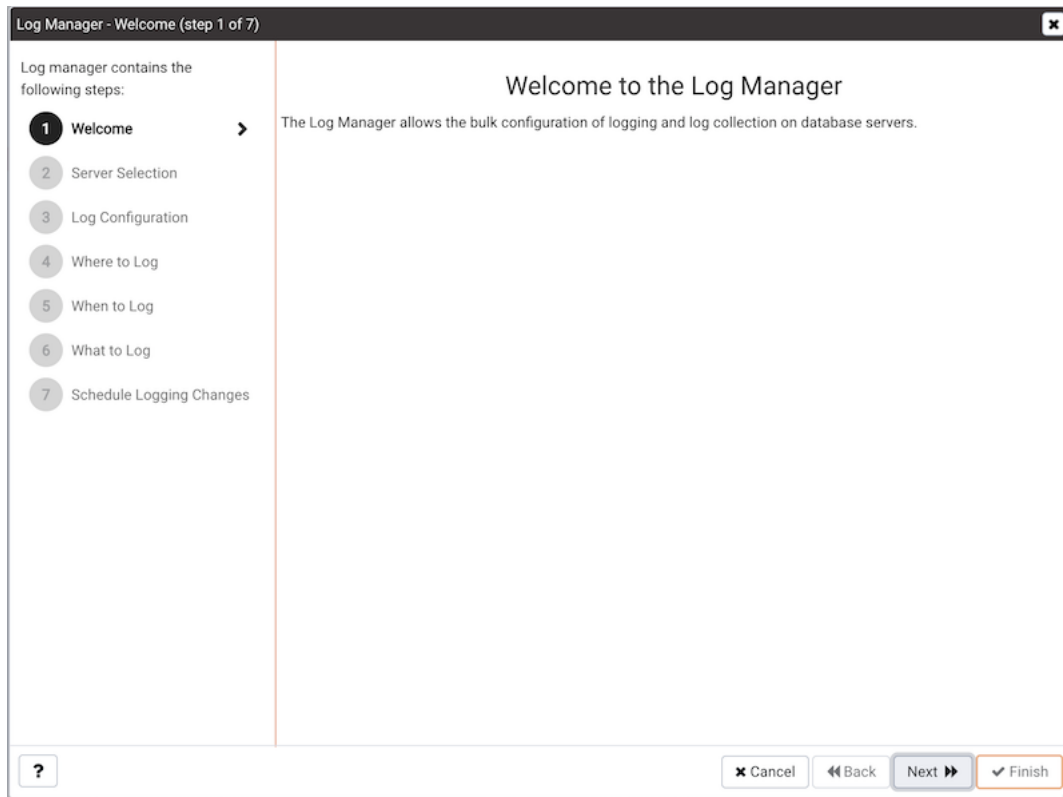


Fig. 1: The Log Manager welcome dialog

- Use the **Import Frequency** drop-down list box to specify how often log files are imported to PEM.

Use the fields in the **Log rotation configuration** box to specify the maximum length (lifespan or size) of a log file:

- Use the **Rotation Size** field to specify the maximum size in megabytes of an individual log file. The default value is 10 MB; when set to 0, no limit is placed on the maximum size of a log file.
- Use the **Rotation Time** field to specify the number of whole days that should be stored in each log file. The default value is 1 day.

Use the **Truncation on Rotation** switch to specify server behavior for time-based log file rotation:

- Select **ON** to specify that the server should overwrite any existing log file that has the same name that a new file would take.
- Select **OFF** to specify that the server should append any new log file entries to an existing log file with the same name that a new log file would take. This is the default behavior.

Click **Next** to continue.

Use the fields on the **Where to log** dialog to specify where log files should be written.

- Select an option from the **Log Destination** box to specify a destination for the server log output:
 - Set the **stderr** switch to **Yes** to specify that log files should be written to stderr.
 - Set the **csvlog** switch to **Yes** to specify that log files should be written to file in a comma-separated value format. This option is automatically enabled (and no longer editable) if you have selected **Import logs to PEM** on the **Schedule** dialog; if you are not importing server log files to PEM, this option is editable.

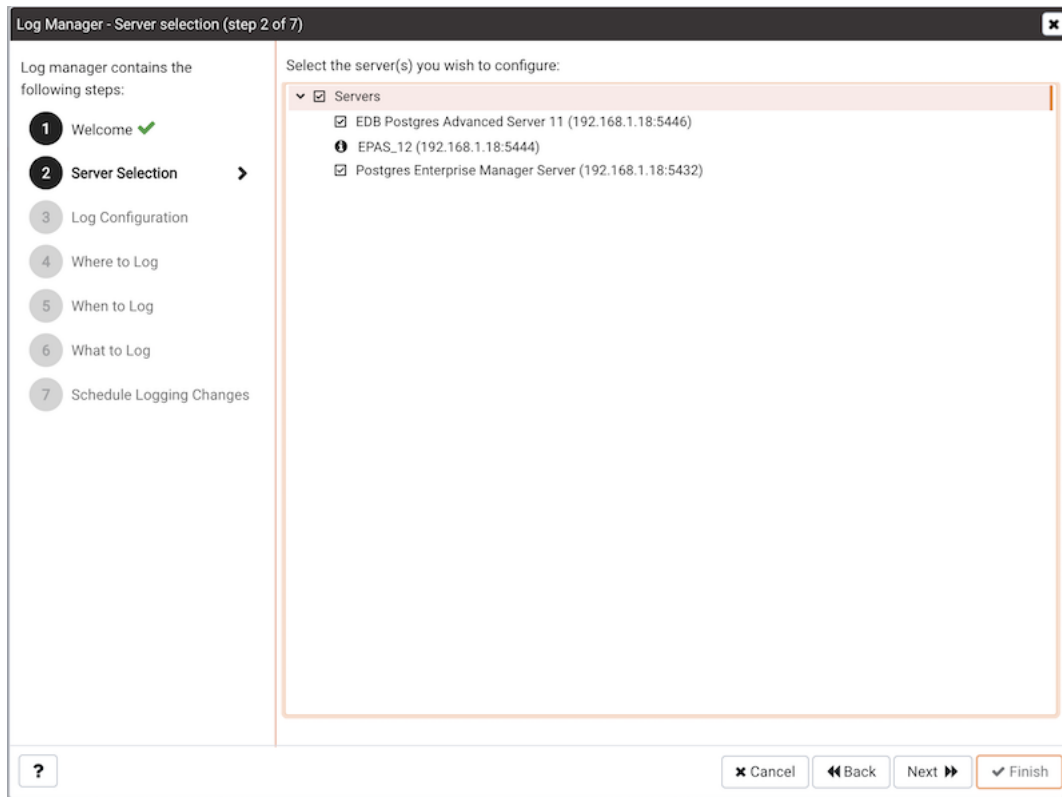


Fig. 2: The Log Manager Server selection dialog

- Set the `syslog` switch to **Yes** to specify that log files should be written to the system log files.
- On Windows, set the `eventlog` switch to **Yes** to specify that log files should be written to the event log.
- Use the options within the **Log collection** box to specify your collection preferences:
 - Set the **Log Collector** switch to **Enable** to instruct the server to re-direct captured log messages (directed to `STDERR`) into log files.
 - Set the **Log Silent Mode** switch to **Enable** to instruct the server to run silently in the background, dis-associated from the controlling terminal.
- Use options in the **Log Directory** box to specify log file location preferences:
 - Set the **Change log directory for selected servers?** switch to **Yes** to specify that each set of log files should be maintained in a separate directory.
 - Use the **Directory name** field to specify the directory to which log files will be written. The directory will reside beneath the `pg_log` directory under the installation directory of the monitored server.
- Use the **Log File Name** field to specify a format for the log file name. If set to **DEFAULT**, the format is `enterprisedb-%Y-%m-%d_%H%M%S`, where:
 - `enterprisedb` is the file name prefix
 - `Y` is the year that the log was stored
 - `m` is the month that the log was store
 - `d` is the day that the log was stored
 - `H` is the hour that the log was stored

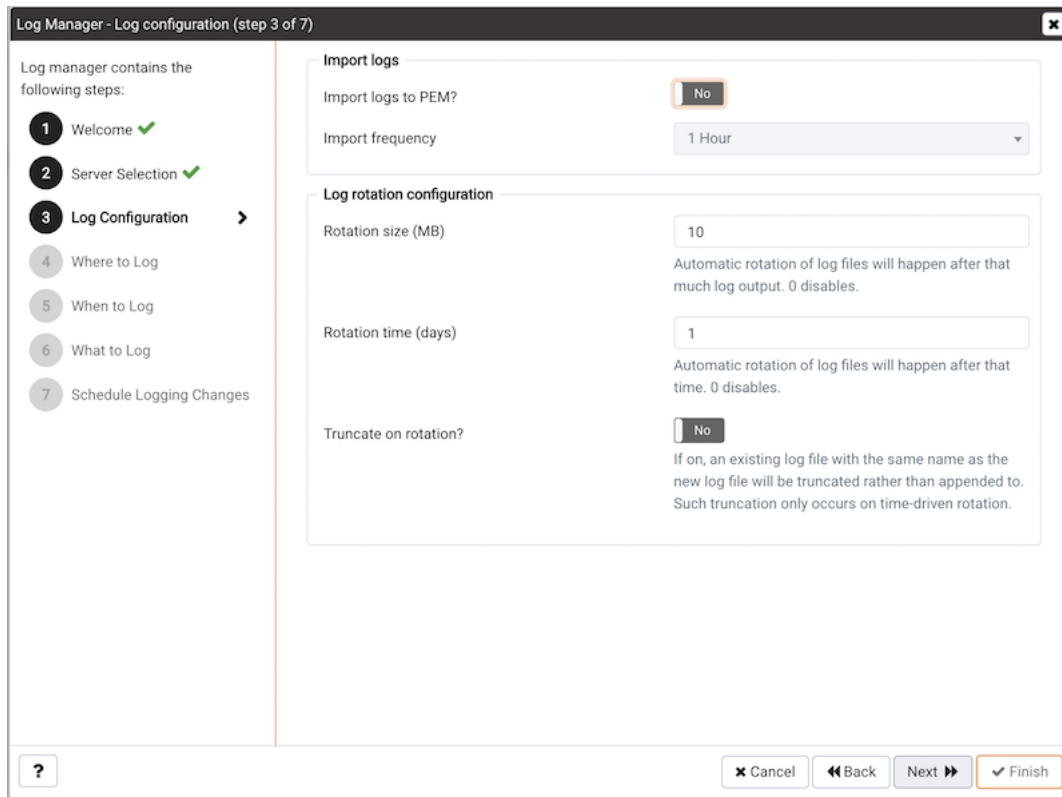


Fig. 3: The Log Manager Log configuration dialog

- M is the minute that the log was store
- S is the second that the log was stored
- When logging to syslog is enabled:
- Use the Syslog Facility drop-down list box to specify which syslog facility should be used. - Use the Syslog Ident field to specify the program name that will identify Advanced Server entries in system logs.

Click Next to continue.

Use the fields on the When to log dialog to specify which events will initiate a log file entry. The severity levels (in order of severity, from most severe to least severe) are:

- panic - Errors that cause all database sessions to abort.
- fatal - Errors that cause a session to abort.
- log - Information messages of interest to administrators.
- error - Errors that cause a command to abort.
- warning - Error conditions in which a command will complete but may not perform as expected.
- notice - Items of interest to users. This is the default.
- info - Information implicitly requested by the user.
- debug5 through debug1 - Detailed debugging information useful to developers.
- Use the Client min messages drop-down list box to specify the lowest severity level of message sent to the client application.

Log Manager - Where to log (step 4 of 7)

Log manager contains the following steps:

- Welcome ✓
- Server Selection ✓
- Log Configuration ✓
- Where to Log >
- When to Log
- What to Log
- Schedule Logging Changes

Log destination

stderr? ☒ Yes ☐ No

syslog? ☐ No ☐ No

csvlog? ☐ No ☐ No

eventlog? ☐ No ☐ No

Log collection

Log collector ☒ Enable ☐ Disable

Log silent mode ☐ Disable ☐ Disable

Log directory

Change log directory for selected servers? ☐ No ☐ No

Directory name

Log file name

Syslog facility

When logging to syslog is enabled, this parameter determines the syslog "facility" to be used.

Syslog ident

When logging to syslog is enabled, this parameter determines the program name used to identify PostgreSQL messages in syslog logs.

? Cancel Back Next Finish

Fig. 4: The Where to Log dialog

- Use the `Log min messages` drop-down list box to specify the lowest severity level that will be written to the server log.
- By default, when an error message is written to the server log, the text of the SQL statement that initiated the log entry is not included. Use the `Log min error statement` drop-down list box to specify a severity level that will trigger SQL statement logging. If a message is of the specified severity or higher, the SQL statement that produced the message will be written to the server log.
- Use the `Log min duration statement` drop-down list box to specify a statement duration (in milliseconds); any statements that exceed the specified number of milliseconds will be written to the server log. A value of `-1` disables all duration-based logging; a value of `0` logs all statements and their duration.
- Use the `Log temp files` field to specify a file size in kilobytes; when a temporary file reaches the specified size, it will be logged. A value of `-1` (the default) disables this functionality.
- Use the `Log autoVacuum min duration` field to specify a time length in milliseconds; if auto-vacuuming exceeds the length of time specified, the activity will be logged. A value of `-1` (the default) disables this functionality.

Click **Next** to continue.

Use the fields on the **What to log** dialog to specify log entry options that are useful for debugging and auditing.

The switches in the **Debug options** box instruct the server to include information in the log files related to query execution that may be of interest to a developer:

- Set the `Parse tree` switch to **Yes** to instruct the server to include the parse tree in the log file.
- Set the `Rewriter output` switch to **Yes** to instruct the server to include query rewriter output in the log file.

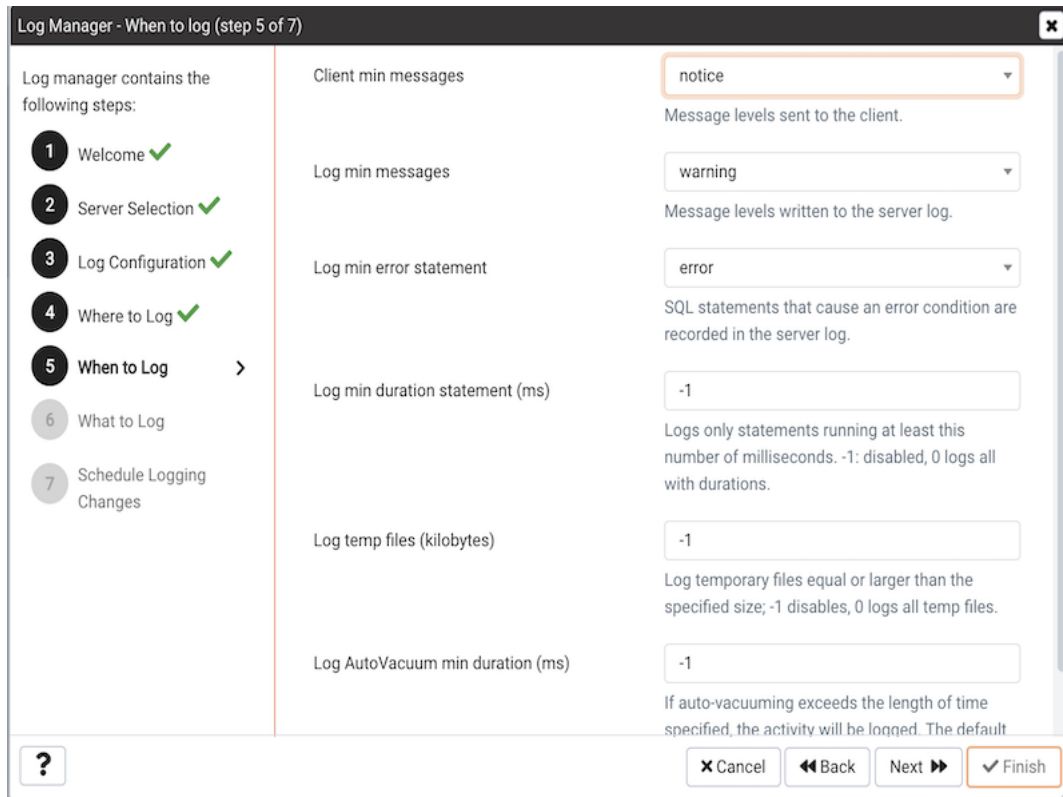


Fig. 5: The Log Manager When to Log dialog

- Set the **Execution plan** switch to **Yes** to instruct the server to include the execution plan for each executed query in the log file.

When the **Indent Debug Options Output in Log** switch is set to **Yes**, the server indents each line that contains a parse tree entry, a query rewriter entry or query execution plan entry. While indentation makes the resulting log file more readable, it does result in a longer log file.

Use the switches in the **General Options** box to instruct the server to include auditing information in the log file:

- Set the **Checkpoints** switch to **Yes** to include checkpoints and restartpoints in the server log.
- Set the **Connections** switch to **Yes** to include each attempted connection to the server (as well as successfully authenticated connections) in the server log.
- Set the **Disconnections** switch to **Yes** to include a server log entry for each terminated session that provides the session information and session duration.
- Set the **Duration** switch to **Yes** to include the amount of time required to execute each logged statement in the server log.
- Set the **Hostname** switch to **Yes** to include both the IP address and host name in each server log entry (by default, only the IP address is logged). Please note that this may cause a performance penalty.
- Set the **Lock Waits** switch to **Yes** to instruct the server to write a log entry for any session that waits longer than the time specified in the `deadlock_timeout` parameter to acquire a lock. This is useful when trying to determine if lock waits are the cause of poor performance.

Use the **Error verbosity** drop-down list box to specify the detail written to each entry in the server log:

- Select **default** to include the error message, **DETAIL**, **HINT**, **QUERY** and **CONTEXT** in each server log entry.

Log Manager - What to log (step 6 of 7)

Log manager contains the following steps:

- Welcome ✓
- Server Selection ✓
- Log Configuration ✓
- Where to Log ✓
- When to Log ✓
- What to Log** >
- Schedule Logging Changes

Debug options

Parse tree? ☐ No ☐ Yes

Execution plan? ☐ No ☐ Yes

Rewriter output? ☐ No ☐ Yes

Indent debug options output in log? ☒ Yes ☐ No

General options

Checkpoints? ☐ No ☐ Yes

Disconnections? ☐ No ☐ Yes

Hostname? ☐ No ☐ Yes

Connections? ☐ No ☐ Yes

Duration? ☐ No ☐ Yes

Lock waits? ☐ No ☐ Yes

Error verbosity: default
Level of message detail written to the server log.

Prefix string: %t
Use the Prefix String field to specify a printf-style string that is written at the beginning of each log file entry.

Statements: none
Controls which SQL statements are logged.

? Cancel Back Next Finish

Fig. 6: The Log Manager What to Log dialog

- Select **terse** to log only the error message.
- Select **verbose** to include the error message, the **DETAIL**, **HINT**, **QUERY** and **CONTEXT** error information, **SQLSTATE** error code and source code file name, the function name, and the line number that generated the error.

Use the **Prefix string** field to specify a printf-style string that is written at the beginning of each log file entry. For information about the options supported, please see the `log_line_prefix` documentation (in the Postgres core documentation), available at:

<http://www.postgresql.org/docs/current/static/runtime-config-logging.html>

Use the **Statements** drop-down list box to specify which SQL statements will be included in the server log. The default is **none**; valid options are:

- Specify **none** to disable logging of SQL statements.
- Specify **ddl** to instruct the server to log **ddl** (data definition language) statements, such as **CREATE**, **ALTER**, and **DROP**.
- Specify **mod** to instruct the server to log all **ddl** statements, as well as all **dml** (data modification language) statements, such as **INSERT**, **UPDATE**, **DELETE**, **TRUNCATE** and **COPY FROM**.
- Specify **all** to instruct the server to log all SQL statements.

Click **Next** to continue.

Use options on the **Schedule logging changes** dialog to specify when logging configuration changes will be applied:

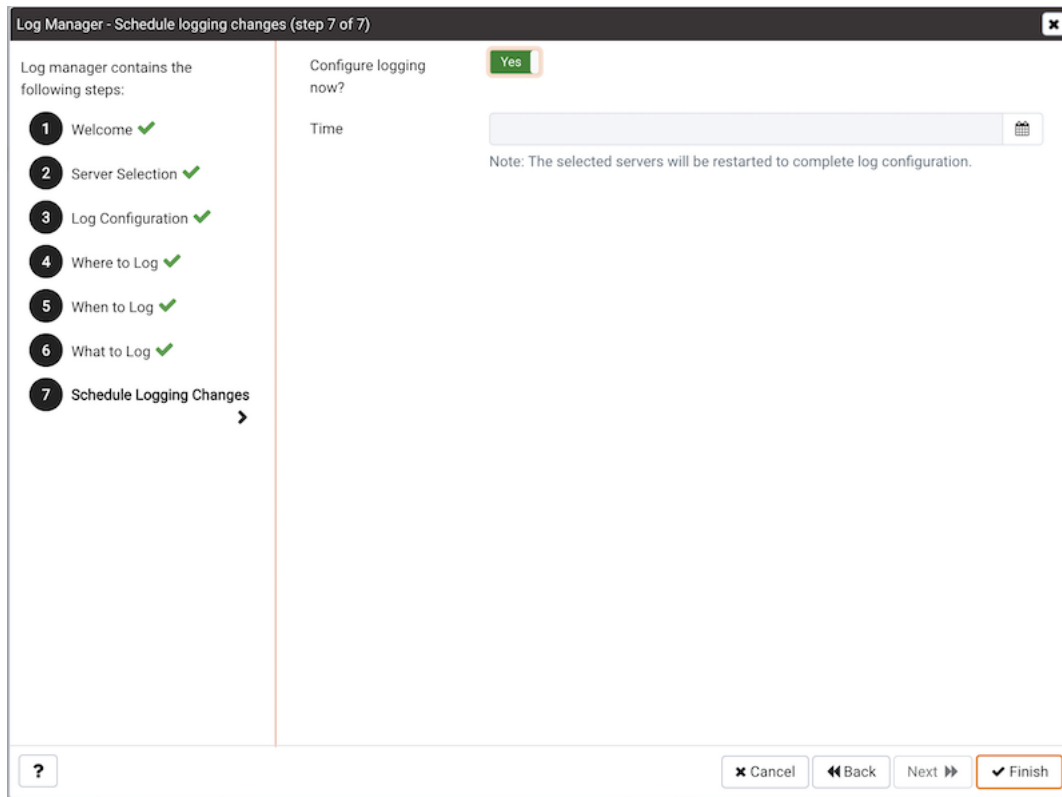


Fig. 7: The Schedule Logging Changes dialog

- Set the **Configure logging now** switch to **Yes** to specify that your configuration preferences will be enabled, and the server will restart when you have completed the Log Manager wizard.
- Set **Configure logging now** to **No** to use the **Schedule it** for some other time calendar selector to specify a convenient time for logging configuration preferences to be applied, and the server to restart.

Note that when you apply the configuration changes specified by the Log Manager wizard, the server restart will temporarily interrupting use of the database server for users.

Click **Finish** to exit the wizard, and either restart the server, or schedule the server restart for the time specified on the scheduling dialog.

8.1 Reviewing the Server Log Analysis dashboard

After invoking the Log Manager wizard, and importing your log files to PEM, you can use the **Server Log Analysis** dashboard to review the log files for a selected server. To open the **Server Log Analysis** dashboard, right-click on the name of a monitored server in the PEM client tree control, and navigate through the **Dashboards** menu, selecting **Server Log Analysis**.

The header information on the **Server Log Analysis** dashboard displays the date and time that the server was started, the date and time that the page was last updated, and the current number of triggered alerts.

Entries in the **Server Log** table are displayed in chronological order, with the most-recent log entries first. Use the scroll bars to navigate through the log entries, or to view columns that are off of the display.

Headings at the top of the server log table identify the information stored in each column; hover over a column heading to view a tooltip that contains a description of the content of each column.

Properties SQL Statistics Dependencies Dependents Monitoring Server Log									
Postgres Enterprise Manager Host Postgres Enterprise Manager Server Server Log									
Object Type Server Status UP (Since : 27/04/2020, 15:47:09) Generated On 29/04/2020, 10:20:00 No. of alerts 6 (Acknowledged : 0)									
Server Logs									
id	Timestamp	User Name	Database Name	Process ID	Session ID	Transaction ID	Connection From	Command	Message
1870601	29/04/2020, 10:15:06	agent1	pem	64373	5ea8fbc6.fb75	5002111	127.0.0.1:55512	COPY	duration: 0.187 ms statement: BEGIN;COPY pemdata.server_logs(server_id, log_time, user_name, database_name, process_id, connection_from, session_id, session_line_num, command_tag, session_start_time, virtual_transaction_id, transaction_id, error_severity, sql_state_code, message, detail, hint, internal_query, internal_query_pos, context, query, query_pos, location, application_name) FROM STDIN WITH NULL AS 'NULL' QUOTE '~' CSV;
1870600	29/04/2020, 10:15:06	agent1	pem	64373	5ea8fbc6.fb75	0	127.0.0.1:55512	COMMIT	duration: 0.572 ms statement: END;
1870599	29/04/2020, 10:15:06	agent1	pem	64373	5ea8fbc6.fb75	5002110	127.0.0.1:55512	UPDATE	duration: 0.129 ms statement: UPDATE pem.log_configuration SET (last_read_filename, file_offset) = ('/var/lib/pgsql/12/data/log/postgresql-2020-04-29_004252.csv', 3135795) WHERE server_id = 1;
1870598	29/04/2020, 10:15:06	agent1	pem	64373	5ea8fbc6.fb75	5002110	127.0.0.1:55512	COPY	duration: 0.289 ms statement: BEGIN;COPY pemdata.server_logs(server_id, log_time, user_name, database_name, process_id, connection_from, session_id, session_line_num, command_tag, session_start_time, virtual_transaction_id, transaction_id, error_severity, sql_state_code, message, detail, hint, internal_query, internal_query_pos, context, query, query_pos, location, application_name) FROM STDIN WITH NULL AS 'NULL' QUOTE '~' CSV;
1870597	29/04/2020, 10:15:06	agent1	pem	64373	5ea8fbc6.fb75	0	127.0.0.1:55512	COMMIT	duration: 0.521 ms statement: END;
1870596	29/04/2020, 10:15:06	agent1	pem	64373	5ea8fbc6.fb75	5002109	127.0.0.1:55512	UPDATE	duration: 0.132 ms statement: UPDATE pem.log_configuration SET (last_read_filename, file_offset) = ('/var/lib/pgsql/12/data/log/postgresql-2020-04-29_004252.csv', 3134305) WHERE server_id = 1;
1870595	29/04/2020, 10:15:06	agent1	pem	64373	5ea8fbc6.fb75	5002109	127.0.0.1:55512	COPY	duration: 0.200 ms statement: BEGIN;COPY pemdata.server_logs(server_id, log_time, user_name, database_name, process_id, connection_from, session_id, session_line_num, command_tag, session_start_time, virtual_transaction_id, transaction_id, error_severity, sql_state_code, message, detail, hint, internal_query, internal_query_pos, context, query, query_pos, location, application_name) FROM STDIN WITH NULL AS 'NULL' QUOTE '~' CSV;
1870594	29/04/2020, 10:15:06	agent1	pem	64373	5ea8fbc6.fb75	0	127.0.0.1:55512	COMMIT	duration: 0.282 ms statement: END;

Fig. 8: The Server Log Analysis dashboard

You can use filtering to limit the number of server log records that are displayed. Click **Show Filters** to expose the filters panel and define a filter.

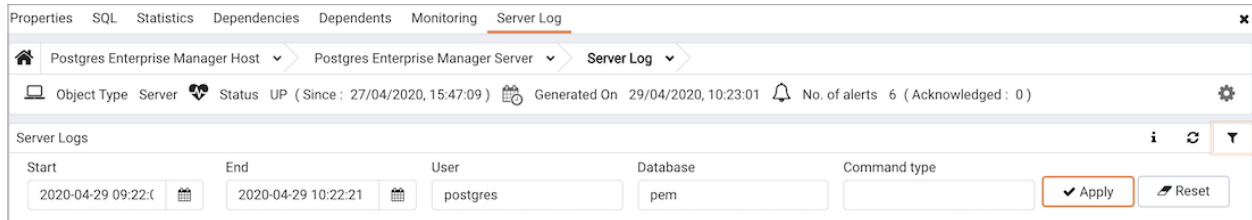


Fig. 9: Defining a Server Log filter

Use the fields within the **filter definition** box to describe the selection criteria that PEM will use to select a subset of a report for display:

- Use the **From** field to specify a starting date for the displayed server log.
- Use the **To** field to specify an ending date for the displayed server log.
- Enter a role name in the **Username** field display only transactions performed by that user.
- Enter a database name in the **Database** field to specify that the server should limit the displayed records to only those transactions that were performed against the specified database.
- Use the **Command Type** field to specify a selection criteria for the commands that will be displayed in the filtered report.

When you've described the criteria by which you wish to filter the server logs, click **Filter** to display the filtered server log in the **Server Log** table.

8.2 Postgres Log Analysis Expert

The PEM Log Analysis Expert analyzes the log files of servers that are registered with Postgres Enterprise Manager, and produces a report that provides an analysis of your Postgres cluster's usage based on log file entries. You can use information on the Log Analysis Expert reports to make decisions about optimizing your cluster usage and configuration to improve performance.

Before using the PEM Log Analysis Expert, you must specify the Service ID on the Advanced tab of the Server Properties dialog, and use the Log Manager wizard to enable log collection by the PEM server.

To open the **Postgres Log Analysis Expert** wizard, select the **Postgres Log Analysis Expert...** option from the **Management** menu of the PEM client. The wizard's **Welcome** dialog opens; click **Next** to continue:

The wizard's **Analyzer** selection dialog displays a list of Analyzers from which you can select. Each Analyzer generates a corresponding table, chart, or graph that contains information gleaned from the log files.

Check the box to the left of an Analyzer to indicate that the Log Analysis Expert should prepare the corresponding table, chart or graph. After making your selections, click **Next** to continue to the Server selection tree control.

Use the tree control to specify which servers you would like the Postgres Log Analysis Expert to analyze. If you select multiple servers, the resulting report will contain the corresponding result set for each server in a separate (but continuous) list. Click **Next** to continue to the Report options dialog.

Use the fields in the **Options** section to specify the analysis method and the maximum length of any resulting tables:

- Use the **Aggregate method** drop-down to select the method used by the Log Analysis Expert to consolidate data for the selected time span. You can select from:

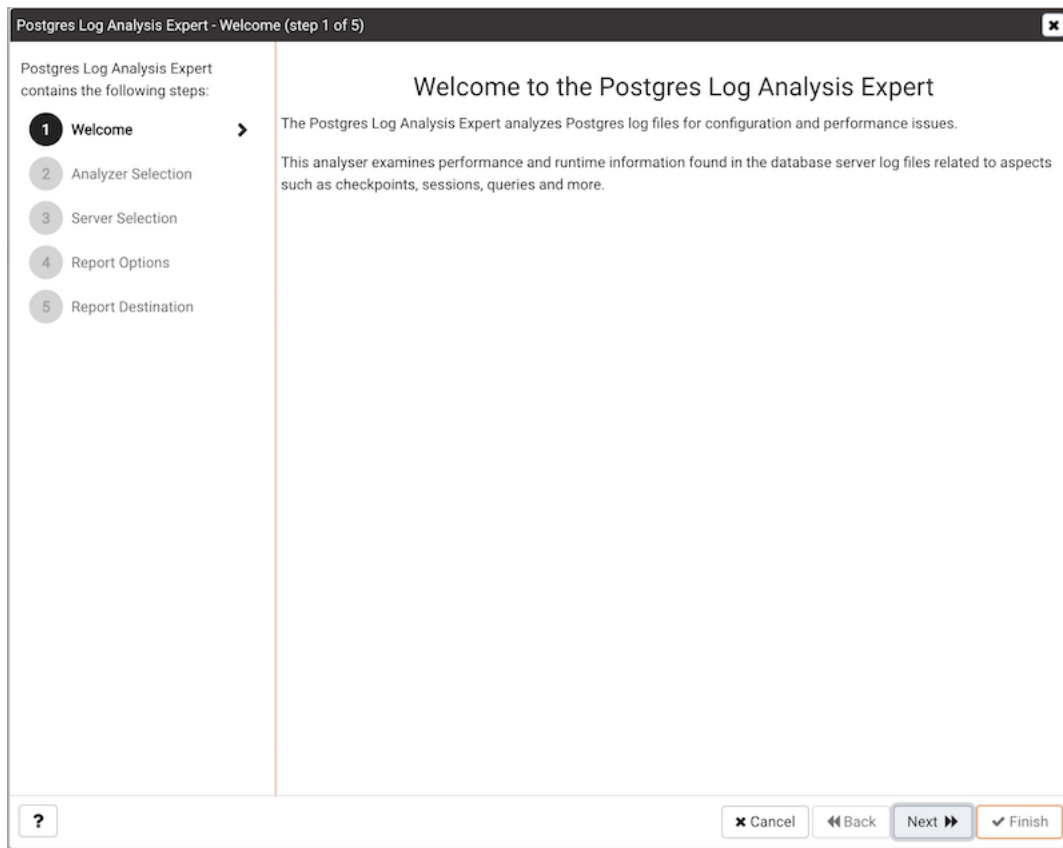


Fig. 10: The Log Analysis Expert Welcome dialog

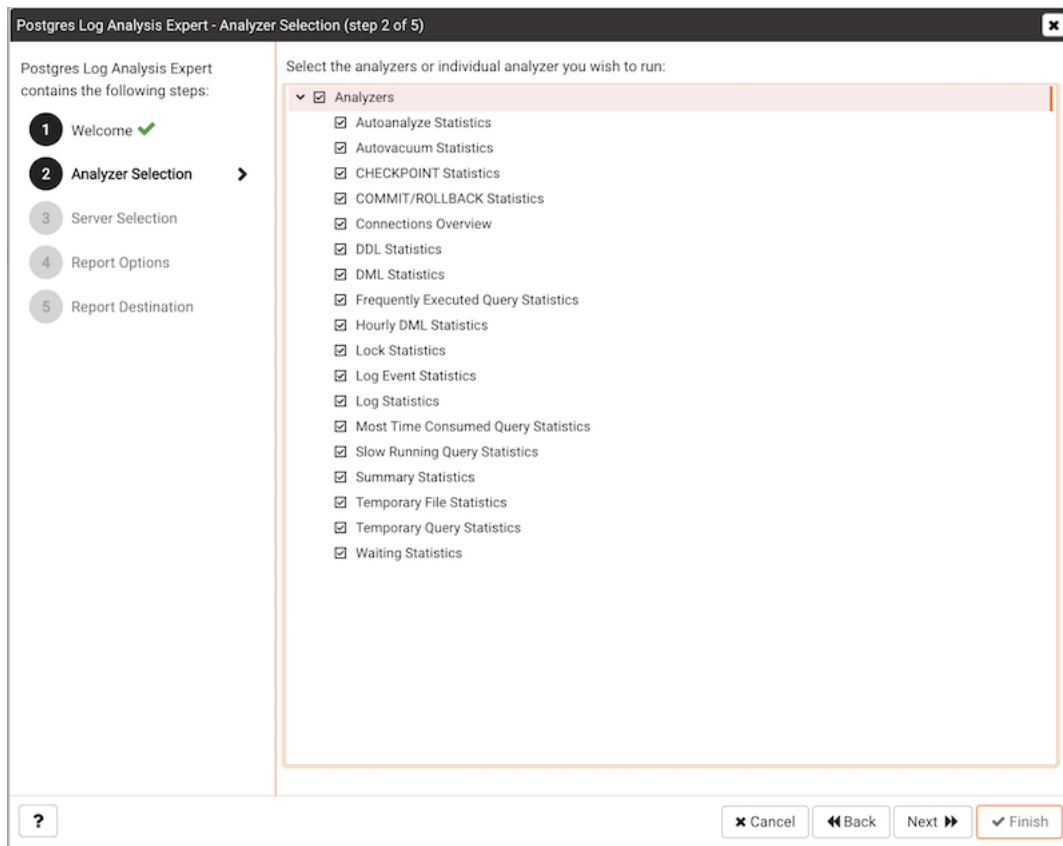


Fig. 11: The Analyzer selection dialog

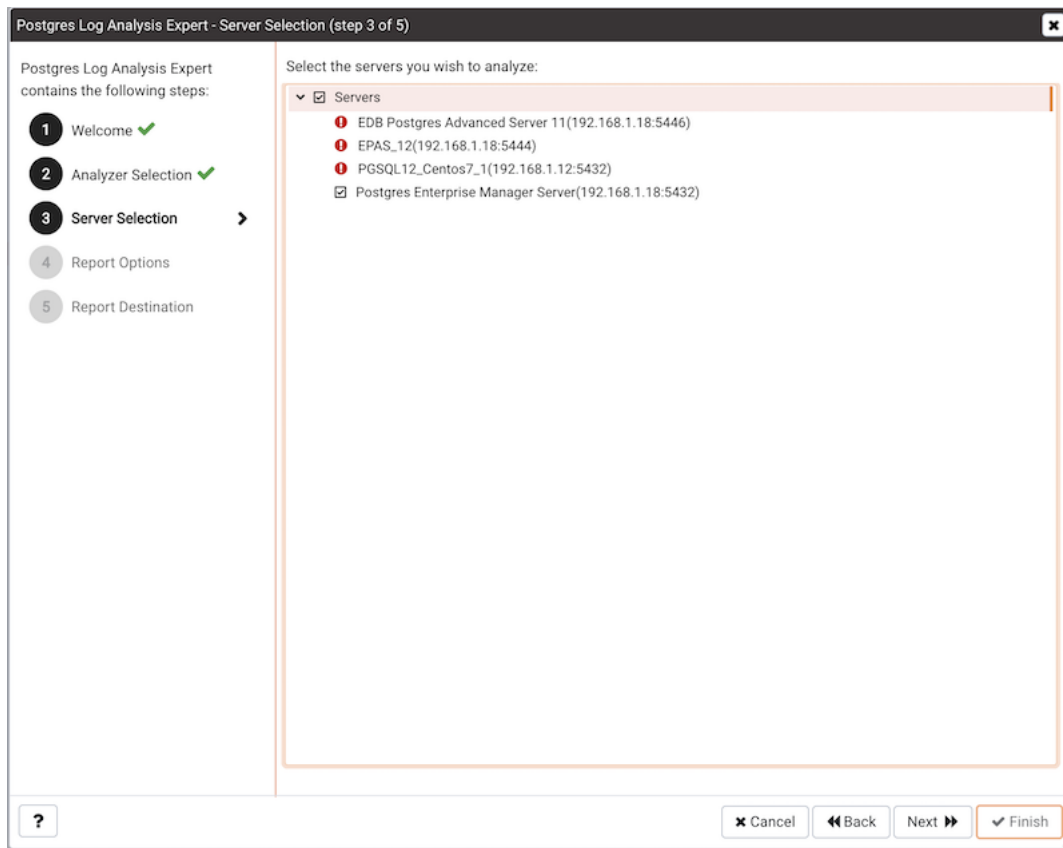


Fig. 12: The Server selection dialog

Postgres Log Analysis Expert - Report Options (step 4 of 5)

Postgres Log Analysis Expert contains the following steps:

1 Welcome ✓

2 Analyzer Selection ✓

3 Server Selection ✓

4 Report Options >

5 Report Destination

Time intervals

Relative days

No

From

2020-04-20 15:55:19 +05:30

To

2020-04-27 15:55:19 +05:30

(+/-)From date

0

Days before or after the 'From date' that should be included in the analysis.

Options

Aggregate method

SUM

Method to consolidate data for the selected time span.

Time span

5

Number of minutes that the analyzer will incorporate into each calculation for a point on a graph.

Rows limit

10

Number of rows to include in a table.

?

Cancel

Back

Next

Finish

Fig. 13: The Report options dialog

- SUM instructs the analyzer to calculate a value that is the sum of the collected values for the specified time span.
- AVG instructs the analyzer to calculate a value that is the average of the collected values for the specified time span.
- MAX instructs the analyzer to use the maximum value that occurs within a specified time span.
- MIN instructs the analyzer to use the minimum value that occurs within a specified time span.
- Use the **Time span** field to specify the number of minutes that the analyzer will incorporate into each calculation for a point on a graph. For example, if the Time span is 5 minutes, and the Aggregate method is AVG, each point on the given graph will contain the average value of the activity that occurred within a five minute time span.
- Use the **Rows limit** field to specify the maximum number of rows to include in a table.

Use the fields in the **Time Intervals** section to specify the time range that the Log Analysis Expert will analyze:

- Set **Relative days** to Yes to enable the (+/-)From date field and specify the number of days before or after the date and time selected in the From field.
- Use the **From** field to specify the starting date and time for the analysis.
- Use the **To** field to specify the ending date and time for the analysis.
- Use the (+/-) From date selector to specify the number of days before or after the From date that should be included in the analysis.

When you've specified the report options, click **Next** to continue to the Report destination dialog.

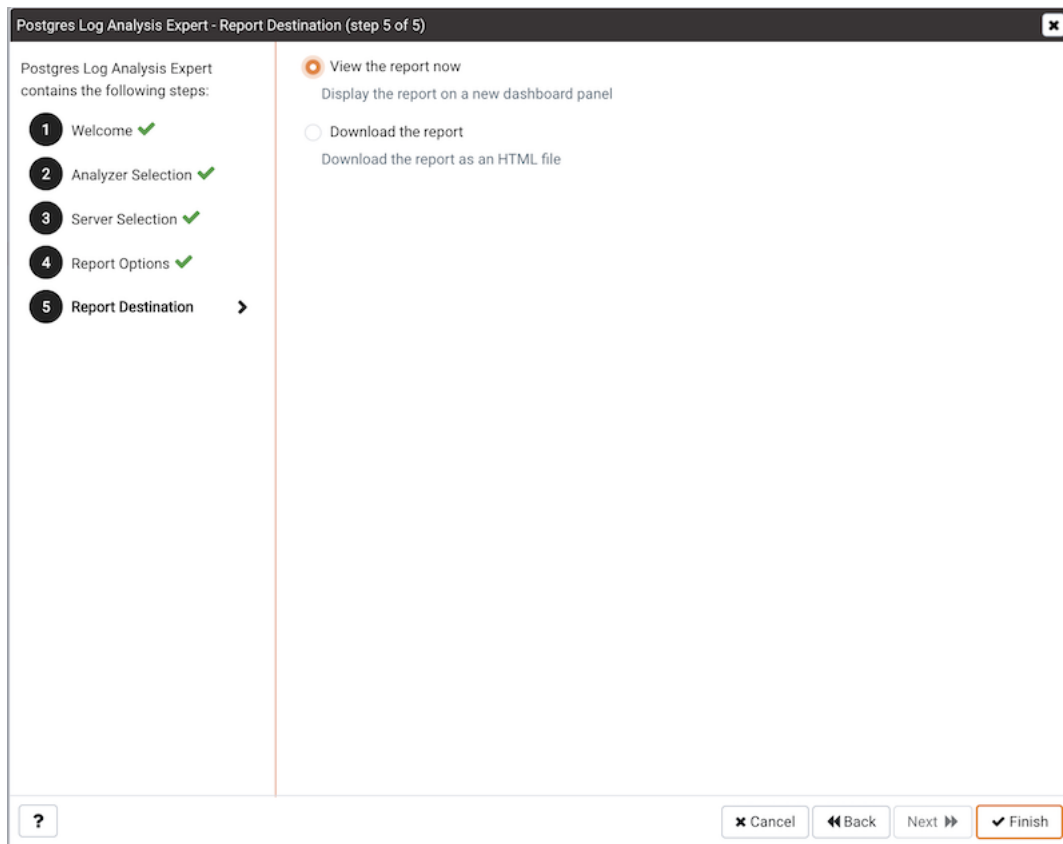


Fig. 14: The Report destination dialog

You can choose the default option and select **Finish** to view the Log Analysis Expert report in the PEM client's tabbed browser, or click the radio button next to **Download** the report to save a copy of the report to an HTML file for later use.

If you have specified that the report should be saved to a file, the report will be downloaded.

8.3 Reviewing the Postgres Log Analysis Expert report

If you've elected to review the report immediately, the Postgres Log Analysis Expert report will be displayed in the PEM Client window. The report header displays the date and time that the report was generated, the time period that the report spans, and the aggregation method specified when defining the report. The name of the server for which information is displayed is noted at the start of each section of the report.

The report displays the tables, graphs and charts that were selected in the Log Analysis Expert wizard. Use the **Jump To** button (located in the lower-right hand corner of the screen) to navigate to a specific graphic.

Postgres Log Analysis Expert

Interval: 2020-4-20 15:55:19 - 2020-4-27 15:55:19

Generated: 2020-04-27 16:00:51

Span: 5 Minutes

Aggregate: SUM

Go to: Postgres Enterprise Manager Server

Postgres Enterprise Manager Server(192.168.1.18:5432)

Summary Statistics	
Settings	Values
Number of unique queries	151649
Total queries	155045
Total queries duration	
First query	27/04/2020 15:47:09.86 IST
Last query	27/04/2020 15:53:59.611 IST
Queries peak time	27/04/2020 15:49:38 IST queries 2821
Number of events	155045
Number of unique events	1
Total number of sessions	348
Total duration of sessions	
Average sessions duration	
Total number of connections	0
Total number of databases	0

Hourly DML Statistics						
Time	Database name	Statement	Count	Min duration	Max duration	Avg duration
27/04/2020 15:00	db01	SELECT	80	0.05	105.40	4.90
27/04/2020 15:00	edbstore_temp	SELECT	58	0.02	66.58	4.64
27/04/2020 15:00	hr	SELECT	48	0.01	29.26	1.87
27/04/2020 15:00	pem	COPY	1641	0.65	43.81	2.08
27/04/2020 15:00	pem	DELETE	73	0.44	8.74	1.04
27/04/2020 15:00	pem	INSERT	190	0.06	9.50	2.19

Fig. 15: The Postgres Log Analysis Expert Report

If the report contains an analysis of more than one monitored server, charts and tables will be displayed in sets; first the graphs, tables and charts that display statistics for one server, then the graphics for the next server in the report.

SQL PROFILING AND ANALYSIS

Most RDBMS experts agree that inefficient SQL code is the leading cause of most database performance problems. The challenge for DBAs and developers is to locate the poorly-running SQL code in large and complex systems, and then optimize that code for better performance.

The SQL Profiler component allows a database superuser to locate and optimize poorly-running SQL code. Users of Microsoft SQL Server's Profiler will find PEM's SQL Profiler very similar in operation and capabilities. SQL Profiler is installed with each Advanced Server instance; if you are using PostgreSQL, you must download the SQL Profiler installer, and install the SQL Profiler product into each managed database instance you wish to profile.

For each database monitored by SQL Profiler, you must:

1. Edit the `postgresql.conf` file; you must include the SQL Profiler library in the `shared_preload_libraries` configuration parameter.

For Linux installations, the parameter value should include:

`$libdir/sql-profiler`

on Windows, the parameter value should include:

`$libdir/sql-profiler.dll`

2. Create the functions used by SQL Profiler in your database. The SQL Profiler installation program places a SQL script (named `sql-profiler.sql`) in the `share/postgresql/contrib` subdirectory of the main PostgreSQL installation directory on Linux systems. On Windows systems, this script is located in the `share` subdirectory. You must invoke this script on the maintenance database specified when registering the server with PEM.
3. Stop and re-start the server for the changes to take effect.

Please note: if you have connected to the PEM server with the PEM client before configuring SQL Profiler, you must disconnect and reconnect with the server to enable SQL Profiler functionality. For more detailed information about installing and configuring the SQL Profiler plugin, please refer to the PEM Installation Guide, available from the EDB website at:

<http://enterprisedb.com/products-services-training/products/documentation>

9.1 Creating a new SQL trace

SQL Profiler captures and displays a specific SQL workload for analysis in a SQL trace. You can start and review captured SQL traces immediately, or save captured traces for review at a later time. You can use SQL Profiler to create and store up to 15 named traces; use menu options to create and manage traces.

9.1.1 Creating a trace

You can use the `Create trace...` dialog to define a SQL Trace for any database on which SQL Profiler has been installed and configured. To access the dialog, highlight the name of the database in the PEM client tree control; navigate through the Management menu to the SQL Profiler pull-aside menu, and select `Create trace...`

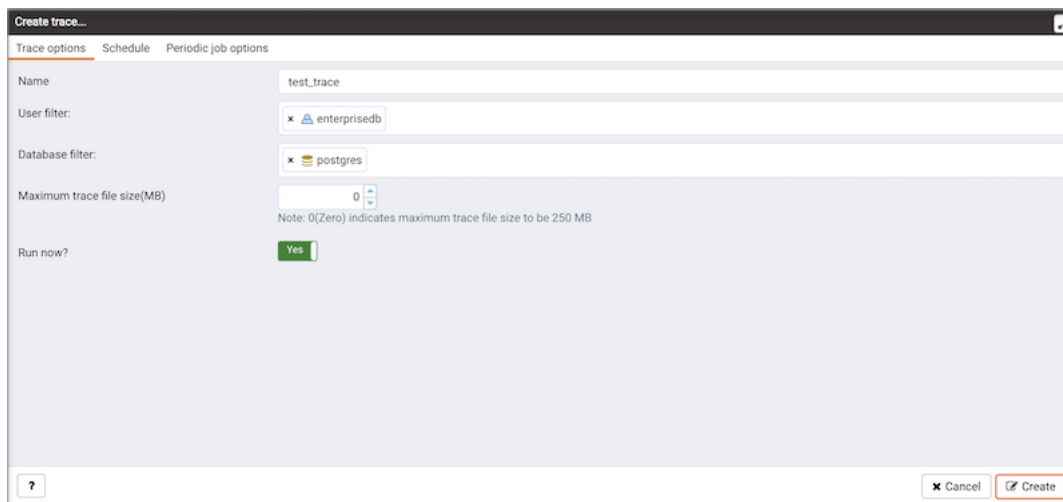


Fig. 1: The Trace options tab

Use the fields on the `Trace options` tab to specify details about the new trace:

- Provide a name for the trace in the `Name` field.
- Click in the `User filter` field to specify the roles whose queries will be included the trace; optionally, check the box next to `Select All` to include queries from all roles.
- Click in the `Database filter` field to specify which databases to trace; optionally, check the box next to `Select All` to include queries against all databases.
- Specify a trace size in the `Maximum Trace File Size` field; SQL Profiler will terminate the trace when it reaches approximately the size specified.
- Specify `Yes` in the `Run Now` field to start the trace when you select the `Create` button; select `No` to enable fields on the `Schedule` tab.

Use the fields on the `Schedule` tab to specify scheduling details for the new trace:

- Use the `Start time` field to specify the starting time for the trace.
- Use the `End time` field to specify the ending time for the trace.
- Specify `Yes` in the `Repeat?` field to indicate that the trace should be repeated every day at the times specified; select `No` to enable fields on the `Periodic job options` tab.

Create trace...

Trace options | **Schedule** | Periodic job options

Start time

End time

Repeat? This option will allow you to schedule periodic trace job.

Fig. 2: The Create trace Schedule tab

Create trace...

Trace options | Schedule | **Periodic job options**

Days

Week days

Month days

Months

Times

Hours

Minutes

Schedules are specified using a **cron-style** format.

- For each selected time or date element, the schedule will execute.
e.g. To execute at 5 minutes past every hour, simply select '05' in the Minutes list box.
- Values from more than one field may be specified in order to further control the schedule.
e.g. To execute at 12:05 and 14:05 every Monday and Thursday, you would click minute 05, hours 12 and 14, and weekdays Monday and Thursday.
- For additional flexibility, the Month days check list includes an extra Last day option. This matches the last day of the month, whether it happens to be the 28th, 29th, 30th or 31st.

Fig. 3: The Create trace Periodic job options tab

Fields on the **Periodic job** options tab specify scheduling details about a recurring trace. Use fields in the **Days** section to specify the days on which the job will execute:

- Click in the **Week days** field to select the days of the week on which the trace will execute.
- Click in the **Month days** field to select the days of the month on which the trace will execute.
- Click in the **Months** field to select the months in which the trace will execute.

Use fields in the **Times** section to specify a time schedule for the trace execution:

- Click in the **Hours** field to select the hours at which the trace will execute.
- Click in the **Minutes** field to select the hours at which the trace will execute.

When you've completed the **Create trace...** dialog, click **Create** to start the newly defined trace or to schedule the trace for a later time.

#	Start Time	Duration (ms)	Query	Rows Affected	User	Database	PID	File System Read	File System Write	Page Fault
1	2020-04-24 01:54:57.556323-07	1.273133	SELECT heartbeat_inte...	1	agent1	pem	91666	48	0	6
2	2020-04-24 01:54:57.627954-07	12.234771	/pgdash/ SELECT ...	5	enterprisedb	postgres	33485	0	0	0
3	2020-04-24 01:54:57.647487-07	0.00245	SELECT 1	1	enterprisedb	pem	30543	0	0	0
4	2020-04-24 01:54:57.659666-07	0.004035	SELECT pg_has_role(p...	1	enterprisedb	pem	30543	0	0	0
5	2020-04-24 01:54:57.660344-07	0.00083	SELECT 1	1	enterprisedb	pem	30543	0	0	0
6	2020-04-24 01:54:57.69393-07	0.917116	SET DateStyle=ISO, SE...	1	enterprisedb	postgres	33900	0	0	0
7	2020-04-24 01:54:57.696903-07	0.016561	SELECT db_oid as did, ...	1	enterprisedb	postgres	33900	0	0	0
8	2020-04-24 01:54:57.69824-07	0.027168	SELECT oid as id, rolna...	1	enterprisedb	postgres	33900	0	0	0
9	2020-04-24 01:54:58.633668-07	12.019085	/pgdash/ SELECT ...	5	enterprisedb	postgres	33485	0	0	0
10	2020-04-24 01:54:58.814973-07	0.001999	SELECT 1	1	enterprisedb	pem	30543	0	0	0
11	2020-04-24 01:54:58.826576-07	0.050517	SELECT pg_has_role(p...	23	enterprisedb	pem	30543	0	0	0
12	2020-04-24 01:54:59.622713-07	11.296904	/pgdash/ SELECT ...	5	enterprisedb	postgres	33485	0	0	0
13	2020-04-24 01:55:00.137269-07	0.001639	SELECT 1	1	enterprisedb	postgres	32578	0	0	0
14	2020-04-24 01:55:01.250787-07	11.271025	/pgdash/ SELECT ...	5	enterprisedb	postgres	33485	0	0	0
15	2020-04-24 01:55:02.114481-07	0.627253	WITH agent_info AS (...)	1	agent1	pem	91666	680	0	52
16	2020-04-24 01:55:02.236089-07	12.07948	/pgdash/ SELECT ...	5	enterprisedb	postgres	33485	0	0	0
17	2020-04-24 01:55:02.628516-07	13.478983	SELECT * FROM (SEL...	3	agent1	pem	91666	1568	0	49
18	2020-04-24 01:55:03.232281-07	0.049985	SELECT * FROM pem.j...	1	agent1	pem	91666	0	0	0
19	2020-04-24 01:55:03.235696-07	0.011202	SELECT nextval(pem.j...	1	agent1	pem	91666	0	0	0
20	2020-04-24 01:55:03.239847-07	18.327522	/pgdash/ SELECT ...	5	enterprisedb	postgres	33485	0	0	0
21	2020-04-24 01:55:03.243198-07	0.128944	INSERT INTO pem.jobs...	1	agent1	pem	91666	32	0	1
22	2020-04-24 01:55:03.263871-07	0.03972	SELECT log_directory, l...	1	agent1	pem	91666	0	0	0

Fig. 4: The SQL Profiler tab, displaying the trace results

If you elect to execute the trace immediately, the trace results will display in the PEM client.

9.1.2 Opening an existing trace

To view a previous trace, highlight the name of the profiled database in the PEM client tree control; navigate through the **Management** menu to the **SQL Profiler** pull-aside menu, and select **Open trace...** You can also use the **SQL Profiler** toolbar menu to open a trace; select the **Open trace...** option. The **Open trace...** dialog opens.

Highlight an entry in the trace list and click **Open** to open the selected trace. The selected trace opens in the **SQL Profiler** tab.

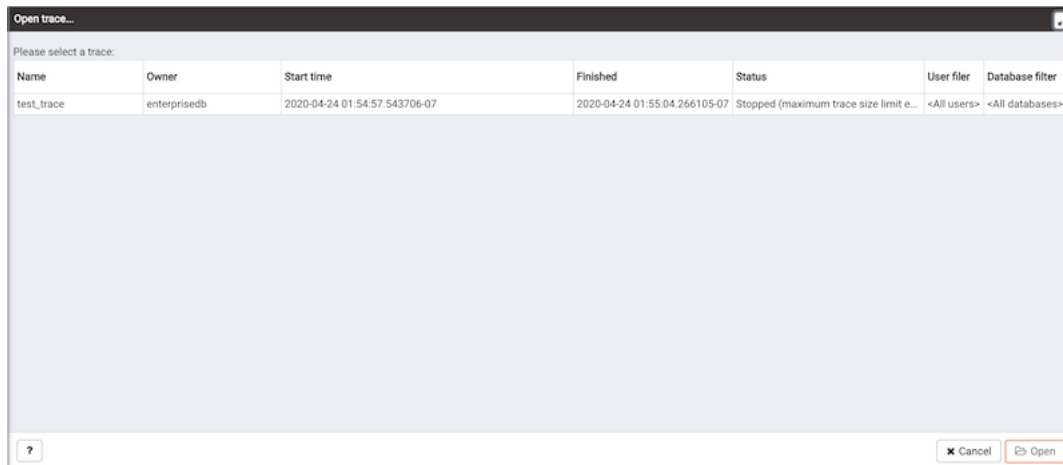


Fig. 5: Opening an existing trace

9.1.3 Filtering a trace

A filter is a named set of (one or more) rules, each of which can hide events from the trace view. When you apply a filter to a trace, the hidden events are not removed from the trace, but are merely excluded from the display.

Click the Filter icon to open the Trace Filter dialog and create a rule (or set of rules) that define a filter. Each rule will screen the events within the current trace based on the identity of the role that invoked the event, or the query type invoked during the event.

To open an existing filter, select the Open button; to define a new filter, click the Add (+) icon to add a row to the table displayed on the General tab and provide rule details:

- Use the Type drop-down listbox to specify the trace field that the filter rule will apply to.
- Use the Condition drop-down listbox to specify the type of operator that SQL Profiler will apply to the Value when it filters the trace:
 - Select **Matches** to filter events that contain the specified Value.
 - Select **Does not match** to filter events that do not contain the specified Value.
 - Select **Is equal** to to filter events that contain an exact match to the string specified in the Value field.
 - Select **Is not equal** to to filter events that do not contain an exact match to the string specified in the Value field.
 - Select **Starts with** to filter events that begin with the string specified in the Value field.
 - Select **Does not start with** to filter events that do not begin with the string specified in the Value field.
 - Select **Less than** to filter events that have a numeric value less than the number specified in the Value field.
 - Select **Greater than** to filter events that have a numeric value greater than the number specified in the Value field.
 - Select **Less than or equal** to to filter events that have a numeric value less than or equal to the number specified in the Value field.
 - Select **Greater than or equal** to to filter events that have a numeric value greater than or equal to the number specified in the Value field.
- Use the Value field to specify the string, number or regular expression that SQL Profiler will search for.

When you've finished defining a rule, click the Add (+) icon to add another rule to the filter. To delete a rule from a filter, highlight the rule and click the Delete icon.

Click the Save button to save the filter definition to a file without applying the filter; to apply the filter, click OK . Select Cancel to exit the dialog and discard any changes to the filter.

9.1.4 Deleting a trace

To delete a trace, highlight the name of the profiled database in the PEM client tree control; navigate through the Management menu to the SQL Profiler pull-aside menu, and select Delete trace(s) You can also use the SQL Profiler toolbar menu to delete a trace; select the Delete trace(s) . . . option. The Delete traces dialog opens.

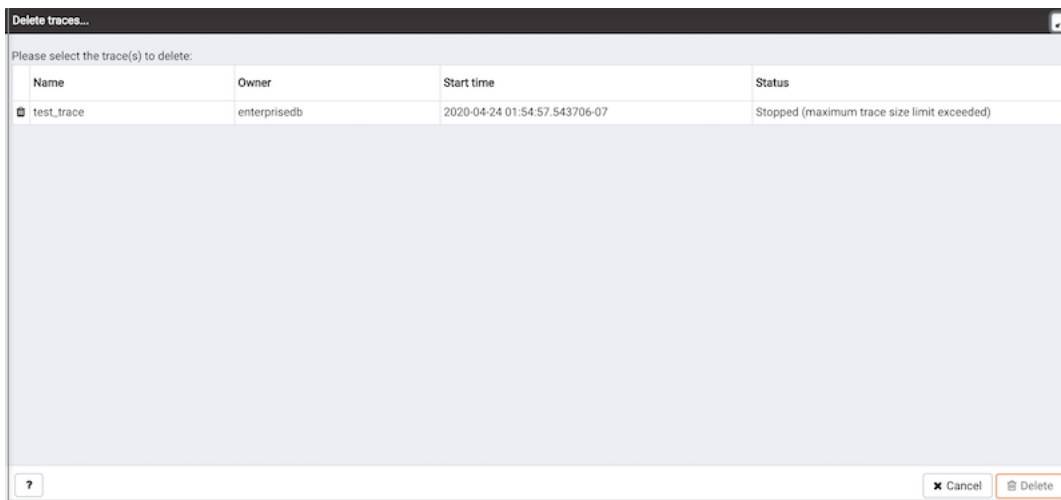


Fig. 6: The Delete traces... dialog

Click the icon to the left of a trace name to mark one or more traces for deletion and click Delete . The PEM client will acknowledge that the selected traces have been deleted.

9.1.5 Viewing scheduled traces

To view a list of scheduled traces, highlight the name of the profiled database in the PEM client tree control; navigate through the Management menu to the SQL Profiler pull-aside menu, and select Scheduled traces You can also use the SQL Profiler toolbar menu to the list; select the Scheduled traces . . . option.

The Scheduled traces . . . dialog displays a list of the traces that are awaiting execution. Click the edit button to the left of a trace name to access detailed information about the trace:

- The Status field lists the status of the current trace.
- The Enabled? switch displays Yes if the trace is enabled; No if it is disabled.
- The Name field displays the name of the trace.
- The Agent field displays the name of the agent responsible for executing the trace.
- The Last run field displays the date and time of the last execution of the trace.
- The Next run field displays the date and time of the next scheduled trace.
- The Created field displays the date and time that the trace was defined.

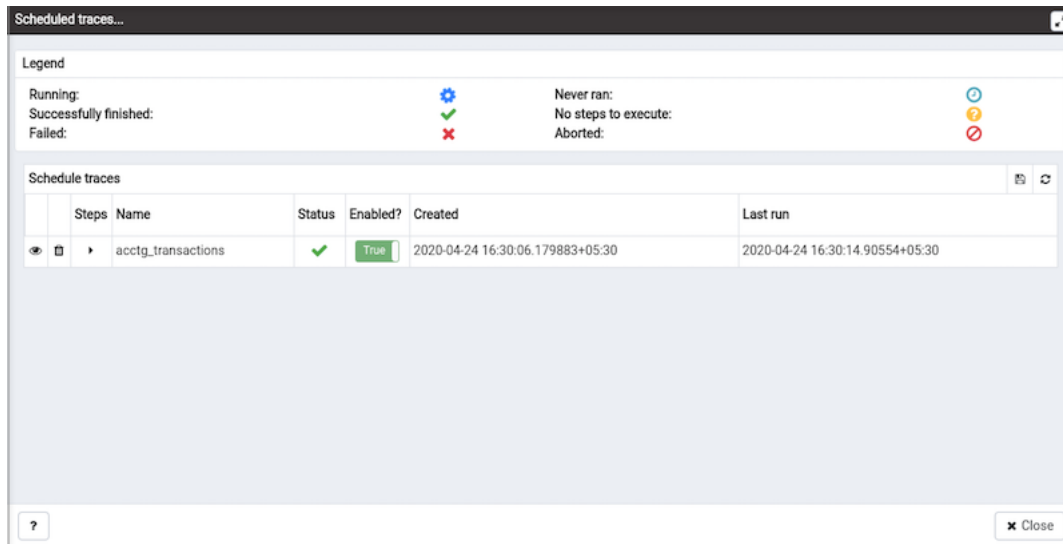


Fig. 7: Reviewing scheduled traces

9.2 Using the index advisor

Index Advisor is distributed with Advanced Server 9.0 and above. Index Advisor works with SQL Profiler by examining collected SQL statements and making indexing recommendations for any underlying tables to improve SQL response time. The Index Advisor works on all DML (INSERT, UPDATE, DELETE) and SELECT statements that are invoked by a superuser.

Diagnostic output from the Index Advisor includes:

- Forecasted performance benefits from any recommended indexes
- The predicted size of any recommended indexes
- DDL statements you can use to create the recommended indexes

Before using Index Advisor, you must:

1. Modify the `postgresql.conf` file on each Advanced Server host, adding the `index_advisor` library to the `shared_preload_libraries` parameter.
2. Install the `Index Advisor contrib` module. To install the module, use the `psql` client or PEM Query Tool to connect to the database, and invoke the following command:

```
\i <complete_path>/share/contrib/index_advisor.sql
```

3. Restart the server for your changes to take effect.

Index Advisor can make indexing recommendations based on trace data captured by SQL Profiler. Simply highlight one or more queries in the SQL Profiler Trace Data pane, and click the Index Advisor toolbar button (or select Index Advisor from the View menu). For detailed usage information about Index Advisor, please see the EDB Postgres Advanced Server Guide.

Please note: Index Advisor cannot analyze statements invoked by a non-superuser. If you attempt to analyze statements invoked by a non-superuser, the server log will include the following error:

```
ERROR: access to library "index_advisor" is not allowed
```

For more information about configuring and using Index Advisor, please see the EDB Postgres Advanced Server Guide, available from EDB at:

<https://www.enterprisedb.com/docs>

TUNING WIZARD

The Tuning Wizard reviews your PostgreSQL or Advanced Server installation, and recommends a set of configuration options that will help tune the installation to best suit its anticipated workload. Please note that benchmarking systems or systems with a high work load may require additional manual tuning to reach optimum performance.

Before using the Tuning Wizard, you must specify the name of the service in the Service ID field on the Advanced tab of the server's Properties dialog. PEM will use the service name when restarting the service after tuning.

The Tuning Wizard can only make recommendations for those servers that reside on the same server as their bound PEM agent. If you have specified a value of Yes in the Remote monitoring field when defining your server, the server will not be displayed in the Tuning Wizard tree control.

To open the Tuning Wizard, select **Tuning Wizard...** from the **Management** menu of the PEM client. The Tuning Wizard opens, welcoming you.

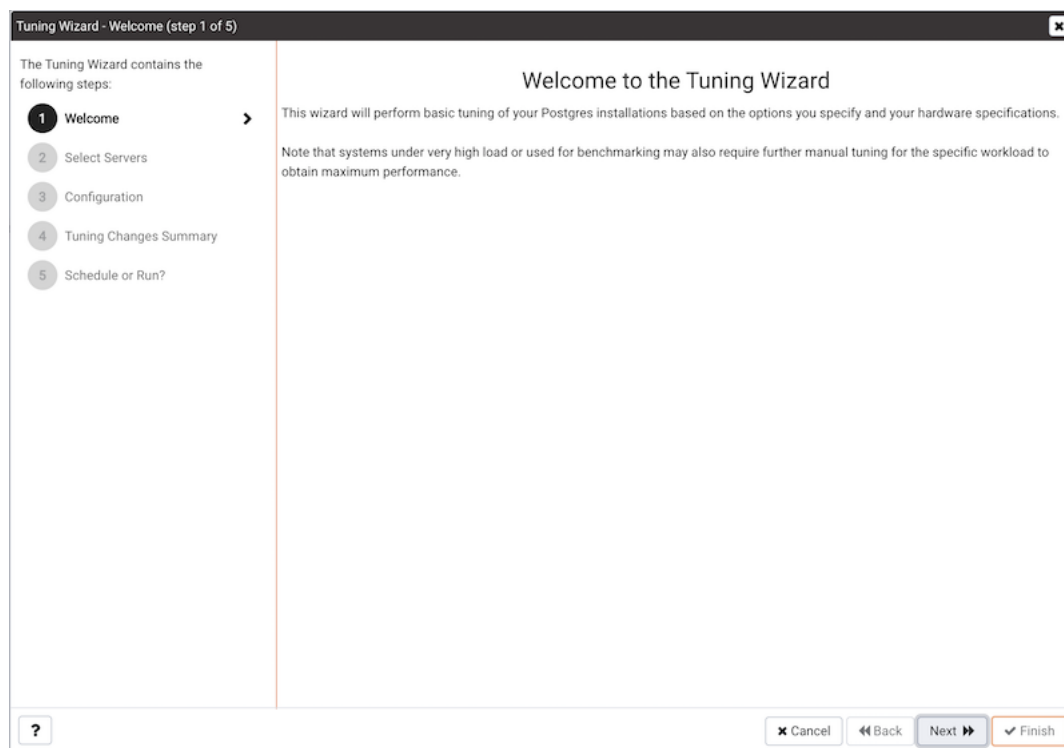


Fig. 1: The Tuning Wizard Welcome dialog

Click **Next** to continue to the server selection dialog.

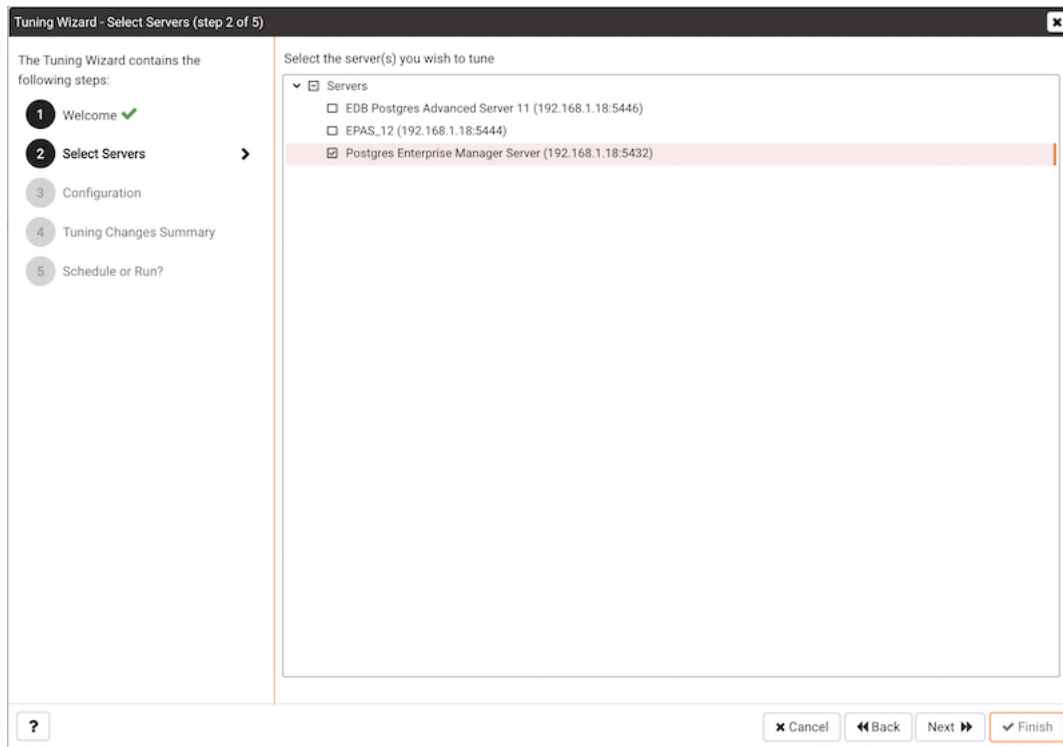


Fig. 2: The Select Servers dialog

Expand the **Servers** node of the tree control to view a list of the servers that are currently monitored by PEM that are available for tuning. Check a box to the left of a server name to select the server for tuning.

Note: The Tuning Wizard displays a red warning symbol to the left of a server name in the tree control if the service name for that server is not provided on the server's Properties dialog.

Click **Next** to continue to the Configuration dialog.

Select an option in the **Machine utilization** field to specify the type of work performed by the selected servers. The type of work performed by the server determines how the tuning wizard will allocate system resources:

- Select **Dedicated** to dedicate the majority of the system resources to the database server.
- Select **Mixed use** to dedicate a moderate amount of system resources to the database server.
- Select **Developer workstation** to dedicate a relatively small amount of system resources to the database server.

Select an option in the **Workload Selection** field to specify the type of workload typically performed on the selected server:

- Select **OLTP** if the selected server is used primarily to process online transaction workloads.
- Select **Mixed** if the selected server provides a mix of transaction processing and data reporting.
- Select **Data warehouse** if the server is used for heavy data reporting.

Click **Next** to continue to the Tuning Changes Summary dialog.

The tree control on the **Tuning Changes Summary** dialog displays the parameter setting modifications recommended for each server analyzed by the Tuning Wizard. Use the checkboxes next to a server or parameter name to select the

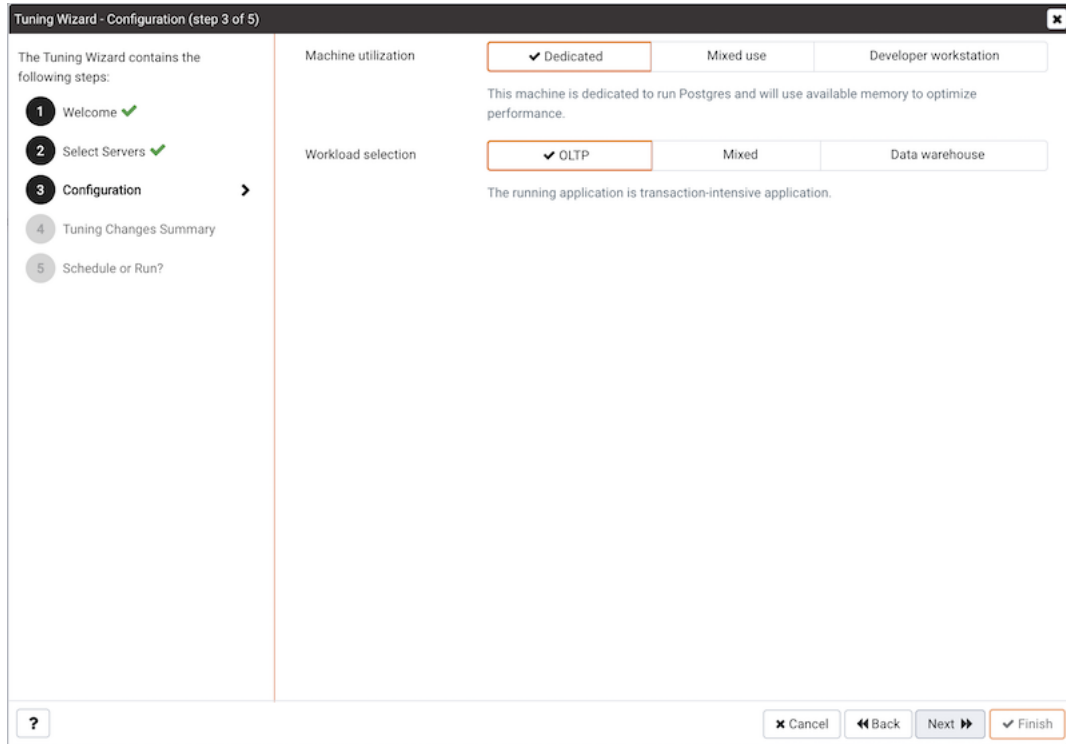


Fig. 3: The Configuration dialog

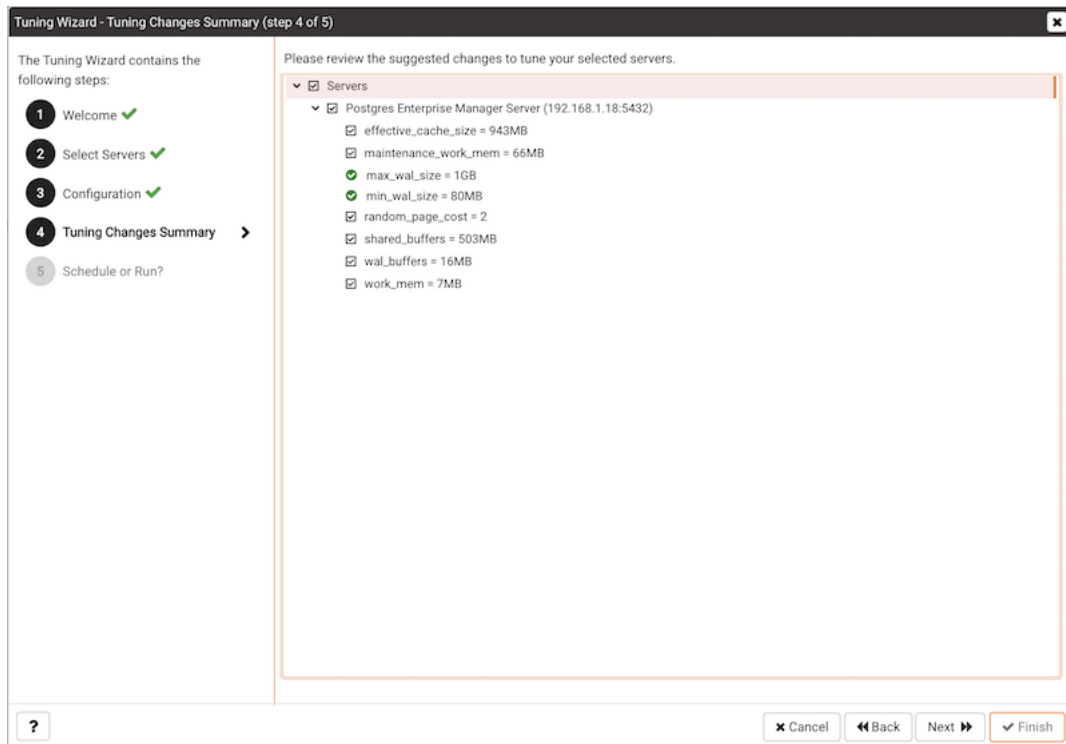


Fig. 4: The Tuning Changes Summary dialog

recommendations that tuning wizard will either include in a preview report or apply:

- A checked box to the left of a parameter name specifies that the Tuning Wizard will include the parameter setting.
- A checked box to the left of a server name specifies that the Tuning Wizard will include all parameter setting recommendations for the specified server.

Specify which Tuning Wizard recommendations you wish to include in a report or apply, and click **Next** to continue.

Use the **Schedule** or **Run?** dialog to either specify a time that PEM will apply the changes, or generate a report that details the recommended changes.

The selected actions will apply to all of the changes noted on the Tuning Changes Summary. If you opt to generate a report, PEM will create a report that contains a list of the current values and recommended modifications to the configuration parameters selected on the Tuning Changes Summary dialog. Note that to implement changes, you will need to invoke the Tuning Wizard a second time, specifying the parameters you wish to modify on the Tuning Changes Summary dialog.

Select **Schedule** changes to view and specify your scheduling options.

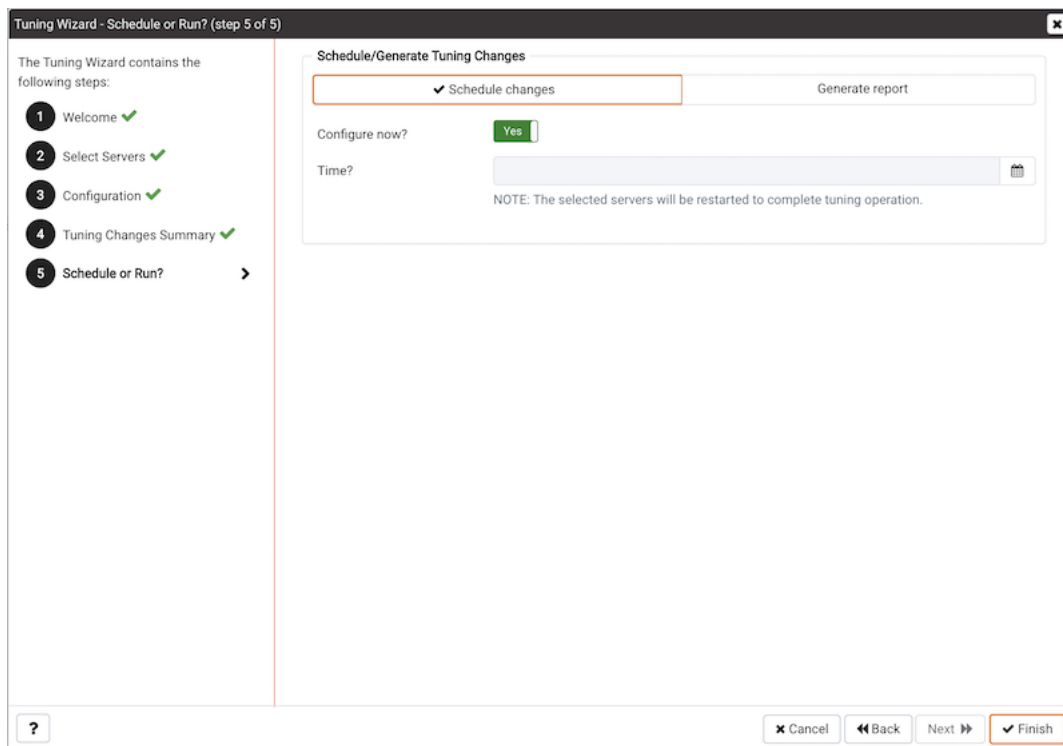


Fig. 5: The Schedule or Run? dialog

You can:

- Set the **Configuration now?** slider to **Yes** to apply the tuning wizard's recommendations and restart the server now.
- Set the **Configuration now?** slider to **No** to enable the **Time?** field and use the calendar selector to specify a time for PEM to apply the tuning wizard's recommendations and restart the server. Note that if you schedule a time for the changes to be applied, you will not be provided with a preview of the change recommendations.

Select **Generate** report to view your report options.

You can:

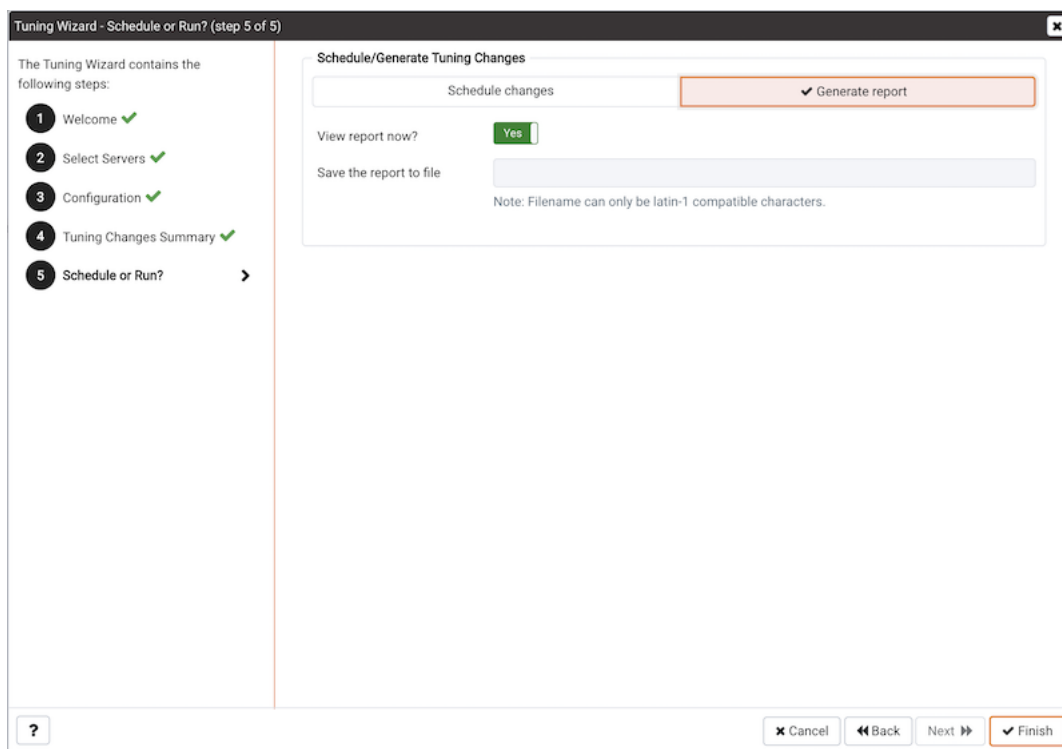


Fig. 6: The Schedule or Run? dialog

- Set the **View report now?** slider to **Yes** to display the Tuning Wizard report onscreen.
- Set the **View report now?** slider to **No** to enable the **Save the report to file** field and use the calendar selector to specify a file name and location to which PEM will write the Tuning Wizard report.

Click the **Finish** button to either apply the Tuning Wizard's modifications or generate a report and exit the Tuning Wizard.

Tuning Wizard Report		
Generated On: 2020-04-27 16:19:52		Go to: Postgres Enterprise Manager Server
Summary		
Number of servers selected: 1 Machine utilization: Dedicated Workload profile: OLTP		
Server: Postgres Enterprise Manager Server (192.168.1.18:5432)		
GUC Parameter	Original Value	Recommended Value
effective_cache_size	4096MB	943MB
maintenance_work_mem	64MB	66MB
random_page_cost	4	2
shared_buffers	128MB	503MB
wal_buffers	4MB	16MB
work_mem	4MB	7MB

Fig. 7: The Tuning Wizard report

You can confirm that Tuning Wizard has implemented the recommended changes by reviewing the `postgresql.conf` file for the modified server. The Tuning Wizard adds a comment above each modified parameter in the `postgresql.conf` file when the change is applied.

You can also confirm a parameter value by querying the server. For example, to confirm the value of the `shared_buffers`

```

root@localhost:/opt/PostgresPlus/9.5AS/data
File Edit View Search Terminal Help
# The value for shared_buffers was changed by the Postgres Enterprise Manager Tuning Wizard at 2017-03-06 09:15:32
#shared_buffers = 196MB
# The value for shared_buffers was changed by the Postgres Enterprise Manager Tuning Wizard at 2017-03-06 09:18:23
shared_buffers = 196MB

#huge_pages = try                                # (change requires restart)
                                                # on, off, or try
                                                # (change requires restart)
#temp_buffers = 8MB                              # min 800kB
#max_prepared_transactions = 0                   # zero disables the feature
                                                # (change requires restart)
# Note: Increasing max_prepared_transactions costs ~600 bytes of shared memory
# per transaction slot, plus lock space (see max_locks_per_transaction).
# It is not advisable to set max_prepared_transactions nonzero unless you
# actively intend to use prepared transactions.
#work_mem = 4MB                                  # min 64kB
# The value for work_mem was changed by the Postgres Enterprise Manager Tuning Wizard at 2017-03-06 09:15:32
#work_mem = 3MB
# The value for work_mem was changed by the Postgres Enterprise Manager Tuning Wizard at 2017-03-06 09:18:23
work_mem = 3MB
#maintenance_work_mem = 64MB                     # min 1MB
# The value for maintenance_work_mem was changed by the Postgres Enterprise Manager Tuning Wizard at 2017-03-06 09
:15:32
#maintenance_work_mem = 25MB
--More--(21%)

```

Fig. 8: Confirming a change in the postgresql.conf file

parameter, open a SQL command line using either the Query Tool (accessed through the Tools menu) or the psql client, and issue the command:

```
SHOW shared_buffers;
```

The value returned by the server will confirm that the parameter has been modified.

POSTGRES EXPERT - BEST PRACTICE ENFORCEMENT

The Postgres Expert utility provides expert advice on how to best configure your Postgres servers for optimal performance, security, and more. Postgres Expert serves as a PostgreSQL ‘DBA in a box’ by analyzing your servers for deviations in best practices. Postgres Expert contains three specialized Experts:

- The Configuration Expert.
- The Schema Expert.
- The Security Expert.

You can select specific rules for each Expert to analyze, or accept all rules, and then review Postgres Expert reports detailing any best practice issues that require your attention.

11.1 Using the Postgres Expert wizard

To use the Postgres Expert wizard select the **Postgres Expert** option from the **Management** menu in the PEM client. When the wizard’s **Welcome** window opens, click **Next** to continue.

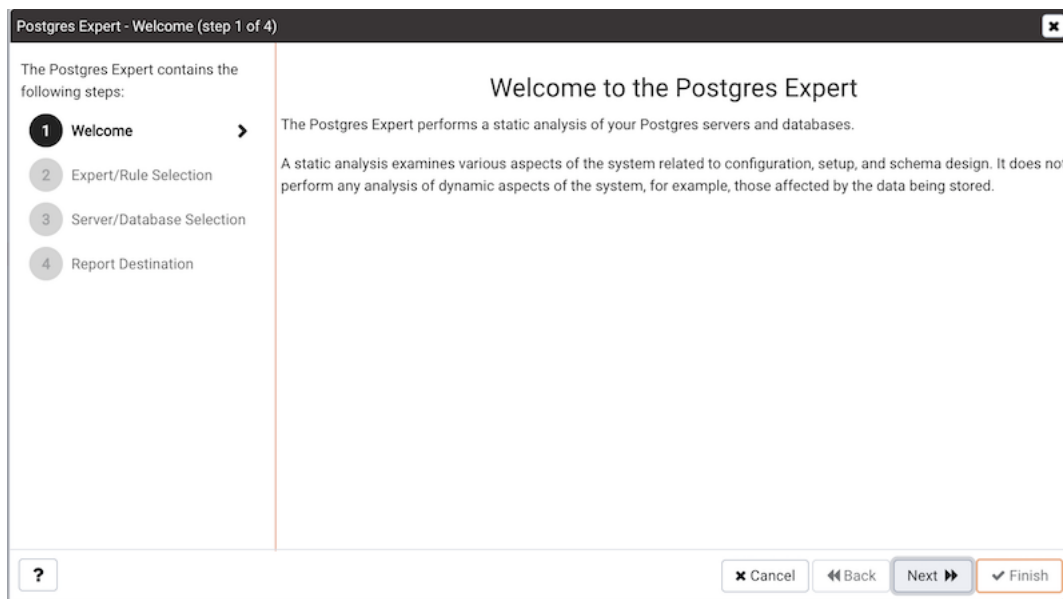


Fig. 1: The Postgres Expert Welcome dialog

The wizard displays a tree control that allows you to choose the **Experts** and **Rules** with which Postgres Expert will evaluate the specified server or database.

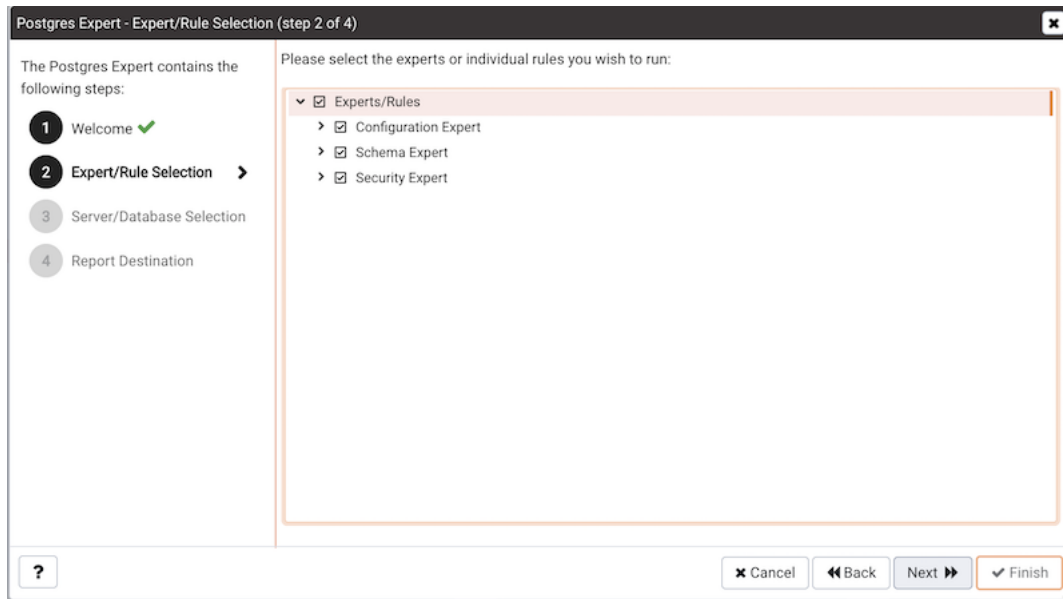


Fig. 2: The PEM Agent Installer's Welcome dialog

The tree control categorizes the rules under three Expert headings:

- Select from the **Configuration Expert** rules to analyze the parameter settings of the server or operating system to find any adjustments that might improve system performance.
- Select from the **Schema Expert** rules to analyze schema objects (locating missing primary keys, foreign keys without indexes, etc).
- Select from the **Security Expert** rules to review the system to find security vulnerabilities.

Use the checkmark indicator to the left of an expert or rule to indicate that the Postgres Expert should analyze the configuration of the selected servers for any best practice deviations related to the checked item.

You can:

- Check the box next to the name of an expert to select or deselect all of the configuration items listed under that node of the tree control.
- Check the box next to **Servers/Databases** to instruct Postgres Expert to review the selected server for all of the items in the tree control.
- Deselect the box next to **Servers/Databases** to to un-check all of the rules; then, navigate through the tree control, specifying only the items that you wish Postgres Expert to evaluate.

After making your selections, click **Next** to continue to the Server/Databases tree control.

Select or de-select the servers and databases that you would like Postgres Expert to analyze. If you select multiple servers or databases, the resulting report will contain a separate analysis of each target. When you've finished, click **Next** to select a report destination.

You can select the default option and click **Finish** to view an onscreen report from Postgres Expert, or check the box next to **Download the report** to save a copy of the report to an HTML file for later use. If you choose to save the report to a file, the download will begin immediately. The file will be saved in your default download directory.

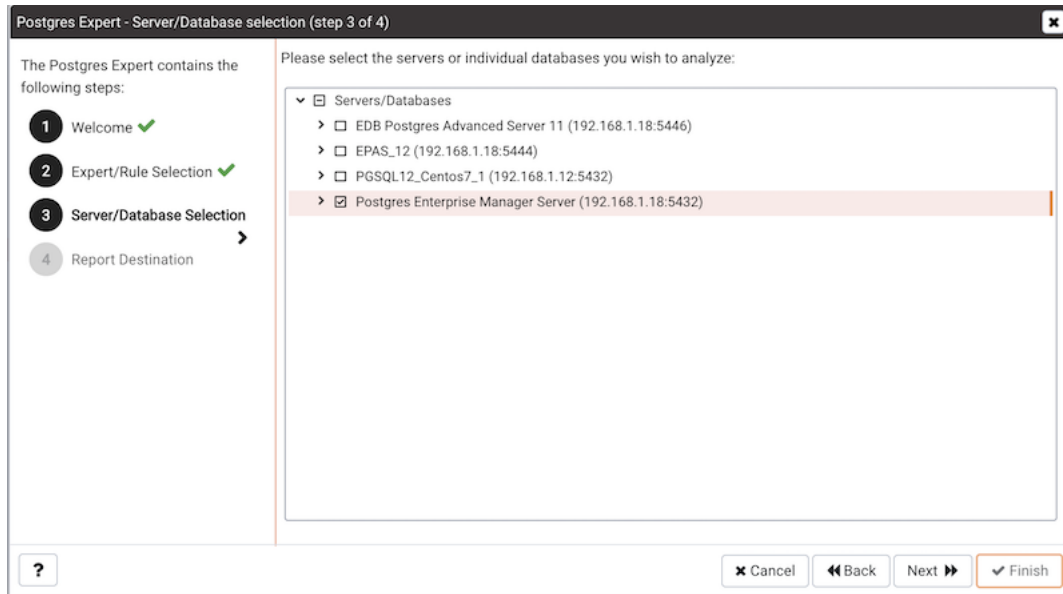


Fig. 3: The Servers/Databases dialog

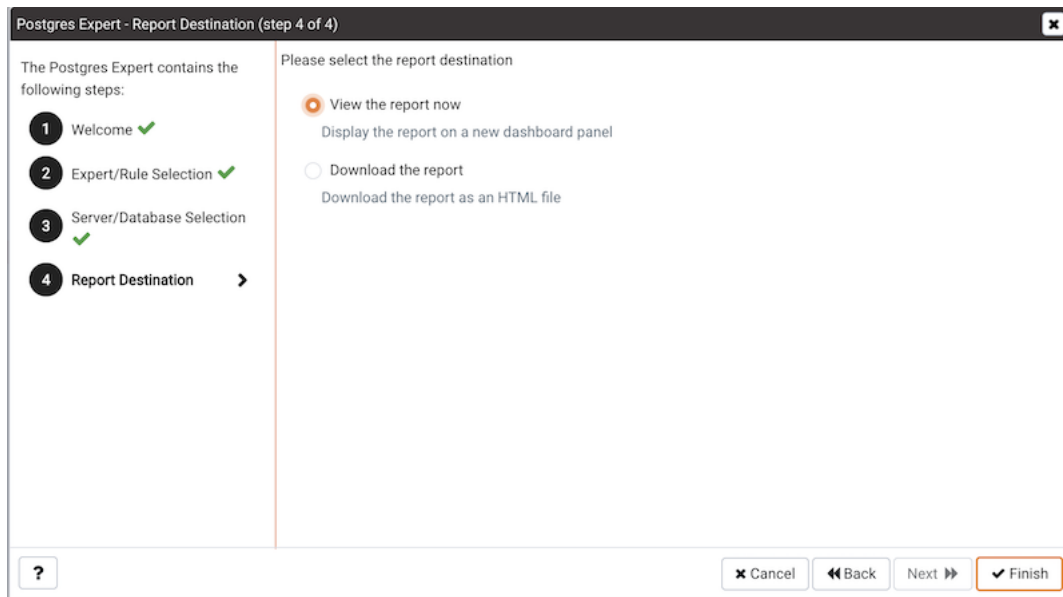


Fig. 4: Specify a report destination

11.2 Reviewing Postgres Expert recommendations

Postgres Expert produces an easily navigated report that contains an analysis of the selected rules, categorized by high, medium, and low severities, for the selected servers.

Postgres Expert Report

Generated On: 2020-04-27 16:57:47

Go to: Postgres Enterprise Manager Server

Summary

Servers Tested: 1

Rules Checked: 31

High Alerts: 1

Medium Alerts: 3

Low Alerts: 2

Server: Postgres Enterprise Manager Server (192.168.1.18:5432)

Advisor: Configuration Expert

Rule	Database	Severity
> Check checkpoint_completion_target	-	Medium
> Check effective_cache_size	-	Medium
> Check effective_io_concurrency	-	Low
> Check reducing_random_page_cost	-	Low

Advisor: Schema Expert

Rule	Database	Severity
> Check data and transaction log on same drive	-	High
> Check for missing foreign key indexes	db01	Medium

Fig. 5: The Postgres Expert report

The report header contains a summary of the report, and includes the date and time that the report was generated, the number of rules analyzed, and the number of deviations from best practices found by Postgres Expert. Use the Jump to drop-down listbox to select a server to navigate to the section of the report that targets recommendations for that server.

The body of the report contains the detailed findings for each server selected for analysis. The findings are sorted by Expert; within each Expert heading, any rule violations are ranked by Severity.

Click on each rule in the Postgres Expert report to display details and recommendations for that rule. Within each rule, section headings display:

- The **Advisor** section lists the name of the Postgres Expert advisor that prompted the recommendation.
- The **Trigger** section displays a description of the rule that raised the alert.
- The **Recommended Value** section displays the value to which Postgres Expert recommends setting the selected parameter.
- The **Description** section displays information and advice about the parameter that caused the alert.
- The **Current Values** section displays the current value(s) of any parameter(s) that influence the Postgres Expert's evaluation.

Postgres Expert Report

Generated On: 2020-04-27 16:57:47

Go to: Postgres Enterprise Manager Server

Summary

Servers Tested: 1

Rules Checked: 31

High Alerts: 1

Medium Alerts: 3

Low Alerts: 2

Server: Postgres Enterprise Manager Server (192.168.1.18:5432)

Advisor: Configuration Expert

Rule	Database	Severity				
Check checkpoint_completion_target Recommended Value: Consider adjusting checkpoint_completion_target. Current Values: <table> <thead> <tr> <th>Settings</th> <th>Value</th> </tr> </thead> <tbody> <tr> <td>checkpoint_completion_target</td> <td>0.5</td> </tr> </tbody> </table>	Settings	Value	checkpoint_completion_target	0.5	-	Medium
Settings	Value					
checkpoint_completion_target	0.5					
Trigger: checkpoint_completion_target != 0.9 Description: In order to ensure reliable and efficient crash recovery, PostgreSQL periodically writes all dirty buffers to disk. This process is called a checkpoint. Beginning in PostgreSQL 8.3, checkpoints take place over an extended period of time in order to avoid swamping the I/O system. checkpoint_completion_target controls the rate at which the checkpoint is performed, as a function of the time remaining before the next checkpoint is due to start. A value of 0 indicates that the checkpoint should be performed as quickly as possible, whereas a value of 1 indicates that the checkpoint should complete just as the next checkpoint is scheduled to start. It is usually beneficial to spread the checkpoint out as much as possible; however, if checkpoint_completion_target is set to a value greater than 0.9, unexpected delays near the end of the checkpoint process can cause the checkpoint to fail to complete before the next one needs to start. Because of this, the recommended setting is 0.9.						
Check effective_cache_size	-	Medium				
Check effective_io_concurrency	-	Low				
Check reducing_random_page_cost	-	Low				

Advisor: Schema Expert

Rule	Database	Severity
Check data and transaction log on same drive	-	High
Check for missing foreign key indexes	db01	Medium

Fig. 6: The detailed recommendation for a rule

MONITORING BDR NODES

BDR (Bi-Directional Replication) is a PostgreSQL extension that provides a multi-master replication between the Postgres clusters. Before you monitor BDR through PEM console, you must ensure that your BDR nodes are up and running. For more information about BDR, please see [BDR Documentation](#) .

You can configure PEM to display status information about one or more BDR Nodes via dashboards from PEM 8.1.0 and BDR 3.7.9 onwards.

To configure PEM to monitor BDR Nodes , use the PEM Web Client to create a server definition. Use the tabs on the New Server Registration dialog to specify general connection properties for the BDR Node with the following exceptions:

- Specify the BDR-enabled database name in the Database field of the PEM Agent tab.
- Specify the user having `bdr_monitor` or `bdr_superuser` role in the username field of the PEM Agent tab.

After saving the server definition, the BDR Node will be included in the list of servers under the PEM Server Directory in the PEM client object browser tree. You can monitor the BDR Nodes from BDR dashboards.

To include monitoring information on the BDR dashboards, you must enable the relative probes for each BDR Group. You can see the complete list of BDR Probes [here](#) .

To enable a probe, right click on the node name, and select **Manage Probes** from the **Management** menu.

To monitor the BDR Node, right click on the name of the BDR Node in the Object browser tree control and navigate through the Dashboards menu to select **BDR Admin** or **BDR Group Monitoring** or **BDR Node Monitoring** dashboard.

edb_notranlate_0 .. Tip “New Feature “:: Monitoring Barman is available in PEM 8.4.0 and later.

Postgres Enterprise Manager (PEM) is designed to assist database administrators, system architects, and performance analysts when administering, monitoring, and tuning PostgreSQL and Advanced Server database servers.

Barman (Backup and Recovery Manager) is an open-source administration tool for remote backups and disaster recovery of PostgreSQL servers in business-critical environments. It relies on PostgreSQL’s Point In Time Recovery technology, allowing DBAs to remotely manage a complete catalogue of backups and the recovery phase of multiple remote servers – all from one location. For more information about Barman, see

[Barman docs](#) .

Starting with version 8.4, you can monitor a Barman server through PEM console. You can monitor your Barman server using the PEM console.

Before you manage a Barman server through PEM console, your system must meet certain requirements. See

- *[Prerequisites for monitoring Barman](#)*

You must add a Barman server to the PEM console whose backup you want to manage with Barman. See

- *[Configuring a Barman Server](#)*

After you configure the Barman server, you will be able to view the details of the backups in the dashboard. See

- *[Viewing the Barman Server details on a PEM dashboard](#)*

PREREQUISITES FOR MONITORING BARMAN

Before adding a Barman server to the PEM console,

- You must manually install and configure Barman on the Barman host. For more information about installing and configuring Barman, please see the Barman documentation .
- Install the `pg-backup-api` tool on Barman host.

CONFIGURING A BARMAN SERVER

You can configure and edit your Barman server using:

- PEM web client
- `pemworker` command line

14.1 Using PEM web client

14.1.1 Configure

You can use the `Create-BARMAN` server dialog to register an existing Barman server with the PEM server. To access the dialog, right-click on the `BARMAN` Servers node and select `Create-BARMAN` Server .

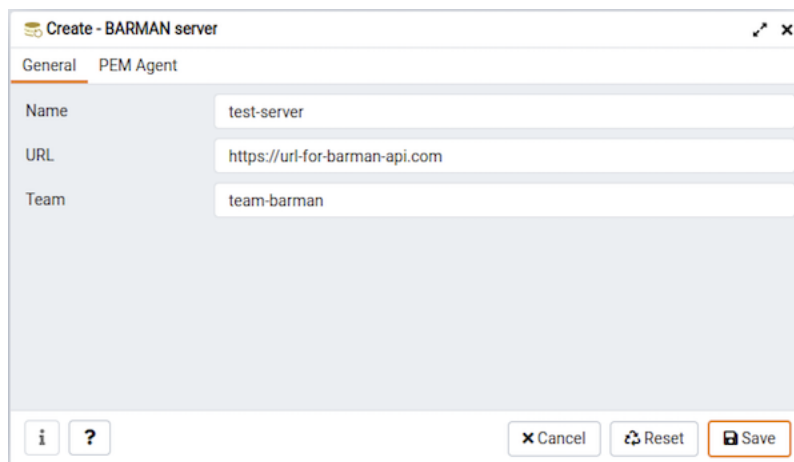


Fig. 1: Create-BARMAN server dialog - General tab

Use the fields on the `General` tab to describe the general properties of the Barman server:

- Use the `Name` field to specify a user-friendly name for the server. The name identifies the server in the browser tree.
- Use the `URL` field to specify the URL of the host where Barman is installed.
- Use the `Team` field to specify a PostgreSQL role name. Only PEM users who are members of this role, who created the server initially, or have superuser privileges on the PEM server will see this server when they log on to PEM. If this field is left blank, all PEM users see the server.

Use the fields on the `PEM Agent` tab to specify connection details for the PEM Agent:

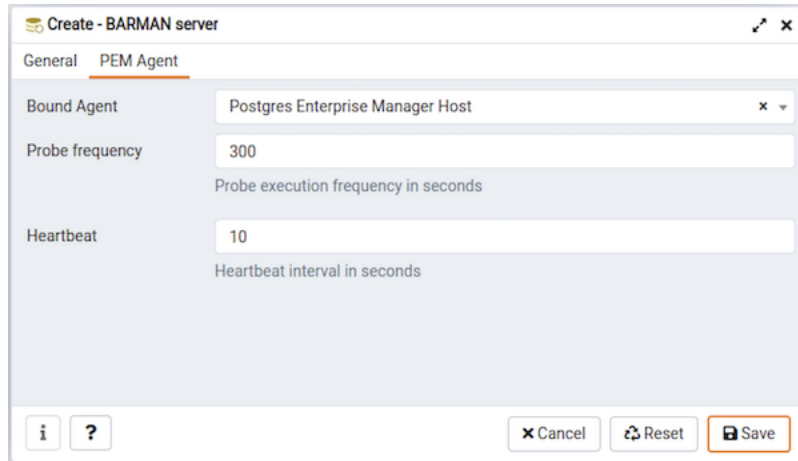


Fig. 2: Create-BARMAN server dialog - PEM Agent tab

- Use the **Bound Agent** field to select the agent that you want to configure as a Barman server. Only those PEM agents that are supported for Barman are listed in the drop-down list.
- Use the **Probe Frequency** field to specify the number of seconds to execute the probes with the specified interval.
- Use the **Heartbeat** field to specify the number of seconds interval to check the availability of PEM agent.

Note: After registering the Barman server you need to restart the PEM agent.

14.1.2 Editing

To edit your Barman server, select your Barman server from the browser tree, right click and select **Properties**.

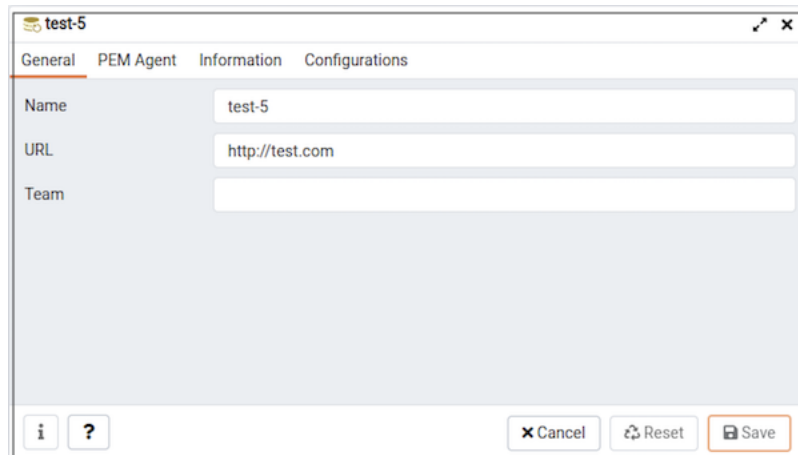


Fig. 3: BARMAN server properties - General tab

- Use the fields on the **PEM Agent** tab to modify the **Bound Agent**, **Probe Frequency**, and **Heartbeat**. Only the owner of the Barman server can modify the fields on PEM Agent tab.

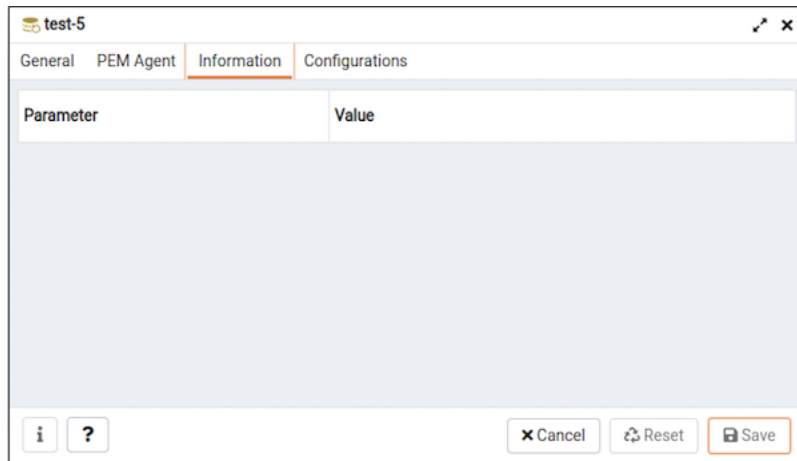


Fig. 4: BARMAN server properties - Information tab

- Use the fields on Information tab to view the detailed information about your Barman server. This tab gets populated whenever the Barman related probes are executed. You cannot modify any of the fields on the Information tab.
- Use the fields on Configuration tab to view the configuration settings of your Barman server. This tab gets populated whenever the Barman related probes are executed. You cannot modify any of the fields on the Configuration tab.

Note: After registering the Barman server you need to restart the PEM agent.

14.2 Using pemworker command line

You can configure Barman server using pemworker command line options.

```
asheshvashi@pem:~/PEM/agent$ ./pemworker --update-barman --help
./pemworker --update-barman [barman-update-options]
```

barman-update-options:

```
--id <barman-id> (ID for the existing BARMAN API pg-backup-api)
--api-url <url> (URL of the BARMAN API pg-backup-api)
--probe-execution-frequency <interval> (Default: 30, Probe the BARMAN API pg-backup-
→api at regular interval in seconds and fetch the metrics.)
--heartbeat-interval <interval> (Default: 10, Ping the BARMAN API pg-backup-api status.
→API at a regular interval in seconds for checking its availability.)
--ssl-crt <certificate_file> (SSL certificate file for the BARMAN API.)
--ssl-key <key_file> (Private SSL key for the BARMAN API.)
--ssl-ca-cert <ca_file> (CA certificate to verify peer against the BARMAN API.)
--config-file/-c <config_file> (Path to the agent configuration file.)
```

```
asheshvashi@pem:~/PEM/agent$ ./pemworker --unregister-barman --help
./pemworker --unregister-barman [barman-unregistration-options]
```

barman-unregistration-options:

(continues on next page)

test-5

General
PEM Agent
Information
Configurations

Parameter	Value
backup_method	rsync
backup_options	concurrent_backup
barman_home	/var/lib/barman
barman_user	barman
basebackup_retry_sleep	30
basebackup_retry_times	3
compression	pigz
configuration_files_directory	/etc/barman.d
errors_list	[]
immediate_checkpoint	False
last_backup_maximum_age	1 WEEK
log_file	/var/log/barman/barman.log
minimum_redundancy	3
network_compression	False
parallel_jobs	1
path_prefix	/usr/lib/postgresql/11/bin
recovery_options	get-wal
retention_policy	RECOVERY WINDOW OF 4 WEEKS
reuse_backup	link

i
?
Cancel
Reset
Save

Fig. 5: BARMAN server properties - Configuration tab

(continued from previous page)

```

--id <barman-id> (ID for the existing BARMAN API, registered with the PEM Server.pg-
↳ backup-api)
--config-file/-c <config_file> (Path to the agent configuration file.)

asheshvashi@pem:~/PEM/agent$ ./pemworker --register-barman --help
./pemworker --register-barman [barman-registration-options]

barman-registration-options:
--api-url <url> (URL of the BARMAN API pg-backup-api)
--description <name> (Description to show on the UI User interface for the BARMAN API.)
--probe-execution-frequency <interval> (Default: 30, Probe the BARMAN API pg-backup-
↳ api at regular interval in seconds and fetch the metrics.)
--heartbeat-interval <interval> (Default: 10, Ping the BARMAN API pg-backup-api status.
↳ API at a regular interval in seconds for checking its availability.)
--ssl-crt <certificate_file> (SSL certificate file for the BARMAN API.)
--ssl-key <key_file> (Private SSL key for the BARMAN API.)
--ssl-ca-cert <ca_file> (CA certificate to verify peer against the BARMAN API.)
--team <database-role> (Specify the name of the database group role, on the PEM.
↳ backend database server, that should have access to this BARMAN API Server.)
--owner <database-user> (Specify the name of the database user, on the PEM backend.
↳ database server, who will own the BARMAN API Server.)
--config-file/-c <config_file> (Path to the agent configuration file.)

```

Note: After registering the Barman server you need to restart the PEM agent.

VIEWING THE BARMAN SERVER DETAILS ON A PEM DASHBOARD

Once the Barman server is configured, you can see the entire backup- and server-related details for that particular Barman server on the PEM Dashboard.

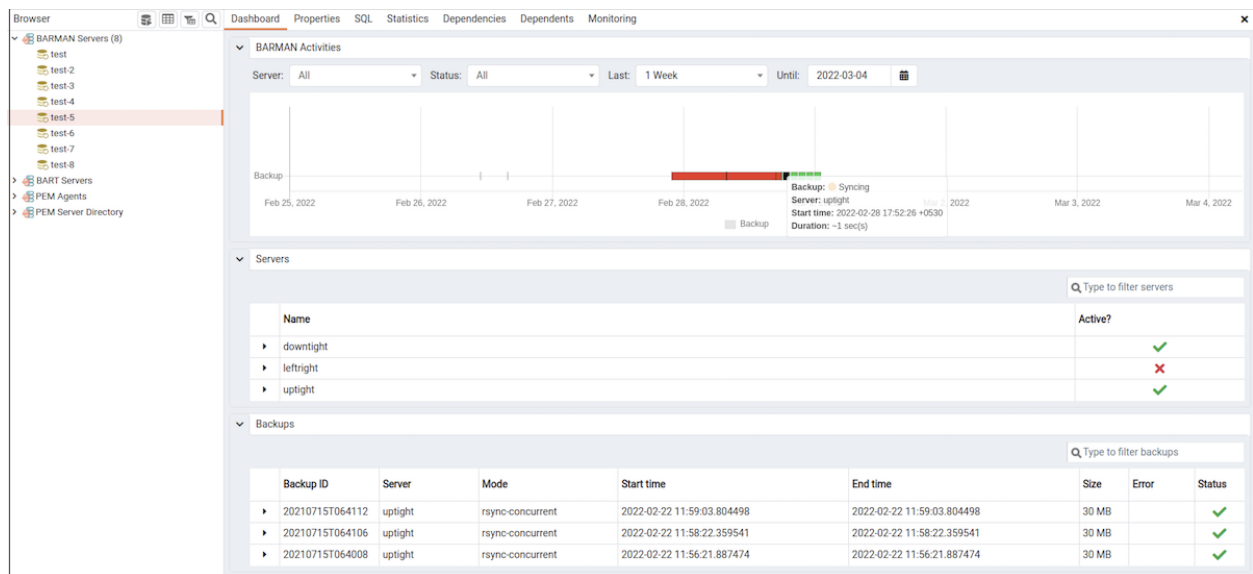


Fig. 1: BARMAN dashboard

When you select a monitored Barman server, details of all the associated database servers along with their activities are displayed as a chart on the Dashboard in the **Barman Activities** panel. You can select the activities on any criteria that you specify in the filter boxes (the database server, status, duration, or date).

The **Servers** panel displays a list of all the database servers managed by that particular Barman server along with the active status.

The **Backups** panel displays a list of all the backups of the database servers managed by that particular Barman server. You can filter the list to display the details of a particular database server. You can also filter the list on any criteria that you specify in the filter box. Typically, this filter works with any kind of string value (excluding date, time, and size) listed under the columns. For example, you can type `tar` to filter the list and display only those backups that are in `tar` format.

Backup details includes the Backup ID , Server , Mode , Start time , End time , Size , Error , and Status column.

Servers		Q Type to filter servers
Name		Active?
downtight		✓
Configuration		
Parameter	Value	
active	true	
archiver	false	
archiver_batch_size	0	
backup_directory	/var/lib/barman/uptight	
backup_method	rsync	
backup_options	concurrent_backup	
bandwidth_limit		
barman_home	/var/lib/barman	
barman_lock_directory	/var/lib/barman	
basebackup_retry_sleep	30	
basebackup_retry_times	3	
basebackups_directory	/var/lib/barman/uptight/base	
check_timeout	30	
compression	pglz	
conninfo	host=uptight port=5432 dbname=postgres user=barman	
create_slot	manual	
custom_compression_filter		
custom_decompression_filter		
description	Backups from uptight	
disabled	false	
errors_directory	/var/lib/barman/uptight/errors	
immediate_checkpoint	false	
incoming_wals_directory	/var/lib/barman/uptight/incoming	
last_backup_maximum_age	7 days	
max_incoming_wals_queue		
minimum_redundancy	3	
msg_list	[]	
name	uptight	
network_compression	false	
parallel_jobs	1	
path_prefix	/usr/lib/postgresql/11/bin	
post_archive_retry_script		
post_archive_script		
post_backup_retry_script		
post_backup_script		
post_delete_retry_script		
post_delete_script		
post_recovery_retry_script		
post_recovery_script		
post_wal_delete_retry_script		
post_wal_delete_script		
pre_archive_retry_script		
pre_archive_script		
pre_backup_retry_script		
pre_backup_script		
pre_delete_retry_script		
pre_delete_script		
pre_recovery_retry_script		
pre_recovery_script		
pre_wal_delete_retry_script		
pre_wal_delete_script		
primary_ssh_command		
recovery_options	get-wal	
retention_policy	window 4 w	
retention_policy_mode	auto	
reuse_backup	link	
slot_name	backup_unarmed	
ssh_command	ssh -q postgres@uptight	
streaming_archiver	true	
streaming_archiver_batch_size	0	
streaming_archiver_name	barman_receive_wal	
streaming_backup_name	barman_streaming_backup	
streaming_conninfo	host=uptight port=5432 dbname=postgres user=streaming_barman	
streaming_wals_directory	/var/lib/barman/uptight/streaming	
tablespace_bandwidth_limit		
wal_retention_policy	simple-wal 4 w	
wals_directory	/var/lib/barman/uptight/wals	
leftright		✗
uptight		✓

Fig. 2: BARMAN dashboard - Servers panel

Backups

Q Type to filter backups

Backup ID	Server	Mode	Start time	End time	Size	Error	Status
20210715T064112	uptight	rsync-concurrent	2022-02-22 11:59:03.804498	2022-02-22 11:59:03.804498	30 MB		✓

Backup details

Parameter	Value
backup_id	20210715T064112
backup_label	START WAL LOCATION: 0/D000028 (file 00000001000000000000000D)\nCHECKPOINT LOCATION: 0/D000060\nBACKUP METHOD: streamed\nBACKUP FROM: master\...
begin_offset	40
begin_time	Thu Jul 15 06:41:12 2021
begin_wal	00000001000000000000000D
begin_xlog	0/D000028
config_file	/opt/postgres/data/postgresql.conf
copy_stats	{ 'analysis_time': 0.497281, 'analysis_time_per_item': { 'pgdata': 0.497281 }, 'copy_time': 0.482371, 'copy_time_per_item': { 'pg_control': 0.148338, 'pgdata': 0.332809 }, '...
deduplicated_size	41992
end_offset	248
end_time	Thu Jul 15 06:41:13 2021
end_wal	00000001000000000000000D
end_xlog	0/D0000F8
error	
hba_file	/opt/postgres/data/pg_hba.conf
ident_file	/opt/postgres/data/pg_ident.conf
included_files	/opt/postgres/data/conf.d/0000-tpa.conf, /opt/postgres/data/conf.d/0001-tpa_restart.conf, /opt/postgres/data/conf.d/11111-extensions.conf, /opt/postgres/data/conf...
mode	rsync-concurrent
pgdata	/opt/postgres/data
server_name	uptight
size	31975345
status	DONE
systemid	6985025709346482144
tablespaces	
timeline	1
version	110012
xlog_segment_size	16777216

20210715T064106	uptight	rsync-concurrent	2022-02-22 11:58:22.359541	2022-02-22 11:58:22.359541	30 MB		✓
20210715T064008	uptight	rsync-concurrent	2022-02-22 11:56:21.887474	2022-02-22 11:56:21.887474	30 MB		✓

Fig. 3: BARMAN dashboard - Backups panel

MONITORING FAILOVER MANAGER

If you are using EDB Failover Manager to monitor your replication scenario, you must manually install and configure Failover Manager. For detailed information about installing Failover Manager, visit the EDB website at:

<https://www.enterprisedb.com/products/edb-postgres-platform/edb-postgres-failover-manager>

To monitor the status of a Failover Manager cluster on the Streaming Replication dashboard, you must provide the following information on the **Advanced** tab of the **server Properties** dialog for each node of the cluster:

- Use the **EFM Cluster Name** field to specify the name of the Failover Manager cluster. The cluster name is the prefix of the name of the cluster properties file. For example, if your cluster properties file is named `efm.properties`, your cluster name is `efm`.
- Use the **EFM Installation Path** field to specify the location of the Failover Manager binary file. By default, the Failover Manager binary file is installed in `/usr/efm-<X>/bin`.

Where `<X>` is the EFM Version.

After registering your servers, the **Streaming Replication Analysis** dashboard will display status information about your EFM cluster near the bottom of the dashboard.

Failover Manager Cluster Status

Failover Manager Cluster Information

Properties	Values
Cluster Name	efm
Failover Manager Agent Running Status	UP
Allowed Node List	172.16.177.194, 172.16.23.156
Standby Priority List	172.16.23.156
Missing Nodes	
Minimum Standbys	0
Membership Coordinator	172.16.177.194
Cluster Status Message	

Failover Manager Node Status

Agent Type	Address	Agent	DB	XLog Location	XLog Receive	Status Information	XLog Information	VIP	VIP Status
Primary	172.16.177.194	UP	UP	0/8000140					False
Standby	172.16.23.156	UP	UP	0/8000140	0/8000140				False

Fig. 1: The Failover Manager cluster status report

The **Failover Manager Cluster Status** section of the **Streaming Replication Analysis** dashboard displays information about the monitored cluster:

The **Failover Manager Cluster Information** table provides information about the Failover Manager cluster:

- The **Properties** column displays the name of the cluster property.
- The **Values** column displays the current value of the property.

The **Failover Manager Node Status** table displays information about each node of the Failover Manager cluster:

- The **Agent Type** column displays the type of agent that resides on the node; the possible values are Primary, Replica, Witness, Idle, and Promoting.
- The **Address** column displays the IP address of the node.
- The **Agent** column displays the status of the agent that resides on the node.
- The **DB** column displays the status of the database that resides on the node.
- The **XLog Location** column displays the transaction log location of the database.
- The **Status Information** column displays any error-related information about the node.
- The **XLog Information** column displays any error-related information about the transaction log.
- The **VIP** column displays the VIP address that is associated with the node.
- The **VIP Status** column displays True if the VIP is active for the node, False if the VIP is not.

16.1 Replacing a primary node

You can use the PEM client to replace the Primary node of a Failover Manager cluster with a replica node. To initiate the failover process, select **Replace Cluster Primary** from **Server** under the **Tools** menu. A dialog opens, asking you to confirm that you wish to replace the current primary node.

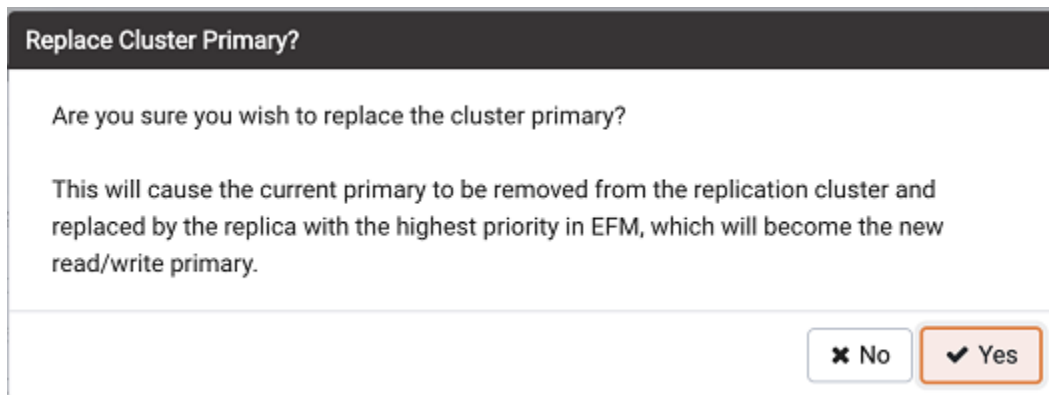


Fig. 2: Replacing the Primary node of a cluster

Select **Yes** to remove the current primary node from the Failover Manager cluster and promote a replica node to the role of read/write primary node within a Failover Manager cluster. The node with the highest promotion priority (defined in Failover Manager) will become the new primary node. PEM will display a dialog, reporting the job status.

When the job completes and the **Streaming Replication Analysis** dashboard refreshes, you can review the **Failover Manager Node Status** table to confirm that a replica node has been promoted to the role of primary within the Failover Manager cluster.

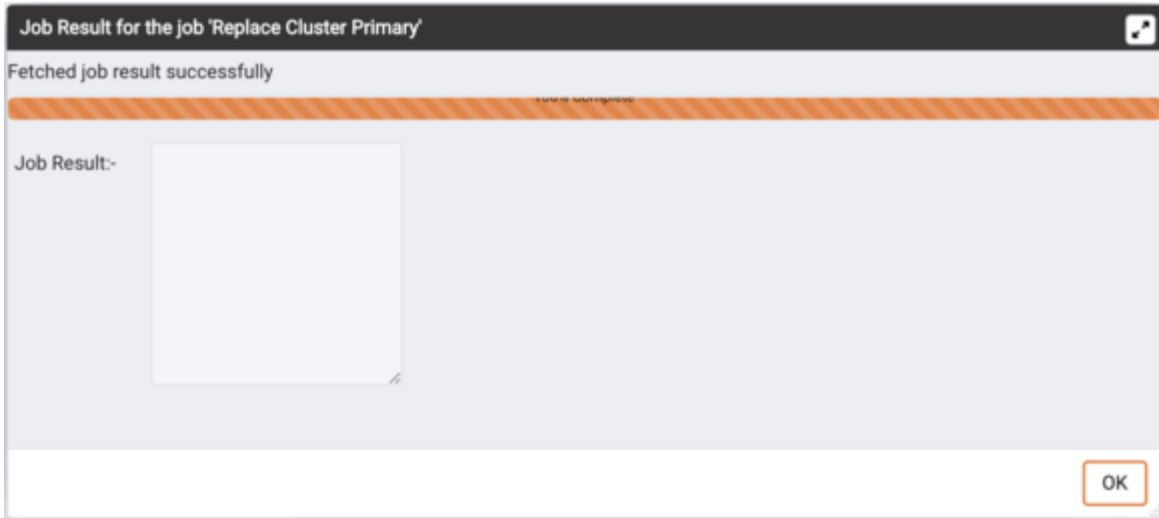


Fig. 3: Confirmation of the promotion

16.2 Switchover EFM cluster

You can use the PEM client to replace the primary node of a Failover Manager cluster with a replica node. To initiate the switchover process, select **Switchover EFM Cluster** from the Tools menu. A dialog opens, asking you to confirm that you wish to switchover EFM cluster.

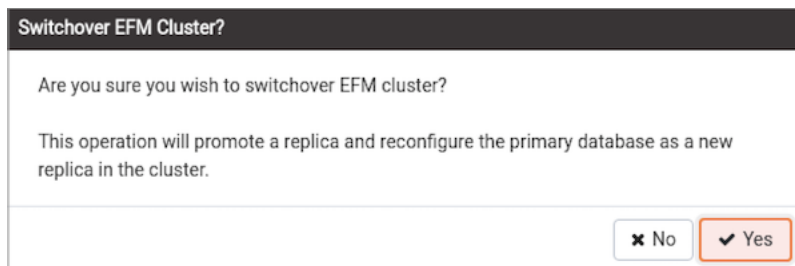


Fig. 4: Switchover EFM Cluster

Select **Yes** to start the Failover Manager switchover, and promote a replica node to the role of read/write primary node and reconfigure the primary database as a new replica within a Failover Manager cluster. The node with the highest promotion priority (defined in Failover Manager) will become the new primary node. PEM will display a dialog, reporting the job status.

When the job completes and the **Streaming Replication Analysis** dashboard refreshes, you can review the **Failover Manager Node Status** table to confirm that a switchover occurred.

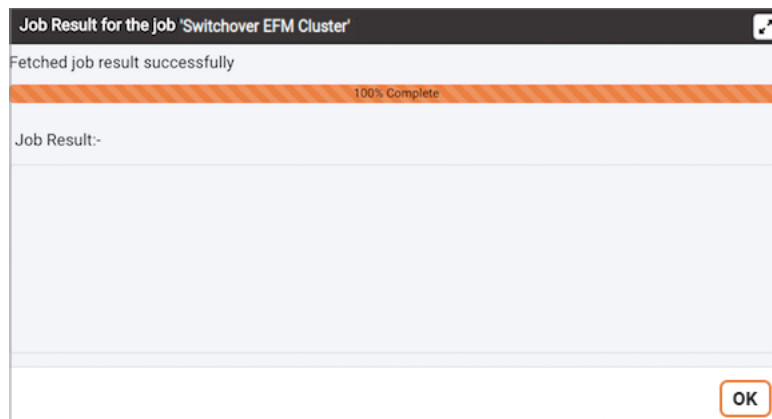


Fig. 5: Confirmation of the promotion

MONITORING AN XDB REPLICATION CLUSTER

Before configuring PEM to retrieve statistics from an Advanced Server or PostgreSQL database that is part of an xDB replication scenario, you must manually install and configure xDB Replication. For more information about xDB replication solutions and documentation, please visit the EDB website at:

<http://www.enterprisedb.com/products-services-training/products-overview/xdm-replication-server-multi-master>

The PEM xDB Replication probe monitors lag data for clusters that use xDB multi-primary or single-primary replication that have a publication database that is an EDB Postgres Advanced Server or PostgreSQL database. Please note that if you have configured replication between other proprietary database hosts (i.e. Oracle or SQL Server) and Advanced Server or PostgreSQL, the probe cannot return lag information.

By default, the xDB Replication probe is disabled. To enable the xDB Replication probe, right click on the name of the server, and select **Connect** from the context menu; if prompted, provide authentication information. After connecting, expand the server node of the tree control, and highlight the name of the replicated database. Then, select **Manage Probes...** from the **Management** menu.

Use fields on the **Manage Probes** tab to configure the xDB Replication probe:

- Move the **Default** slider to **No** to modify the Minutes and Seconds between probe executions.
- Use the **Enabled?** slider to instruct PEM to execute the xDB Replication probe.
- Set the **Default** slider in the **Data Retention** field to **No** to modify the number of days that PEM will store the information retrieved by the probe.

After enabling the probe, you can use the metrics returned to create custom charts and dashboards in the PEM client.

Properties
SQL
Statistics
Dependencies
Dependents
Monitoring
Manage Probes

Description

Manage Custom Probes: PEM uses probes to retrieve statistics from a monitored server, database, operating system or agent. You can view, reconfigure, delete, or create your own custom probes.

Copy Probes: PEM allows copying of probes from any chosen object recursively down through the object hierarchy. Click on Copy Probes to quickly copy the displayed probe configuration to a selected target.

Quick Links

Manage Custom Probes

Copy Probes

Help

Probes

Probe name	Execution Frequency			Enabled?		Data Retention	
	Default?	Minutes	Seconds	Default?	Probe Enable?	Default?	Days
Background Writer Statistics	☒	5	0	☒	☒	☒	180
Blocked Session Information	☒	5	0	☒	☒	☒	180
Data and Log File Analysis	☒	0	10	☒	☒	☒	180
Database Frozen XID	☒	720	0	☒	☒	☒	180
Database Size	☒	30	0	☒	☒	☒	180
Database Statistics	☒	30	0	☒	☒	☒	90
Failover Manager Cluster Info	☒	5	0	☒	☐	☒	7
Failover Manager Node Status	☒	5	0	☒	☐	☒	7
Lock Information	☒	5	0	☒	☒	☒	180
Number of Prepared Transactions	☒	5	0	☒	☒	☒	180
Number of WAL Files	☒	5	0	☒	☒	☒	180
Object Catalog: Database	☒	5	0	☒	☒	☒	180
Object Catalog: Tablespace	☒	5	0	☒	☒	☒	180
PG HBA Conf	☒	30	0	☒	☒	☒	180
Server Information	☒	5	0	☒	☒	☒	180
Server log Configuration	☒	0	10	☒	☒	☒	180
Session Information	☒	5	0	☒	☒	☒	180
Settings	☒	5	0	☒	☒	☒	180
Streaming Replication	☒	5	0	☒	☐	☒	180
Streaming Replication Database Conflicts	☒	5	0	☒	☐	☒	180
Streaming Replication Lag Time	☒	5	0	☒	☐	☒	180
Tablespace Size	☒	30	0	☒	☒	☒	180
User Information	☒	30	0	☒	☒	☒	180
WAL Archive Status	☒	30	0	☒	☐	☒	180

Fig. 1: The Manage Probes tab

REPORTS

You can generate the System Configuration report and Core Usage report for all locally and remotely managed servers. To generate this report, select **Reports** from the **Management Menu**.

Reports has following options:

- System Configuration Report (JSON)
- System Configuration Report (HTML)
- Core Usage Report (JSON)
- Core Usage Report (HTML)

Please note that only superusers or the users with the pem_admin role permission can download the System Configuration or Core Usage reports.

Also note that information in these reports will reflect the latest probe run time.

18.1 System Configuration Report

The System Configuration Report provides detailed information about the PEM Agents group, PEM Server directory group and custom groups listed under browser tree. These groups can contain Postgres Enterprise Manager, PEM Agents and Database servers. You can download this report in HTML as well as in JSON format.

The **Postgres Enterprise Manager Summary** provides details about:

- The Postgres Enterprise Manager backend database server version
- Application version
- User name accessing the application
- Python version
- Flask version
- Platform specific information

The **Summary** provides information about the number of agents and servers.

The **Group: PEM Agents** panel provides details about the PEM agent, CPU cores, Disk Utilization, and Memory information.

The **Group: PEM Server Directory**, provides details about:

- Database server version
- Host

System Configuration Report	
Generated On: 2020-04-28 14:30:49	Go to: PEM Agents
Postgres Enterprise Manager Summary	
Parameter	Value
Name	Postgres Enterprise Manager
Backend version	PostgreSQL 12.1 on x86_64-pc-linux-gnu, compiled by gcc (GCC) 4.8.5 20150623 (Red Hat 4.8.5-39), 64-bit
App version	7.14.0-dev (schema: 202003031)
User	postgres
Python version	3.7.5
Flask version	1.0.4
Platform	System : Darwin Node : Laptop358.pn.in Release : 18.7.0 Version : Darwin Kernel Version 18.7.0: Thu Jan 23 06:52:12 PST 2020; root:xnu-4903.278.2/RELEASE_ARM_T8020 Machine : x86_64 Processor : i386
Summary	
Parameter	Value
Agents	Windows : 0 Linux : 2
Servers	PG : 2 EPAS : 2 Unknown : 0 Locally Managed : 3 Remotely Managed : 1 Unmanaged : 0
Group: PEM Agents	
Group: PEM Server Directory	

Fig. 1: System Configuration Report - PEM Summary and Summary

- Port
- Database name
- Database size
- Tablespace size

Please note that here Group Server Name depends on the group name to which the server is added.

18.2 Core Usage report

The Core Usage report provides detailed information about number of cores specific to:

- The server type
- Database version
- Platform and group name

The report also gives detailed information about locally managed servers:

- Type
- Host
- Port
- Platform
- Cores
- RAM

System Configuration Report

Generated On: 2020-04-28 14:30:49

Go to: PEM Agents

Postgres Enterprise Manager Summary

Summary

Group: PEM Agents

Agent: Postgres Enterprise Manager Host

Agent Details

Parameter	Value
Platform	Linux-x64
OS	CentOS Linux release 7.5.1804 (Core)
Version	7.14.0-dev
Active	True
Hostname	localhost.localdomain
Domain Name	(none)
Bound Local Servers	Postgres Enterprise Manager Server EDB Postgres Advanced Server 11 EPAS_12
Bound Remote Servers	(none)

CPU

Total CPU Cores: 2

Average CPU Utilization (%): 25.31

Core ID	Load Percentage
CPU0	25.267327
CPU1	25.353135

Disk Utilization

Total Disk Size (MB): 32098

Disk Space Used (MB): 13791

Disk Space Available (MB): 16669

Disk Utilization (%): 42.97

Mount Point	File System	Size (MB)	Space Used (MB)	Space Available (MB)
/	/dev/sda3	31622	13657	16352
/boot	/dev/sda1	476	134	317

Memory Details

Parameter	Value
Free RAM (MB)	1050
Memory Usage Percentage	72.17
Total Swap Memory (MB)	7999
Free Swam Memory (MB)	6589
Swap Usage Percentage	17.63

Agent: localhost.localdomain

Agent Details

CPU

Disk Utilization

Memory Details

Group: PEM Server Directory

Fig. 2: System Configuration Report - PEM Agents

System Configuration Report

Generated On: 2020-04-28 14:30:49

Go to: PEM Agents

> Postgres Enterprise Manager Summary

> Summary

> Group: PEM Agents

> Group: PEM Server Directory

Server: Postgres Enterprise Manager Server

> Server Details

Parameter	Value
Agent	Postgres Enterprise Manager Host
Host	192.168.1.19
Port	5432
Database	postgres
Version	PostgreSQL 12.1 on x86_64-pc-linux-gnu, compiled by gcc (GCC) 4.8.5 20150623 (Red Hat 4.8.5-39), 64-bit
Service Id	postgresql-12
Remote Monitored?	False
Active	True

> Database Details

Name	Size (MB)	Tablespace Name
postgres	8	pg_default
edbstore_temp	8	pg_default
hr	8	pg_default
pem	2407	pg_default
testdb	27	pg_default
db01	8	pg_default

> Tablespace Details

Name	Size (MB)
pg_global	0
pg_default	2482

Server: EPAS_12

> Server Details

> Database Details

> Tablespace Details

Server: EDB Postgres Advanced Server 11

> Server Details

> Database Details

> Tablespace Details

Server: PGSQL12_Centos7_1

> Server Details

> Database Details

> Tablespace Details

Fig. 3: System Configuration Report - Group Server Name

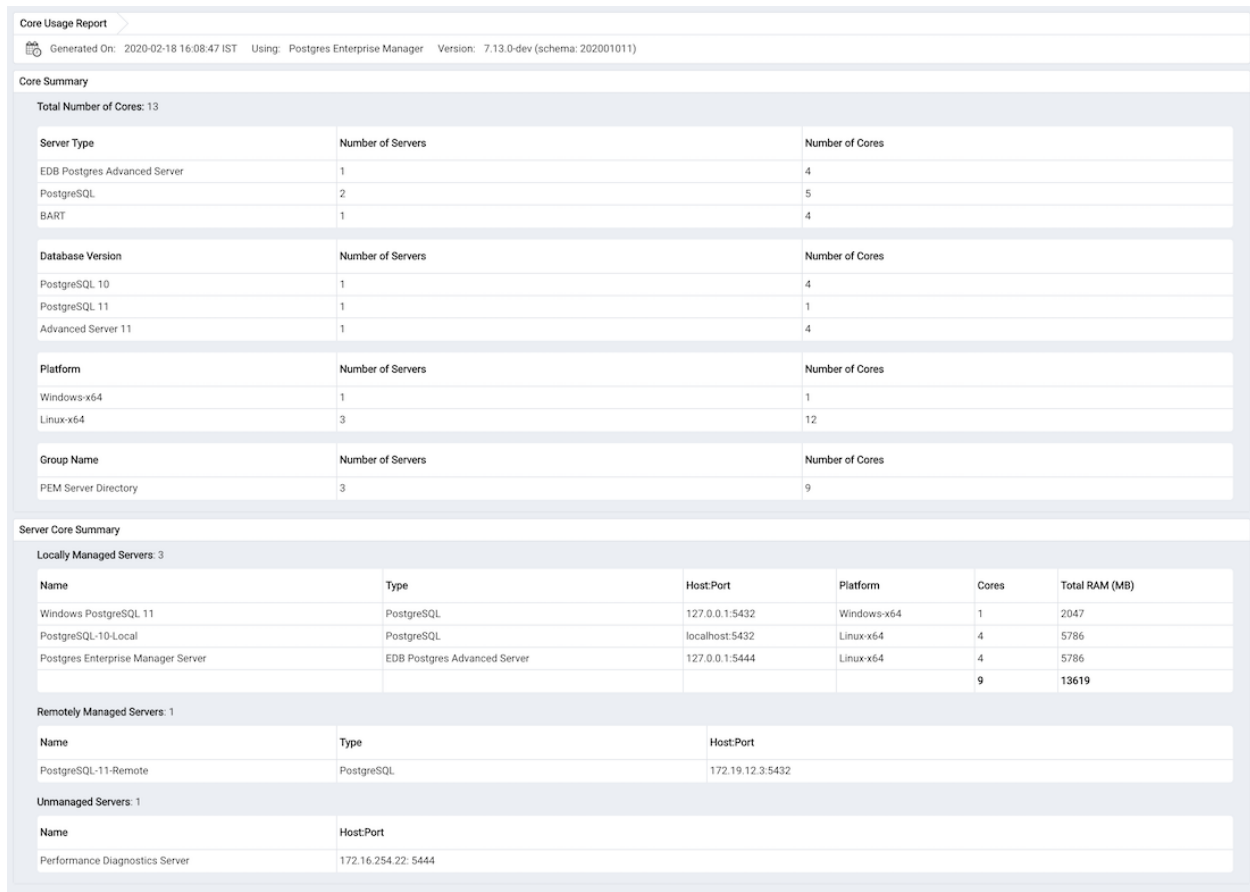


Fig. 4: Core Usage Report

REFERENCE

The following sections are provided for reference; please note that the items referred to in the following tables are subject to change.

19.1 PEM server configuration parameters - reference

You can use global configuration options to modify aspects of the PEM Server's behavior. Please note that the list of configuration parameters is subject to change.

Parameter name	Value and Unit	Description
audit_log_retention_time	30 days	Specifies the number of days that an audit log will be retained on the PEM server.
auto_create_agent_alerts	true	Specifies whether to create default agent level alerts automatically when an agent is registered.
auto_create_server_alerts	true	Specifies whether to create default server level alerts automatically when a server is bound to an agent.
chart_disable_bullets	false	Enable/disable bullets on line charts on dashboards and Capacity Manager reports.
cm_data_points_per_report	50	Specifies the number of data points to plot on charts on Capacity Manager reports.
cm_max_end_date_in_years	5 years	Specifies the maximum amount of time that the Capacity Manager will extrapolate data for. Ensures that threshold-based end dates of on reports do not get extrapolated indefinitely.
dash_alerts_timeout	60 seconds	Specifies the number of seconds after which the components of the Alerts dashboard are auto-refreshed.
dash_db_comrol_span	7 days	Specifies the number of days worth of data to plot on the Commit/Rollback Analysis chart on the Database Analysis dashboard and Server Analysis dashboard.
dash_db_comrol_timeout	1800 seconds	Specifies the number of seconds after which the Commits/Rollbacks line chart is auto-refreshed on the Database Analysis dashboard and Server Analysis dashboard.
dash_db_connovervw_timeout	300 seconds	Specifies the number of seconds after which the Connection Overview pie chart is auto-refreshed in the Database Analysis dashboard.
dash_db_eventlag_span	7 days	Specifies the number of days worth of data to plot on the Number of Events Lag chart for slony replication on the Database Analysis dashboard.

continues on next page

Table 1 – continued from previous page

Parameter name	Value and Unit	Description
dash_db_eventlag_timeout	1800 seconds	Specifies the number of seconds after which the Number of Events Lag line chart for slony replication is auto-refreshed on the Database Analysis dashboard.
dash_db_hottable_rows	25 rows	Specifies the number of rows to show on the HOT Table Analysis table on the Database Analysis dashboard.
dash_db_hottable_timeout	300 seconds	Specifies the number of seconds after which the Hot Tables table is auto-refreshed in the Database Analysis dashboard.
dash_db_io_span	7 days	Specifies the number of days worth of data to plot on the Database I/O Analysis chart on the Database Analysis dashboard and I/O Analysis dashboard.
dash_db_io_timeout	1800 seconds	Specifies the number of seconds after which the Database I/O line chart is auto-refreshed on the Database Analysis dashboard and I/O Analysis dashboard.
dash_db_rowact_span	7 days	Specifies the number of days worth of data to plot on the Row Activity Analysis chart on the Database Analysis dashboard, the I/O Analysis dashboard, and the Server Analysis dashboard.
dash_db_rowact_timeout	1800 seconds	Specifies the number of seconds after which the Row Activity line chart is auto-refreshed on the Database Analysis dashboard, the I/O Analysis dashboard, and the Server Analysis dashboard.
dash_db_storage_timeout	300 seconds	Specifies the number of seconds after which the Storage bar chart is auto-refreshed in the Database Analysis dashboard.
dash_db_timelag_span	7 days	Specifies the number of days worth of data to plot on the Time Lag chart for Slony replication on the Database Analysis dashboard.
dash_db_timelag_timeout	1800 seconds	Specifies the number of seconds after which the Time Lag line chart for Slony replication is auto-refreshed on the Database Analysis dashboard.
dash_db_useract_span	7 days	Specifies the number of days worth of data to plot on the User Activity Analysis chart on the Database Analysis dashboard.
dash_db_useract_timeout	1800 seconds	Specifies the number of seconds after which the User Activity line chart is auto-refreshed in the Database Analysis dashboard.
dash_efm_timeout	300 seconds	Specifies the number of seconds after which the Failover Manager Node Status and Failover Manager Cluster Info line chart is auto-refreshed on the Streaming Replication dashboard.
dash_global_overview_timeout	30 seconds	Specifies the number of seconds after which the components of the Global Overview dashboard are auto-refreshed.
dash_header_timeout	60 seconds	Specifies the number of seconds after which the information on the header of all the dashboards are auto-refreshed.
dash_io_chkpt_span	7 days	Specifies the number of days worth of data to plot on the Checkpoints chart on the I/O Analysis dashboard.

continues on next page

Table 1 – continued from previous page

Parameter name	Value and Unit	Description
dash_io_chkpt_timeout	1800 seconds	Specifies the number of seconds after which the Check-points line chart is auto-refreshed on the I/O Analysis dashboard.
dash_io_hotindx_timeout	300 seconds	Specifies the number of seconds after which the Hot Indexes bar chart is auto-refreshed on the I/O Analysis dashboard.
dash_io_hottbl_timeout	300 seconds	Specifies the number of seconds after which the Hot Tables bar chart is auto-refreshed on the I/O Analysis dashboard.
dash_io_index_objectio_rows	25 rows	Specifies the number of rows displayed on the Index Activity table on the I/O Analysis dashboard and the Object Activity Analysis dashboard.
dash_io_index_objectio_timeout	60 seconds	Specifies the number of seconds after which the Index Activity table is auto-refreshed on the I/O Analysis dashboard and the Object Activity Analysis dashboard.
dash_io_objectio_rows	25 rows	Specifies the number of rows displayed in the Object I/O Details table on the I/O Analysis dashboard and Object Activity Analysis dashboard.
dash_io_objectio_timeout	300 seconds	Specifies the number of seconds after which the Object I/O Details table is auto-refreshed on the I/O Analysis dashboard and Object Activity Analysis dashboard.
dash_memory_hostmemact_span	7 days	Specifies the number of days worth of data to plot on the Host Memory Activity Analysis chart on the Memory Analysis dashboard.
dash_memory_hostmemact_timeout	1800 seconds	Specifies the number of seconds after which the Host Memory Activity line chart is auto-refreshed on the Memory Analysis dashboard.
dash_memory_hostmemconf_timeout	300 seconds	Specifies the number of seconds after which the Host Memory Configuration pie chart is auto-refreshed on the Memory Analysis dashboard and Server Analysis dashboard.
dash_memory_servmemact_span	7 days	Specifies the number of days worth of data to plot on the server Memory Activity Analysis chart on the Memory Analysis dashboard.
dash_memory_servmemact_timeout	1800 seconds	Specifies the number of seconds after which the Server Memory Activity line chart is auto-refreshed on the Memory Analysis dashboard.
dash_memory_servmemconf_timeout	300 seconds	Specifies the number of seconds after which the Server Memory Configuration pie chart is auto-refreshed on the Memory Analysis dashboard.
dash_objectact_objstorage_rows	15 rows	Specifies the number of rows to show on the Object Storage table on the Object Activity Analysis dashboard.
dash_objectact_objstorage_timeout	300 seconds	Specifies the number of seconds after which the Object Storage table is auto-refreshed in the Object Activity Analysis dashboard.
dash_objectact_objtopindexes_timeout	300 seconds	Specifies the number of seconds after which the Top 5 Largest Indexes bar chart is auto-refreshed in the Object Activity Analysis dashboard.

continues on next page

Table 1 – continued from previous page

Parameter name	Value and Unit	Description
dash_objectact_objtoptables_timeout	300 seconds	Specifies the number of seconds after which the Top 5 Largest Tables bar chart is auto-refreshed in the Object Activity Analysis dashboard.
dash_os_cpu_span	7 days	Specifies the number of days worth of data to plot on the CPU chart on the Operating System Analysis dashboard.
dash_os_cpu_timeout	1800 seconds	Specifies the number of seconds after which the CPU line chart is auto-refreshed on the Operating System Analysis dashboard.
dash_os_data_span	7 days	Specifies the number of days worth of data to plot on the I/O line chart on the Operating System Analysis dashboard.
dash_os_disk_span	7 days	Specifies the number of days worth of data to plot on the Utilisation chart on the Operating System Analysis dashboard.
dash_os_hostfs_timeout	1800 seconds	Specifies the number of seconds after which the Host File System Details table is auto-refreshed on the Operating System Analysis dashboard.
dash_os_io_timeout	1800 seconds	Specifies the number of seconds after which the I/O line chart is auto-refreshed on the Operating System Analysis dashboard.
dash_os_memory_span	7 days	Specifies the number of days worth of data to plot on the Memory chart on the Operating System Analysis dashboard.
dash_os_memory_timeout	1800 seconds	Specifies the number of seconds after which the Memory line chart is auto-refreshed on the Operating System Analysis dashboard.
dash_os_packet_span	7 days	Specifies the number of days worth of data to plot on the Packet chart on the Operating System Analysis dashboard.
dash_os_packet_timeout	1800 seconds	Specifies the number of seconds after which the Network Packets line chart is auto-refreshed on the Operating System Analysis dashboard.
dash_os_process_span	7 days	Specifies the number of days worth of data to plot on the Process chart on the Operating System Analysis dashboard.
dash_os_process_timeout	1800 seconds	Specifies the number of seconds after which the Process line chart is auto-refreshed on the Operating System Analysis dashboard.
dash_os_storage_timeout	1800 seconds	Specifies the number of seconds after which the Storage pie chart is auto-refreshed on the Operating System Analysis dashboard.
dash_os_traffic_span	7 days	Specifies the number of days worth of data to plot on the Traffic chart on the Operating System Analysis dashboard.
dash_os_traffic_timeout	1800 seconds	Specifies the number of seconds after which the Traffic line chart is auto-refreshed on the Operating System Analysis dashboard.
dash_os_util_timeout	1800 seconds	Specifies the number of seconds after which the Utilisation line chart is auto-refreshed on the Operating System Analysis dashboard.

continues on next page

Table 1 – continued from previous page

Parameter name	Value and Unit	Description
dash_probe_log_timeout	300 seconds	Specifies the number of seconds after which the Probe Log table is auto-refreshed on
dash_replication_archivestat_span	7 days	Specifies the number of days worth of data to plot on the WAL Archive Status chart on the Streaming Replication Analysis dashboard.
dash_replication_archivestat_timeout	1800 seconds	Specifies the number of seconds after which the WAL Archive Status line chart is auto-refreshed on the Streaming Replication dashboard.
dash_replication_pagelag_span	7 days	Specifies the number of days worth of data to plot on the WAL Lag Pages chart on the Streaming Replication dashboard.
dash_replication_pagelag_timeout	1800 seconds	Specifies the number of seconds after which the WAL Lag Pages line chart is auto-refreshed on the Streaming Replication dashboard.
dash_replication_segmentlag_span	7 days	Specifies the number of days worth of data to plot on the WAL Lag Segments chart on the Streaming Replication dashboard.
dash_replication_segmentlag_timeout	1800 seconds	Specifies the number of seconds after which the WAL Lag Segments line chart is auto-refreshed on the Streaming Replication dashboard.
dash_replication_timelag_span	7 days	Specifies the number of days worth of data to plot on the Replication Lag Time chart on the Streaming Replication dashboard.
dash_replication_timelag_timeout	1800 seconds	Specifies the number of seconds after which the Replication Lag Time line chart is auto-refreshed on the Streaming Replication dashboard.
dash_server_buffers_written	168 hours	Specifies the number of days worth of data to plot on the Background Writer Statistics chart on the Server Analysis dashboard.
dash_server_buffers_written_timeout	300 seconds	Specifies the number of seconds after which the Background Writer Statistics line chart is auto-refreshed on the Server Analysis dashboard.
dash_server_connovervw_timeout	300 seconds	Specifies the number of seconds after which the Connection Overview pie chart is auto-refreshed in the Server Analysis dashboard.
dash_server_database_timeout	300 seconds	Specifies the number of seconds after which the Databases table is auto-refreshed in the Server Analysis dashboard.
dash_server_dbsize_span	7 days	Specifies the number of days worth of data to plot on the Database Size Analysis on the Server Analysis dashboard.
dash_server_dbsize_timeout	1800 seconds	Specifies the number of seconds after which the Database Size line chart is auto-refreshed in the Server Analysis dashboard.
dash_server_disk_timeout	1800 seconds	Specifies the number of seconds after which the Disk line chart is auto-refreshed in the Server Analysis dashboard.
dash_server_global_span	7 days	Specifies the number of days worth of data to plot on the Disk line chart on the Server Analysis dashboard.

continues on next page

Table 1 – continued from previous page

Parameter name	Value and Unit	Description
dash_server_sharedbuff_span	7 days	Specifies the number of days worth of data to plot on the Shared Buffer chart on the Server Analysis dashboard.
dash_server_sharedbuff_timeout	1800 seconds	Specifies the number of seconds after which the Shared Buffers line chart is auto-refreshed in the Server Analysis dashboard.
dash_server_tabspacesize_span	7 days	Specifies the number of days worth of data to plot on the Tablespace Size chart on the Server Analysis dashboard.
dash_server_tabspacesize_timeout	1800 seconds	Specifies the number of seconds after which the Tablespace Size line chart is auto-refreshed in the Server Analysis dashboard.
dash_server_useract_span	7 days	Specifies the number of days worth of data to plot on the User Activity chart on the Server Analysis dashboard.
dash_server_useract_timeout	1800 seconds	Specifies the number of seconds after which the User Activity line chart is auto-refreshed in the Server Analysis dashboard.
dash_sessact_lockact_timeout	300 seconds	Specifies the number of seconds after which the Session Lock Activity table is auto-refreshed in the Session Activity Analysis dashboard.
dash_sessact_workload_timeout	300 seconds	Specifies the number of seconds after which the Session Workload table is auto-refreshed in the Session Activity Analysis dashboard.
dash_sess_waits_nowaits_timeout	300 seconds	Specifies the number of seconds after which the Session Waits By Number Of Waits pie
dash_sess_waits_timewait_timeout	300 seconds	Specifies the number of seconds after which the Session Waits By Time Waited pie chart is auto-refreshed in the Session Waits Analysis dashboard.
dash_sess_waits_waitdtl_timeout	300 seconds	Specifies the number of seconds after which the Session Waits Details table is auto-refreshed in the Session Waits Analysis dashboard.
dash_storage_dbdtls_timeout	300 seconds	Specifies the number of seconds after which the Database Details table is auto-refreshed in the Storage Analysis dashboard.
dash_storage_dbovervw_timeout	300 seconds	Specifies the number of seconds after which the Database Overview pie chart is auto-refreshed in the Storage Analysis dashboard.
dash_storage_hostdtls_timeout	300 seconds	Specifies the number of seconds after which the Host Details table is auto-refreshed
dash_storage_hostovervw_timeout	300 seconds	Specifies the number of seconds after which the Host Overview pie chart is auto-refreshed in the Storage Analysis dashboard.
dash_storage_tblspcdtls_timeout	300 seconds	Specifies the number of seconds after which the Tablespace Details table is auto-refreshed in the Storage Analysis dashboard.
dash_storage_tblspcovervw_timeout	300 seconds	Specifies the number of seconds after which the Tablespace Overview pie chart is auto-refreshed in the Storage Analysis dashboard.
dash_sys_waits_nowaits_timeout	300 seconds	Specifies the number of seconds after which the System Waits By Number Of Waits pie chart is auto-refreshed in the System Waits Analysis dashboard.

continues on next page

Table 1 – continued from previous page

Parameter name	Value and Unit	Description
dash_sys_waits_timewait_timeout	300 seconds	Specifies the number of seconds after which the System Waits By Time Waited pie chart is auto-refreshed in the System Waits Analysis dashboard.
dash_sys_waits_waitdtl_timeout	300 seconds	Specifies the number of seconds after which the System Waits Details table is auto-refreshed in the System Waits Analysis dashboard.
deleted_charts_retention_time	7 days	Specifies the number of days that a custom chart (displayed on a user-defined dashboard) is stored.
deleted_probes_retention_time	7 days	Specifies the number of days that a custom probe (displayed on a user-defined dashboard) is stored.
download_chart_format	jpeg	Specifies the format in which a downloaded chart will be stored. May be jpeg or png.
flap-ping_detection_state_change	3	Specifies the number of state changes detected within a specified interval to define a given alert as flapping. Flapping starts when more than N state changes have occurred over $[N + 1 * (\min(\text{probe_interval}) * 2)]$ minutes and the fine state is not None. Where the default value of N is 2 or 3, and $\min(\text{probe_interval})$ is the smallest interval for all the probes used by the alert. Flapping ends when ZERO state changes have occurred over $[2 N * \min(\text{probe_interval})]$ minutes.
job_retention_time	30 days	Specifies the number of days that non-recurring scheduled tasks and their associated
long_running_transaction_minutes	5 minutes	Specifies the number of minutes a query executes for before being considered long running.
nagios_cmd_file_name	<file_name>	Specifies nagios command file to which passive service check result will be sent.
nagios_enabled	t	Specifies whether alert notification will be submitted to nagios or not.
nagios_medium_alert_as_critical	f	Specifies whether medium level PEM alert will be considered as critical in nagios.
nagios_spool_retention_time	7 days	Specifies the number of days to retain nagios messages in the spool table before they are discarded.
probe_log_retention_time	30 days	Specifies the number of days that probe log records are retained.
reminder_notification_interval	24 hours	Specifies the number of hours after which a reminder email is sent in case an alert has not been cleared.
server_log_retention_time	30 days	Specifies the number of days that the server log is retained on the PEM server.
show_data_tab_on_graph	false	If 'true', a Data tab is added to each graph. Select the Data tab to review the data that is plotted on the graph.
smtp_authentication	false	Specifies whether to enable/disable authentication over SMTP.
smtp_enabled	true	Specifies whether to enable/disable sending of emails.
smtp_encryption	false	Specifies whether to send SMTP email using an encrypted connection.
smtp_password		Specifies the password to be used to connect to the SMTP server.
smtp_port	25	Specifies the SMTP server port to be used for sending email.

continues on next page

Table 1 – continued from previous page

Parameter name	Value and Unit	Description
smtp_server	127.0.0.1	Specifies the SMTP server host address to be used for sending email.
smtp_spool_retention_time	7 days	Specifies the number of days to retain sent email messages in the spool table before they are discarded.
smtp_username		Specifies the username to be used to connect to SMTP server.
snmp_community	public	Specifies the SNMP community used when sending traps. Used only with SNMPv1 and SNMPv2.
snmp_enabled	true	Specifies whether to enable/disable sending SNMP traps.
snmp_port	162	Specifies the SNMP server port to be used for sending SNMP traps.
snmp_server	127.0.0.1	Specifies the SNMP server host address to be used for sending SNMP traps.
snmp_spool_retention_time	7 days	Specifies the number of days to retain sent traps in the spool table before they are discarded.
snmp_security_name		Specifies the user name or security name for sending SNMP traps. Used only with SNMPv3.
snmp_security_engine_id		Specifies the Engine id of the SNMP Agent on the SNMP Server. Used only with SNMPv3.
snmp_security_level	NOAUTH_NOPRIV	Specifies Security level and its possible values can be: AUTH_NOPRIV - Authentication, No Privacy or AUTH_PRIV - Authentication, Privacy or NOAUTH_NOPRIV - no Authentication, no Privacy. Used only with SNMPv3.
snmp_context_name		Specifies the Context name, the identifier for MIB objects when sending SNMP traps. Used only with SNMPv3.
snmp_context_engine_id		Specifies the Context engine id, the identifier for MIB objects when sending SNMP traps. If not specified, snmp_security_engine_id will be used. Used only with SNMPv3.
snmp_authentication_protocol	NONE	Specifies the authentication type for SNMP traps. Its possible values can be NONE, HMACMD5 or HMAC-SHA. Used only with SNMPv3.
snmp_privacy_protocol	NONE	Specifies the privacy protocol for SNMP traps. Its possible values can be NONE, DES, AES128, IDEA, AES192, or AES256. Used only with SNMPv3.
snmp_authentication_password		Specifies the authentication password associated with security name mentioned in snmp_security_name. Used only for SNMPv3.
snmp_privacy_password		Specifies the privacy password associated with security name mentioned in snmp_security_name. Used only for SNMPv3.
webclient_help_pg	EDB hosted documentation	Specifies the location of the online PostgreSQL core documentation.

19.2 Capacity Manager metrics - reference

Please Note that the Capacity Manager metrics available will vary by platform, and are subject to change. The available metrics may include the metrics described in the table below.

Metric Name	Description
# Dead Tuples	The number of dead tuples in the selected table.
# Dead Tuples+	The cumulative number of dead tuples in the selected table.
# Heap Tuples Fetched by Index Scans	The number of heap tuples fetched by index scans.
# Heap Tuples Fetched by Index Scans+	The cumulative number of heap tuples fetched by index scans.
# Idle Backends+	The cumulative number of currently idle backend clients.
# Index Scans	The number of index scans performed on the specified object.
# Index Scans+	The cumulative number of index scans performed on the specified object.
# Index Tuples Read	The number of index tuples read.
# Index Tuples Read+	The cumulative number of index tuples read.
# Live Tuples	The number of tuples visible to transactions.
# Live Tuples+	The cumulative number of tuples visible to transactions.
# Pages Estimated by ANALYZE	The number of pages estimated by ANALYZE.
# Pages Estimated by ANALYZE+	The cumulative number of pages estimated by ANALYZE.
# Sequential Scans	The number of sequential scans performed on the specific table.
# Sequential Scans+	The cumulative number of sequential scans performed on the specific table.
# Sequential Scan Tuples	The number of tuples sequentially scanned in the specific table.
# Sequential Scan Tuples+	The cumulative number of tuples sequentially scanned in the specific table.
# Tuples Deleted	The number of tuples deleted.
# Tuples Deleted+	The cumulative number of tuples deleted.
# Tuples Estimated by ANALYZE	The number of live (visible) tuples estimated by ANALYZE.
# Tuples Estimated by ANALYZE+	The cumulative number of live tuples estimated by ANALYZE.
# Tuples HOT Updated	The number of tuples HOT updated. In a HOT update, the new tuple resides in the same block as the original tuple and the tuples share an index entry.
# Tuples HOT Updated+	The cumulative number of tuples HOT updated.
# Tuples Inserted	The number of tuples inserted into the specified table.
# Tuples Inserted+	The cumulative number of tuples inserted into the specified table.
# Tuples Updated	The number of tuples updated in the selected table.
# Tuples Updated+	The cumulative number of tuples updated in the selected table.
Blocks Hit	The number of blocks found in the cache.
Blocks Hit+	The cumulative number of blocks found in the cache.
Blocks Read	The number of blocks read.
Blocks Read+	The cumulative number of blocks read.
Blocks Read from InfiniteCache	The number of blocks read from InfiniteCache.
Blocks Read from InfiniteCache+	The cumulative number of blocks read from InfiniteCache.
Blocks Written	The number of blocks written.
Blocks Written+	The cumulative number of blocks written.
Buffers Allocated	The number of buffers allocated.

continues on next page

Table 2 – continued from previous page

Metric Name	Description
Buffers Allocated+	The cumulative number of buffers allocated.
Buffers Written - Backends	The number of buffer blocks written to disk by server processes (processes connected to a client application).
Buffers Written - Backends+	The cumulative number of buffer blocks written to disk by server processes.
Buffers Written - Checkpoint	The number of blocks written to disk by the checkpoint process.
Buffers Written - Checkpoint+	The cumulative number of blocks written to disk by the checkpoint process.
Buffers Written - Cleaning Scan	The number of blocks written to disk by the autovacuum process.
Buffers Written - Cleaning Scan+	The cumulative number of blocks written to disk by the autovacuum process.
Bytes Received (KB)	The number of bytes received from the client (in kilobytes).
Bytes Received (KB)+	The cumulative number of bytes received (in kilobytes).
Bytes Sent (KB)	The number of bytes sent to the client (in kilobytes).
Bytes Sent (KB)+	The cumulative number of bytes sent (in kilobytes).
Checkpoints - Timed	The number of checkpoint operations triggered by the checkpoint interval.
Checkpoints - Timed+	The cumulative number of checkpoint operations triggered by the checkpoint interval.
Checkpoints - Untimed	The number of checkpoint operations triggered by checkpoint size.
Checkpoints - Untimed+	The cumulative number of checkpoint operations triggered by checkpoint size.
Database Size (MB)	The size of the specified database (in megabytes).
Free RAM Memory	The amount of free RAM memory (in megabytes).
Free Swap Memory	The amount of free swap space on disk (in megabytes).
Heap Blocks Hit	The number of heap blocks found in the cache.
Heap Blocks Hit+	The cumulative number of heap blocks found in the cache.
Heap Blocks Read	The number of heap blocks read.
Heap Blocks Read+	The cumulative number of heap blocks read.
Index Blocks Hit	The number of index blocks found in the cache.
Index Blocks Hit+	The cumulative number of index blocks found in the cache.
Index Blocks Read	The number of index blocks read.
Index Blocks Read+	The cumulative number of index blocks read.
Index Size (MB)	The size of the specified index (in megabytes).
In Packets Discards	The number of inbound packets discarded.
In Packets Discards+	The cumulative number of inbound packets discarded.
In Packets Errors	The number of inbound packets that contain errors.
In Packets Errors+	The cumulative number of inbound packets that contain errors.
Link Bandwidth (Mbit/s)	The speed of the network adapter (in megabits per second).
Load Average - 15 Minute	CPU saturation (in percent) - 15 minute sampling average.
Load Average - 1 Minute	CPU saturation (in percent) - 1 minute sampling average.
Load Average - 5 Minute	CPU saturation (in percent) - 5 minute sampling average.
Load Percentage	CPU saturation in percent.
Number of Prepared Transactions+	The cumulative number of prepared transactions.
Number of WAL Files+	The cumulative number of write-ahead log files.
Out Packets Discards	The number of outbound packets discarded.
Out Packets Discards+	The cumulative number of outbound packets discarded.
Out Packets Errors	The number of outbound packets that contain errors.
Out Packets Errors+	The cumulative number of outbound packets that contain errors.

continues on next page

Table 2 – continued from previous page

Metric Name	Description
Packets Received	The number of packets received.
Packets Received+	The cumulative number of packets received.
Packets Sent	The number of packets sent.
Packets Sent+	The cumulative number of packets sent.
Size (MB)	The total size of the disk (in megabytes).
Size of Indexes (MB)	The size of indexes on the specified table (in megabytes).
Space Available (MB)	The current disk space available (in megabytes).
Space Used (MB)	The current disk space used (in megabytes).
Table Size (MB)	The size of the specified table (in megabytes).
Tablespace Size (MB)	The size of the specified tablespace (in megabytes).
Temp Buffers (MB)	The size of temporary buffers (in megabytes).
Toast Blocks Hit	The number of TOAST blocks found in the cache.
Toast Blocks Hit+	The cumulative number of TOAST blocks found in the cache.
Toast Blocks Read	The number of TOAST blocks read.
Toast Blocks Read+	The cumulative number of TOAST blocks read.
Total RAM Memory	The total amount of RAM memory on the system (in megabytes).
Total Swap Memory	The total amount of swap space on the system (in megabytes).
Total Table Size w/Index and Toast	The total size of the specified table (including indexes and associated oversized attributes).
Transactions Aborted	The number of aborted transactions.
Transactions Aborted+	The cumulative number of aborted transactions.
Transactions Committed	The number of committed transactions.
Transactions Committed+	The cumulative number of committed transactions.
Tuples Deleted	The number of tuples deleted from the specified table.
Tuples Deleted+	The cumulative number of tuples deleted from the specified table.
Tuples Estimated by AN- ALYZE	The number of visible tuples in the specified table.
Tuples Estimated by AN- ALYZE+	The cumulative number of visible tuples in the specified table.
Tuples Fetched	The number of tuples fetched from the specified table.
Tuples Fetched+	The cumulative number of tuples fetched from the specified table.
Tuples HOT Updated	The number of tuples HOT updated. In a HOT update, the new tuple resides in the same block as the original tuple and the tuples share an index entry.
Tuples HOT Updated+	The cumulative number of tuples HOT updated. In a HOT update, the new tuple resides in the same block as the original tuple and the tuples share an index entry.
Tuples Inserted	The number of tuples inserted into the specified table.
Tuples Inserted+	The cumulative number of tuples inserted into the specified table.
Tuples Returned	The number of tuples returned in result sets.
Tuples Returned+	The cumulative number of tuples returned in result sets.
Tuples Updated	The number of tuples updated in the specified table.
Tuples Updated+	The cumulative number of tuples updated in the specified table.
WAL Segment Size (MB)	The segment size of the write-ahead log (in megabytes).

Note: The '+' following the name of a metric signifies that the data for the metric is gathered cumulatively; those metrics that are not followed by the '+' sign are collected as a 'point-in-time' value.

19.3 PEM probes – reference

A probe is a scheduled task that retrieves information about the database objects that are being monitored by the PEM agent. PEM uses the collected information to build the graphs displayed on each dashboard. The Manage Probes tab (accessed via the Management menu) allows you to modify the data collection schedule and the length of time that PEM will retain information returned by a specific probe.

Probe Name	Information Monitored by Probe	Level
Background Writer Statistics	This probe monitors information about the background writer. The information includes: The number of timed checkpoints The number of requested checkpoints The number of buffers written (by checkpoint) The number of buffers written (by background writer) The number of background writer cycles The number of background buffers written The number of buffers allocated	Server
Blocked Session Information	This probe provides information about blocked sessions.	Server
CPU Usage	This probe monitors CPU Usage information.	Agent
Data and Log File Analysis	This probe monitors information about log files. The information includes: The name of the log file The directory in which the log file resides	Server
Database Frozen XID	This probe monitors the frozen XID of each database.	Server
Database Size	This probe monitors information about the size of the monitored databases. The information includes: The time the information was gathered The database name The database size (in MB's).	Server
Database Statistics	This probe monitors database statistics. The information includes: The number of backends The number of transactions committed The number of transactions rolled back The number of blocks read The number of blocks hit The number of rows returned The number of rows fetched The number of rows inserted The number of rows updated The number of rows deleted	Server
Disk Busy Info	This probe monitors information about disk activity. Note: This probe is not supported on Mac OS X, Solaris or HP-UX	Agent
Disk Space	This probe monitors information about disk space usage. The information includes: The amount of disk space used The amount of disk space available	Agent
EDB Audit Configuration	This probe monitors the audit logging configuration of EDB Postgres Advanced Server.	Server
Failover Manager Cluster Info	This probe monitors a Failover Manager cluster, returning information about the cluster. This probe is disabled unless a cluster name and path of the Failover Manager binary is provided on the Server Properties dialog.	Server
Failover Manager Node Status	This probe monitors a Failover Manager cluster, returning detailed about each node within the cluster. This probe is disabled unless a cluster name and path of the Failover Manager binary is provided on the Server Properties dialog.	Server
Function Statistics	This probe monitors a database, retrieving information about functions. The information includes: Function names Argument types Return values	Database

continues on next page

Table 3 – continued from previous page

Probe Name	Information Monitored by Probe	Level
Index Size	This probe monitors a database, retrieving information about indexes. The information includes: The name of the index The time the data was gathered The size of the index (in MB's)	Database
Index Statistics	This probe monitors index statistics. The information includes: The number of index scans The number of rows read The number of rows fetched The number of blocks read The number of blocks hit	Database
Installed Packages	This probe monitors the packages that are currently installed. The information gathered includes: The name of the installed package The version of the installed package The date and time that the probe executed	Agent
IO Analysis	This probe monitors disk I/O information in. The information includes: The number of blocks read The number of blocks written The date and time that the probe executed Note: This probe is not supported on Mac OS X	Agent
Load Average	This probe monitors CPU load averages. The information includes: The 1-minute load average The 5-minute load average The 15-minute load average Note: This probe is not supported on Windows	Agent
Lock Information	This probe monitors lock information. The information includes: The database name The lock type The lock mode The process holding the lock	Server
Memory Usage	This probe monitors information about system memory usage. The information includes: Total RAM in MB Free RAM in MB Total swap memory in MB Free swap memory in MB Shared system memory in MB (It is used by tuning wizard to tune the memory parameters for the database server) - On non-windows system, it is <code>shmmmax</code> value and read from <code>/proc/sys/kernel/shmmmax</code> . - On windows, it is same as total memory.	Agent
Network Statistics	This probe monitors network statistics. The information includes: The interface IP address The number of packets sent The number of packets received The number of bytes sent The number of bytes received The link speed (in MB/second)	Agent
Number of Prepared Transactions	This probe stores the number of prepared transactions.	Server
Number of WAL Files	This probe monitors the number of WAL files.	Server
Object Catalog: Database	This probe monitors a list of databases and their properties. The information includes: The database name The database encoding type If the database allows user connections or system connections	Server
Object Catalog: Foreign Key	This probe monitors a list of foreign keys and their properties. The information includes: The name of the table that contains the foreign key The name of the table that the foreign key references The name of the database in which the table resides The name of the schema in which the table resides	Schema

continues on next page

Table 3 – continued from previous page

Probe Name	Information Monitored by Probe	Level
Object Catalog: Function	This probe monitors a list of functions and their properties. The information includes: The name of the function The name of the schema in which the function resides The name of the database in which the function resides	Schema
Object Catalog: Index	This probe monitors a list of indexes and their properties. The information includes: The name of the index The name of the table that the index is associated with The name of the database in which the indexed table resides	Schema
Object Catalog: Schema	This probe monitors a list of schemas and their associated databases and servers.	Database
Object Catalog: Sequence	This probe monitors a list of sequences and their properties.	Schema
Object Catalog: Table	This probe monitors a list of table information. The information includes: The table name The name of the schema in which the table resides The name of the database in which the schema resides A Boolean indicator that indicates if the table has a primary key	Schema
Object Catalog: Tablespace	This probe monitors a list of tablespaces.	Server
Operating System Information	This probe monitors the operating system details and boot time.	Agent
Package Catalog	This probe monitors the packages that are currently available for installation. The information gathered includes: The package name The package version	Agent
PG HBA Conf	This probe monitors authentication configuration information from the pg_hba.conf file.	Server
Server Information	This probe monitors server information.	Server
Session Information	This probe monitors session information. The information includes: The name of the session user The date and time that the session connected to the server The status of the session at the time that the information was gathered (idle, waiting, etc) The client address and port number	Server
Settings	This probe monitors the values currently assigned to GUC variables.	Server
SQL Protect	This probe monitors a server, retrieving information about SQL injection attacks.	Server
Slony Replication	This probe monitors lag data for clusters replicated using Slony.	Database
Streaming Replication	This probe monitors a cluster that is using streaming replication, retrieving information about: The sent Xlog location (in bytes) The write Xlog location (in bytes) The flush Xlog location (in bytes) The replay Xlog location (in bytes) The Xlog lag (in segments) The Xlog lag (in pages)	Server
Streaming Replication Lag Time	This probe monitors a cluster that is using streaming replication, retrieving lag information about: Replication lag time (in seconds) Current status of replication (running/paused)	Server

continues on next page

Table 3 – continued from previous page

Probe Name	Information Monitored by Probe	Level
Streaming Replication Database Conflicts	This probe monitors a database that is using streaming replication, retrieving information about any conflicts that arise. This includes information about queries that have been canceled due to: The # of drop tablespace conflicts The # of lock timeout conflicts The # of old snapshot conflicts The # of pinned buffer conflicts The # of deadlock conflicts	Server
Table Bloat	This probe monitors information about the current table bloat. The information includes: The name of the table The name of the schema in which the table resides The estimated number of pages The estimated number of wasted pages The estimated number of bytes per row	Database
Table Frozen XID	This probe monitors the frozen XID of each table.	Schema
Table Size	This probe monitors information about table size. The information includes: Table size (in MB's) Total index size (in MB's) Total table size, with indexes and TOAST (in MB's)	Database
Table Statistics	This probe monitors table statistics. The information includes: The number of sequential scans The number of sequential scan rows The number of index scans The number of index scan rows The number of rows inserted The number of rows updated The number of rows deleted The number of live rows The number of dead rows The last VACUUM The last auto-vacuum The last ANALYZE The last auto-analyze The number of pages estimated by ANALYZE The number of rows estimated by ANALYZE	Database
Tablespace Size	This probe monitors a list of tablespaces and their sizes.	Server
User Information	This probe monitors a list of the current users. The stored information includes: The user name The user type (superuser vs. non-superuser) The server to which the user is connected	Server
WAL Archive Status	This probe monitors the status of the WAL archive. The stored information includes: The # of WAL archives done The # of WAL archives pending The last archive time The # of WAL archives failed The time of the last failure	Server
xDB Replication	This probe monitors lag data for clusters replicated using xDB replication.	Database

19.4 PEM pre-defined alert templates – reference

An alert definition contains a system-defined or user-defined set of conditions that PEM compares to the system statistics; if the statistics deviate from the boundaries specified for that statistic, the alert triggers, and the PEM client displays a warning on the **Alerts Overview** page, and optionally sends a notification to a monitoring user.

The tables that follow list the system-defined alert templates that you can use to create an alert; please note that this list is subject to change, and may vary by system:

19.4.1 Templates applicable on agent

Template Name	Description
Load Average (1 minute)	1-minute system load average.
Load Average (5 minutes)	5-minute system load average.
Load Average (15 minutes)	15-minute system load average.
Load Average per CPU Core (1 minutes)	1-minute system load average per CPU core.
Load Average per CPU Core (5 minutes)	5-minute system load average per CPU core.
Load Average per CPU Core (15 minutes)	15-minute system load average per CPU core.
CPU utilization	Average CPU consumption.
Number of CPUs running higher than a	Number of CPUs running at greater than K% utilization threshold
Free memory percentage	Free memory as a percent of total system memory.
Memory used percentage	Percentage of memory used.
Swap consumption	Swap space consumed (in megabytes).
Swap consumption percentage	Percentage of swap area consumed.
Disk Consumption	Disk space consumed (in megabytes).
Disk consumption percentage	Percentage of disk consumed.
Disk Available	Disk space available (in megabytes).
Disk busy percentage	Percentage of disk busy.
Most used disk percentage	Percentage used of the most utilized disk on the system.
Total table bloat on host	The total space wasted by tables on a host, in MB.
Highest table bloat on host	The most space wasted by a table on a host, in MB.
Average table bloat on host	The average space wasted by tables on host, in MB.
Table size on host	The size of tables on host, in MB.
Database size on host	The size of databases on host, in MB.
Number of ERRORS in the logfile on agent N in last X hours.	The number of ERRORS in the logfile on agent N in last X hours
Number of WARNINGS in the logfile on agent N in last X hours	The number of WARNINGS in the logfile on agent N in last X hours.
Number of WARNINGS or ERRORS in the logfile on agent N in last X hours	The number of WARNINGS or ERRORS in the logfile on agent N in last X hours.
Package version mismatch	Check for package version mismatch as per catalog.
Total materialized view bloat on host	The total space wasted by materialized views on a host, in MB.
Highest materialized view bloat on host	The most space wasted by a materialized view on a host, in MB.
Average materialized view bloat on host	The average space wasted by materialized views on host, in MB.
Materialized view size on host	The size of materialized views on host, in MB.

continues on next page

Table 4 – continued from previous page

Template Name	Description
Agent Down	Specified agent is currently down.

19.4.2 Templates applicable on server

Template Name	Description
Total table bloat in server	The total space wasted by tables in server, in MB.
Largest table (by multiple of unbloated size)	Largest table in server, calculated as a multiple of its own estimated unbloated size; exclude tables smaller than N MB.
Highest table bloat in server	The most space wasted by a table in server, in MB.
Average table bloat in server	The average space wasted by tables in server, in MB.
Table size in server	The size of tables in server, in MB.
Database size in server	The size of databases in server, in MB.
Number of WAL files	Total number of Write Ahead Log files.
Number of prepared transactions	Number of transactions in prepared state.
Total connections	Total number of connections in the server.
Total connections as percentage of	Total number of connections in the server as a percentage of maximum
max_connections	connections allowed on server, settings.
Unused, non-superuser connections	Number of unused, non-superuser connections on the server, user_info, settings.
Unused, non-superuser connections as percentage of max_connections	Number of unused, non-superuser connections on the server as a percentage of max_connections of max_connections, user_info, settings.
Ungranted locks	Number of ungranted locks in server.
Percentage of buffers written by backends	The percentage of buffers written by backends vs. the total buffers written.
Percentage of buffers written by checkpoint	The percentage of buffers written by the checkpoints vs. the total buffers written.
Buffers written per second	Number of buffers written per second, over the last two probe cycles.
Buffers allocated per second	Number of buffers allocated per second, over the last two probe cycles.
Connections in idle state	Number of connections in server that are in idle state.
Connections in idle-in-transaction state	Number of connections in server that are in idle-in-transaction state.
Connections in idle-in-transaction state, as percentage of max_connections	Number of connections in server that are in idle-in-transaction state, as a percentage of maximum connections allowed on server, settings.
Long-running idle connections	Number of connections in the server that have been idle for more than N seconds.
Long-running idle connections and idle transactions	Number of connections in the server that have been idle or transactions idle-in-transaction for more than N seconds.
Long-running idle transactions	Number of connections in the server that have been idle in transaction for more than N seconds.

continues on next page

Table 5 – continued from previous page

Template Name	Description
Long-running transactions	Number of transactions in server that have been running for more than N seconds.
Long-running queries	Number of queries in server that have been running for more than N seconds.
Long-running vacuums	Number of vacuum operations in server that have been running for more than N seconds.
Long-running autovacuum	Number of autovacuum operations in server that have been running for more than N seconds.
Committed transactions percentage	Percentage of transactions in the server that committed vs. that rolled-back over last N minutes.
Shared buffers hit percentage	Percentage of block read requests in the server that were satisfied by shared buffers, over last N minutes.
Tuples inserted	Tuples inserted into server over last N minutes.
InfiniteCache buffers hit percentage	Percentage of block read requests in the server that were satisfied by InfiniteCache, over last N minutes.
Tuples fetched	Tuples fetched from server over last N minutes.
Tuples returned	Tuples returned from server over last N minutes.
Dead Tuples	Number of estimated dead tuples in server.
Tuples updated	Tuples updated in server over last N minutes.
Tuples deleted	Tuples deleted from server over last N minutes.
Tuples hot updated	Tuples hot updated in server, over last N minutes.
Sequential Scans	Number of full table scans in server, over last N minutes.
Index Scans	Number of index scans in server, over last N minutes.
Hot update percentage	Percentage of hot updates in the server over last N minutes.
Live Tuples	Number of estimated live tuples in server.
Dead tuples percentage	Percentage of estimated dead tuples in server.
Last Vacuum	Hours since last vacuum on the server.
Last AutoVacuum	Hours since last autovacuum on the server.
Last Analyze	Hours since last analyze on the server.
Last AutoAnalyze	Hours since last autoanalyze on the server.
Percentage of buffers written by backends over the last N minutes	The percentage of buffers written by backends vs. the total buffers backends over last N
Table Count	Total number of tables in server.
Function Count	Total number of functions in server.
Sequence Count	Total number of sequences in server.
A user expires in N days	Number of days before a user's validity expires.
Index size as a percentage of table size	Size of the indexes in server, as a percentage of their tables' size.
Largest index by table-size percentage oc_index, table_size.	Largest index in server, calculated as percentage of its table's size.
Number of ERRORS in the logfile on server M in the last X hours	The number of ERRORS in the logfile on server M in last X hours.
Number of WARNINGS in the logfile on server M in the last X hours	The number of WARNINGS in logfile on server M in the last X hours.

continues on next page

Table 5 – continued from previous page

Template Name	Description
Number of WARNINGS or ERRORS in the logfile on server M in the last X hours	The number of WARNINGS or ERRORS in the logfile on server M in the last X hours.
Number of attacks detected in the last N minutes	The number of SQL injection attacks occurred in the last N minutes.
Number of attacks detected in the last N minutes by username	The number of SQL injection attacks occurred in the last N minutes by username.
Number of replica servers lag behind the primary by write location	> Streaming Replication: number of replica servers lag behind the primary by write location.
Number of replica servers lag behind the primary by flush location	> Streaming Replication: number of replica servers lag behind the primary by flush location.
Number of replica servers lag behind the primary by replay location	> Streaming Replication: number of replica servers lag behind the primary by replay location.
Replica server lag behind the primary by write location	> Streaming Replication: replica server lag behind the primary by write location in MB.
Replica server lag behind the primary by flush location	> Streaming Replication: replica server lag behind the primary by flush location in MB.
Replica server lag behind the primary by replay location	> Streaming Replication: replica server lag behind the primary by replay location in MB.
Replica server lag behind the primary by size (MB)	> Streaming Replication: replica server lag behind the primary by size in MB.
Replica server lag behind the primary by WAL segments	> Streaming Replication: replica server lag behind the primary by WAL segments.
Replica server lag behind the primary by WAL pages	> Streaming Replication: replica server lag behind the primary by WAL pages.
Total materialized view bloat in server	The total space wasted by materialized views in server, in MB.
Largest materialized view (by multiple of unbloated size)	Largest materialized view in server, calculated as a multiple of its own estimated unbloated size; exclude materialized views smaller than N MB.
Highest materialized view bloat in server	The most space wasted by a materialized view in server, in MB.
Average materialized view bloat in server	The average space wasted by materialized views in server, in MB.
Materialized view size in server	The size of materialized view in server, in MB.
View Count	Total number of views in server.
Materialized View Count	Total number of materialized views in server.
Audit config mismatch	Check for audit config parameter mismatch
Server Down	Specified server is currently inaccessible.

continues on next page

Table 5 – continued from previous page

Template Name	Description
Number of WAL archives pending	Streaming Replication: number of WAL files pending to be replayed at replica.
Number of minutes lag of replica server from primary server	> Streaming Replication: number of minutes replica node is lagging behind the primary node.
Log config mismatch	Check for log config parameter mismatch.

19.4.3 Templates applicable on database

Template Name	Description
Total table bloat in database	The total space wasted by tables in database, in MB.
Largest table (by multiple of unbloated size)	Largest table in database, calculated as a multiple of its own estimated unbloated size; exclude tables smaller than N MB.
Highest table bloat in database	The most space wasted by a table in database, in MB.
Average table bloat in database	The average space wasted by tables in database, in MB.
Table size in database	The size of tables in database, in MB.
Database size	The size of the database, in MB.
Total connections	Total number of connections in the database.
Total connections as percentage of max_connections	Total number of connections in the database as a percentage of maximum connections allowed on server, settings.
Ungranted locks	Number of ungranted locks in database.
Connections in idle state	Number of connections in database that are in idle state.
Connections in idle-in-transaction state	Number of connections in database that are in idle-in-transaction state
Connections in idle-in-transaction state, as percentage of max_connections	Number of connections in database that are in idle-in-transaction state, as a percentage of maximum connections allowed on server, settings.
Long-running idle connections	Number of connections in the database that have been idle for more than N seconds.
Long-running idle connections and idle transactions	Number of connections in the database that have been idle or idle-in-transaction for more than N seconds.
Long-running idle transactions	Number of connections in the database that have been idle in transaction for more than N seconds.
Long-running transactions	Number of transactions in database that have been running for more than N seconds.
Long-running queries	Number of queries in database that have been running for more than N seconds.
Long-running vacuums	Number of vacuum operations in database that have been running for more than N seconds.
Long-running autovacums	Number of autovacuum operations in database that have been running for more than N seconds.
Committed transactions percentage	Percentage of transactions in the database that committed vs. that rolled-back over last N minutes.

continues on next page

Table 6 – continued from previous page

Template Name	Description
Shared buffers hit percentage	Percentage of block read requests in the database that were satisfied by shared buffers, over last N minutes.
InfiniteCache buffers hit percentage	Percentage of block read requests in the database that were satisfied by InfiniteCache, over last N minutes.
Tuples fetched	Tuples fetched from database over last N minutes.
Tuples returned	Tuples returned from database over last N minutes.
Tuples inserted	Tuples inserted into database over last N minutes.
Tuples updated	Tuples updated in database over last N minutes.
Tuples deleted	Tuples deleted from database over last N minutes.
Tuples hot updated	Tuples hot updated in database, over last N minutes.
Sequential Scans	Number of full table scans in database, over last N minutes.
Index Scans	Number of index scans in database, over last N minutes.
Hot update percentage	Percentage of hot updates in the database over last N minutes.
Live Tuples	Number of estimated live tuples in database.
Dead Tuples	Number of estimated dead tuples in database.
Dead tuples percentage	Percentage of estimated dead tuples in database.
Last Vacuum	Hours since last vacuum on the database.
Last AutoVacuum	Hours since last autovacuum on the database.
Last Analyze	Hours since last analyze on the database.
Last AutoAnalyze	Hours since last autoanalyze on the database.
Table Count	Total number of tables in database.
Function Count	Total number of functions in database.
Sequence Count	Total number of sequences in database.
Index size as a percentage of table size	Size of the indexes in database, as a percentage of their tables' size.
Largest index by table-size percentage	Largest index in database, calculated as percentage of its table's size, oc_index, table_size.
Database Frozen XID	The age (in transactions before the current transaction) of the database's frozen transaction ID.
Number of attacks detected in the	The number of SQL injection attacks occurred in the last N minutes. last N minutes
Number of attacks detected in the	The number of SQL injection attacks occurred in the last N minutes by last N minutes by username.
Queries that have been cancelled due to dropped tablespaces	Streaming Replication: number of queries that have been cancelled due to dropped tablespaces.
Queries that have been cancelled due to lock timeouts	Streaming Replication: number of queries that have been cancelled due to lock timeouts.
Queries that have been cancelled due to old snapshots	Streaming Replication: number of queries that have been cancelled due to old snapshots.
Queries that have been cancelled due to pinned buffers	Streaming Replication: number of queries that have been cancelled due to pinned buffers.
Queries that have been cancelled due to deadlocks	Streaming Replication: number of queries that have been cancelled due to deadlocks.
Total events lagging in all slony clusters	Slony Replication: total events lagging in all slony clusters.

continues on next page

Table 6 – continued from previous page

Template Name	Description
Events lagging in one slony cluster	Slony Replication: events lagging in one slony cluster.
Lag time (minutes) in one slony cluster	Slony Replication: lag time (minutes) in one slony cluster.
Total rows lagging in xdb single primary replication	> xDB Replication: Total rows lagging in xdb single primary replication
Total rows lagging in xdb multi primary replication	> xDB Replication: Total rows lagging in xdb multi primary replication.
Total materialized view bloat in database	The total space wasted by materialized views in database, in MB.
Largest materialized view (by multiple of unbloated size)	Largest materialized view in database, calculated as a multiple of its estimated unbloated size; exclude materialized views smaller than N MB.
Highest materialized view bloat in database	The most space wasted by a materialized view in database, in MB.
Average materialized view bloat in database	The average space wasted by materialized views in database, in MB.
Materialized view size in database	The size of materialized view in database, in MB.
View Count	Total number of views in database.
Materialized View Count	Total number of materialized views in database.

19.4.4 Templates applicable on schema

Template Name	Description
Total table bloat in schema	The total space wasted by tables in schema, in MB.
Largest table (by multiple of unbloated size)	Largest table in schema, calculated as a multiple of its own estimated unbloated size; exclude tables smaller than N MB.
Highest table bloat in schema	The most space wasted by a table in schema, in MB.
Average table bloat in schema	The average space wasted by tables in schema, in MB.
Table size in schema	The size of tables in schema, in MB.
Tuples inserted	Tuples inserted in schema over last N minutes.
Tuples updated	Tuples updated in schema over last N minutes.
Tuples deleted	Tuples deleted from schema over last N minutes.
Tuples hot updated	Tuples hot updated in schema, over last N minutes.
Sequential Scans	Number of full table scans in schema, over last N minutes.
Index Scans	Number of index scans in schema, over last N minutes.
Hot update percentage	Percentage of hot updates in the schema over last N minutes.
Live Tuples	Number of estimated live tuples in schema.
Dead Tuples	Number of estimated dead tuples in schema.
Dead tuples percentage	Percentage of estimated dead tuples in schema.
Last Vacuum	Hours since last vacuum on the schema.
Last AutoVacuum	Hours since last autovacuum on the schema.
Last Analyze	Hours since last analyze on the schema.
Last AutoAnalyze	Hours since last autoanalyze on the schema.
Table Count	Total number of tables in schema.

continues on next page

Table 7 – continued from previous page

Template Name	Description
Function Count	Total number of functions in schema.
Sequence Count	Total number of sequences in schema.
Index size as a percentage of table size	Size of the indexes in schema, as a percentage of their table's size.
Largest index by table-size percentage	Largest index in schema, calculated as percentage of its table's size, oc_index, table_size
Materialized View bloat	Space wasted by the materialized view, in MB.
Total materialized view bloat in schema	The total space wasted by materialized views in schema, in MB.
Materialized view size as a multiple of unbloated size	Size of the materialized view as a multiple of estimated unbloated size.
Largest materialized view (by multiple of unbloated size)	Largest materialized view in schema, calculated as a multiple of its own estimated unbloated size; exclude materialized view smaller than N MB.
Highest materialized view bloat in schema	The most space wasted by a materialized view in schema, in MB.
Average materialized view bloat in schema	The average space wasted by materialized views in schema, in MB.
Materialized view size	The size of materialized view, in MB.
Materialized view size in schema	The size of materialized views in schema, in MB.
View Count	Total number of views in schema.
Materialized View Count	Total number of materialized views in schema.
Materialized View Frozen XID	The age (in transactions before the current transaction) of the materialized view's frozen transaction ID.

19.4.5 Templates applicable on table

Template Name	Description
Table bloat	Space wasted by the table, in MB.
Table size	The size of table, in MB.
Table size as a multiple of unbloated size	Size of the table as a multiple of estimated unbloated size.
Tuples inserted	Tuples inserted in table over last N minutes.
Tuples updated	Tuples updated in table over last N minutes.
Tuples deleted	Tuples deleted from table over last N minutes.
Tuples hot updated	Tuples hot updated in table, over last N minutes.
Sequential Scans	Number of full table scans on table, over last N minutes.
Index Scans	Number of index scans on table, over last N minutes.
Hot update percentage	Percentage of hot updates in the table over last N minutes.
Live Tuples	Number of estimated live tuples in table.
Dead Tuples	Number of estimated dead tuples in table.
Dead tuples percentage	Percentage of estimated dead tuples in table.
Last Vacuum	Hours since last vacuum on the table.
Last AutoVacuum	Hours since last autovacuum on the table.
Last Analyze	Hours since last analyze on the table.
Last AutoAnalyze	Hours since last autoanalyze on the table.
Row Count	Estimated number of rows in a table.

continues on next page

Table 8 – continued from previous page

Template Name	Description
Index size as a percentage of table size	Size of the indexes on table, as a percentage of table's size.
Table Frozen XID	The age (in transactions before the current transaction) of the table's frozen transaction ID.

19.4.6 Global templates

Template Name	Description
Agents Down	Number of agents that haven't reported in recently.
Servers Down	Number of servers that are currently inaccessible.
Alert Errors	Number of alerts in an error state.